




# EA-R01 RF Controller

Electronic access

- **Durable, water-proof construction**
- **Dual sequenced output outputs minimize battery drain**
- **Fused 30 Amp outputs accommodate multiple latches**
- **Auxiliary light/horn output for visual/audible lock confirmation**
- **Labeled connections for easy setup**
- **Simple transmitter programming**
- **Integrate with any Southco Electromechanical latch solution**

### Recommended Southco EML solutions

R4-EM Electronic Rotary Latch




EM-99-124 Actuator



R4-99-308 Paddle Latch



Southco's EA-R01 series RF Controller provides peace of mind security with convenient and timesaving one touch remote locking and unlocking of multiple access points. With sealed electronics, high load capacity and simple installation, the controller is designed specifically for the environmental and storage needs of specialty vehicles, marine craft, recreational vehicles, off highway, and heavy duty trucks.

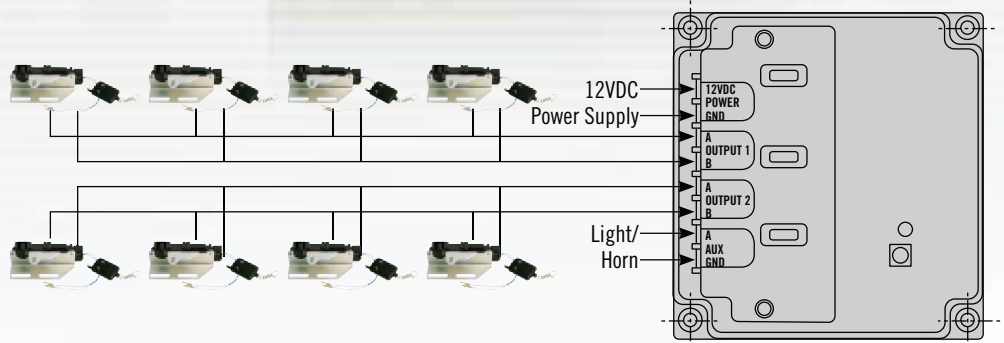

Other options available. For complete details on variety, part numbers, installation and specification, go to

**INFO CLIC** [www.southco.com/EA-R01](http://www.southco.com/EA-R01)

Dimensions in millimeters (inch) unless otherwise stated


**southco**  
CONNECT · CREATE · INNOVATE

# EA-R01 RF Controller


## Electronic access



### Transmitter

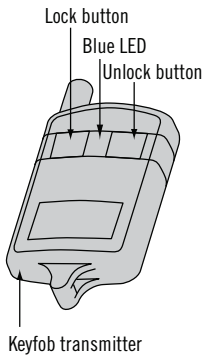

### Receiver

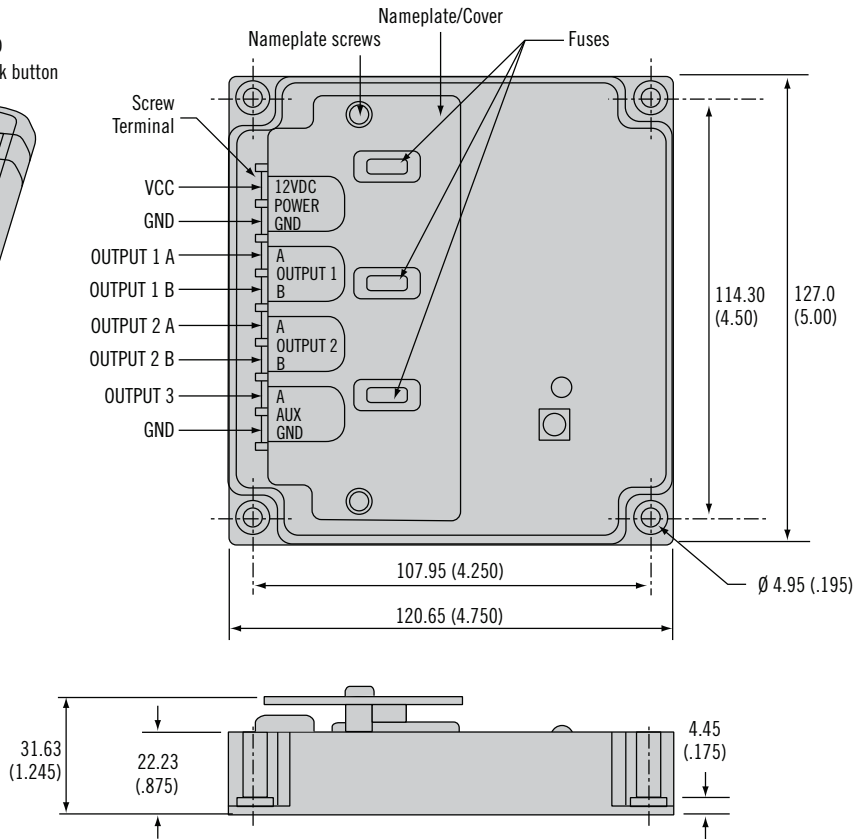

RF Controller Kit Part Number: EA-R01

Includes 1 receiver (EA-R01-201) and  
2 transmitters (EA-R01-101)

### Operation

Shipped with two pre-programmed transmitters

Press transmitter "UNLOCK" button Controller will produce a 12VDC pulse for 200ms on output 1 terminal A, followed by a 300ms pause followed by a 200ms 12VDC pulse on output 2, terminal A

After another 300ms pause, the controller will produce two 400ms pulses separated by a 200ms pause on the auxiliary light/horn output

Press transmitter "LOCK" button Controller will produce a 12VDC pulse for 200ms on output 1 terminal B, followed by a 300ms pause followed by a 200ms 12VDC pulse on output 2, terminal B

After another 300ms pause, the controller will produce one 400ms pulse on the auxiliary light/horn output

Simple push-button learn feature with LED feedback for enrolling transmitters. Note: EA-R01 shipped with 2 pre-programmed transmitters

Dimensions in millimeters (inch) unless otherwise stated



Global Corporate Headquarters and Americas Customer Service & Technical Support Center  
Tel: (1) 610-459-4000 · Fax: (1) 610-459-4012 · www.southco.com · info@southco.com

### Specifications

Receiver Power: 12VDC ( $\pm 25\%$ )  
Receiver Idle Current:  $\leq 10\text{mA}$   
Receiver Operating Current:  $\leq 30\text{A}$  momentary  
Receiver Outputs: Output 1 & 2: 30A polarity reversing relays  
Aux Output: 30A single pole relay  
Operating Range: up to 30.4m (100 ft)  
Operating Frequency: 340MHz  
Coding Type: Fixed Code  
Enclosure Rating: IP67  
Transmitter Power: Type 23 12VDC battery  
Receiver output fuses 15A Littelfuse 297 Series Mini® Fast-Acting automotive blade fuse or equivalent.

### Connection Details

All electrical connections are made via screw terminals accessible by removing 2 screws and name plate

Other options available. For complete details on variety, part numbers, installation and specification, go to



[www.southco.com/EA-R01](http://www.southco.com/EA-R01)

© Southco EA-R01 NA 02-10