

Precision Hinges

Hinge Leaf Aluminum, Bearing Bushings Bronze, Used as Joint

SPECIFICATION

Inner leaf type

- Type **A**: Tangential fastening with cylindrical recess
- Type **B**: Tangential fastening with tapped bushings
- Type **C**: Radial fastening with cylindrical recess
- Type **D**: Radial fastening with tapped bushings

Outer leaf type

- Type **A**: Tangential fastening with cylindrical recess
- Type **B**: Tangential fastening with tapped bushings
- Type **C**: Radial fastening with cylindrical recess
- Type **D**: Radial fastening with tapped bushings

Hinge leaf

Aluminum

Anodized, black **ALS**

Bearing bushings

Bronze

Hinge pin

Stainless steel AISI 420

Thrust washers

Stainless steel AISI 302

Adjusting screws

- Stainless steel AISI 303

- With thread locking
Complete nylon coating

Tapped bushings

Stainless steel AISI 303

INFORMATION

Precision hinges GN 7580 supply a pivoting movement to elements such as swing arms, spacers and clamping plates. The wear-resistant precision hinges feature low radial play and adjustable axial play.

A variety of installation situations can be covered by combining the various inner and outer leaves. Precise positioning can be achieved with dowel pins in the fit bores of the screw-on surfaces.


The bearing bushings and the tapped bushings of types B and D are supplied preassembled in the hinge leaves. The hinge pin, thrust washers and adjusting screws are packaged separately.


TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)
- Stainless Steel Characteristics (see page A26)



Assembly Instructions

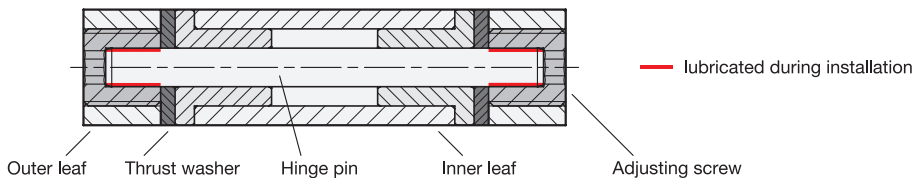


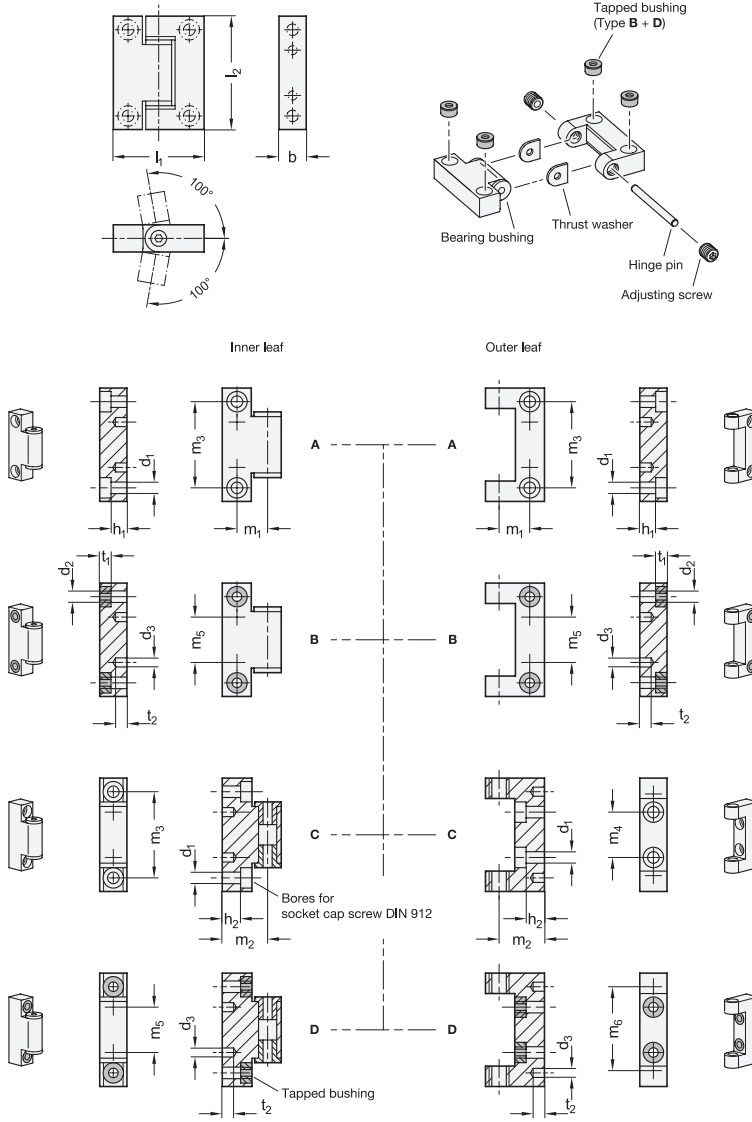

GN 7580

Description	l ₁	l ₂	b	d ₁	d ₂	d ₃ H7	h ₁	h ₂	m ₁	m ₂	m ₃	m ₄	m ₅	m ₆	t ₁	t ₂	⚖
GN 7580-ALS-40-50-A-A	40	50	12	5.1	-	4	7	-	13.5	20	38	-	20	-	5	9	66
GN 7580-ALS-40-50-A-B	40	50	12	5.1	M5	4	7	-	13.5	20	38	-	20	-	5	9	70
GN 7580-ALS-40-50-A-C	40	50	12	5.1	-	4	7	8.1	13.5	20	38	20	20	40	5	9	66
GN 7580-ALS-40-50-A-D	40	50	12	5.1	M5	4	7	8.1	13.5	20	38	20	20	40	5	9	70
GN 7580-ALS-40-50-B-A	40	50	12	5.1	M5	4	7	-	13.5	20	38	-	20	-	5	9	70
GN 7580-ALS-40-50-B-B	40	50	12	5.1	M5	4	7	-	13.5	20	38	-	20	-	5	9	74
GN 7580-ALS-40-50-B-C	40	50	12	5.1	M5	4	7	8.1	13.5	20	38	20	20	40	5	9	70
GN 7580-ALS-40-50-B-D	40	50	12	5.1	M5	4	7	8.1	13.5	20	38	20	20	40	5	9	74
GN 7580-ALS-40-50-C-A	40	50	12	5.1	-	4	7	8.1	13.5	20	38	-	20	-	5	9	66
GN 7580-ALS-40-50-C-B	40	50	12	5.1	M5	4	7	8.1	13.5	20	38	-	20	-	5	9	70
GN 7580-ALS-40-50-C-C	40	50	12	5.1	-	4	-	8.1	-	20	38	20	20	40	5	9	66
GN 7580-ALS-40-50-C-D	40	50	12	5.1	M5	4	-	8.1	-	20	38	20	20	40	5	9	70
GN 7580-ALS-40-50-D-A	40	50	12	5.1	M5	4	7	8.1	13.5	20	38	-	20	-	5	9	70
GN 7580-ALS-40-50-D-B	40	50	12	5.1	M5	4	7	8.1	13.5	20	38	-	20	-	5	9	74
GN 7580-ALS-40-50-D-C	40	50	12	5.1	M5	4	-	8.1	-	20	38	20	20	40	5	9	70
GN 7580-ALS-40-50-D-D	40	50	12	5.1	M5	4	-	8.1	-	20	38	20	20	40	5	9	74



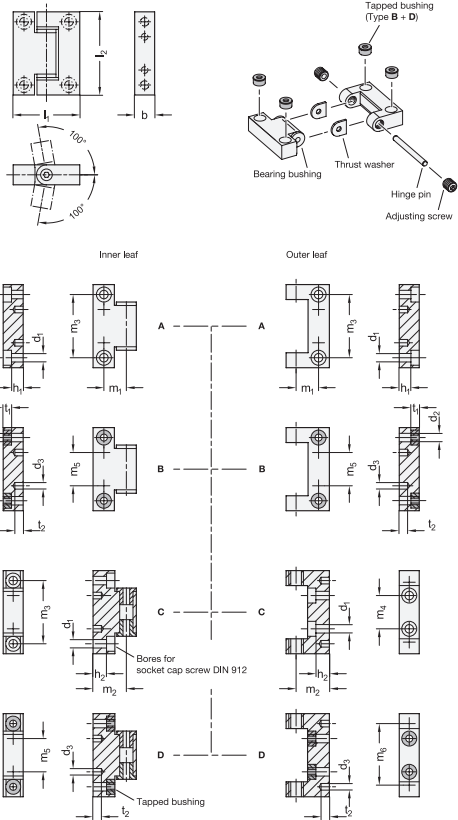

Description	l1	l2	b	d1	d2	d3 H7	h1	h2	m1	m2	m3	m4	m5	m6	t1	t2	△
GN 7580-ALS-55-70-A-A	55	70	16	6.1	-	5	10	-	18	27.5	56	-	26	-	6	11	184
GN 7580-ALS-55-70-A-B	55	70	16	6.1	M 6	5	10	-	18	27.5	56	-	26	-	6	11	190
GN 7580-ALS-55-70-A-C	55	70	16	6.1	-	5	10	12.3	18	27.5	56	26	26	56	6	11	184
GN 7580-ALS-55-70-A-D	55	70	16	6.1	M 6	5	10	12.3	18	27.5	56	26	26	56	6	11	190
GN 7580-ALS-55-70-B-A	55	70	16	6.1	M 6	5	10	-	18	27.5	56	-	26	-	6	11	191
GN 7580-ALS-55-70-B-B	55	70	16	6.1	M 6	5	10	-	18	27.5	56	-	26	-	6	11	197
GN 7580-ALS-55-70-B-C	55	70	16	6.1	M 6	5	10	12.3	18	27.5	56	26	26	56	6	11	191
GN 7580-ALS-55-70-B-D	55	70	16	6.1	M 6	5	10	12.3	18	27.5	56	26	26	56	6	11	197
GN 7580-ALS-55-70-C-A	55	70	16	6.1	-	5	10	12.3	18	27.5	56	-	26	-	6	11	184
GN 7580-ALS-55-70-C-B	55	70	16	6.1	M 6	5	10	12.3	18	27.5	56	-	26	-	6	11	190
GN 7580-ALS-55-70-C-C	55	70	16	6.1	-	5	-	12.3	-	27.5	56	26	26	56	6	11	184
GN 7580-ALS-55-70-C-D	55	70	16	6.1	M 6	5	-	12.3	-	27.5	56	26	26	56	6	11	190
GN 7580-ALS-55-70-D-A	55	70	16	6.1	M 6	5	10	12.3	18	27.5	56	-	26	-	6	11	190
GN 7580-ALS-55-70-D-B	55	70	16	6.1	M 6	5	10	12.3	18	27.5	56	-	26	-	6	11	197
GN 7580-ALS-55-70-D-C	55	70	16	6.1	M 6	5	-	12.3	-	27.5	56	26	26	56	6	11	190
GN 7580-ALS-55-70-D-D	55	70	16	6.1	M 6	5	-	12.3	-	27.5	56	26	26	56	6	11	197
GN 7580-ALS-75-100-A-A	75	100	22	8.1	-	6	14	-	25	37.5	80	-	45	-	8	13	478
GN 7580-ALS-75-100-A-B	75	100	22	8.1	M 8	6	14	-	25	37.5	80	-	45	-	8	13	490
GN 7580-ALS-75-100-A-C	75	100	22	8.1	-	6	14	16.8	25	37.5	80	45	45	80	8	13	478
GN 7580-ALS-75-100-A-D	75	100	22	8.1	M 8	6	14	16.8	25	37.5	80	45	45	80	8	13	490
GN 7580-ALS-75-100-B-A	75	100	22	8.1	M 8	6	14	-	25	37.5	80	-	45	-	8	13	490
GN 7580-ALS-75-100-B-B	75	100	22	8.1	M 8	6	14	-	25	37.5	80	-	45	-	8	13	503
GN 7580-ALS-75-100-B-C	75	100	22	8.1	M 8	6	14	16.8	25	37.5	80	45	45	80	8	13	490
GN 7580-ALS-75-100-B-D	75	100	22	8.1	M 8	6	14	16.8	25	37.5	80	45	45	80	8	13	503
GN 7580-ALS-75-100-C-A	75	100	22	8.1	-	6	14	16.8	25	37.5	80	-	45	-	8	13	477
GN 7580-ALS-75-100-C-B	75	100	22	8.1	M 8	6	14	16.8	25	37.5	80	-	45	-	8	13	490
GN 7580-ALS-75-100-C-C	75	100	22	8.1	-	6	-	16.8	-	37.5	80	45	45	80	8	13	477
GN 7580-ALS-75-100-C-D	75	100	22	8.1	M 8	6	-	16.8	-	37.5	80	45	45	80	8	13	490
GN 7580-ALS-75-100-D-A	75	100	22	8.1	M 8	6	14	16.8	25	37.5	80	-	45	-	8	13	490
GN 7580-ALS-75-100-D-B	75	100	22	8.1	M 8	6	14	16.8	25	37.5	80	-	45	-	8	13	503
GN 7580-ALS-75-100-D-C	75	100	22	8.1	M 8	6	-	16.8	-	37.5	80	45	45	80	8	13	490
GN 7580-ALS-75-100-D-D	75	100	22	8.1	M 8	6	-	16.8	-	37.5	80	45	45	80	8	13	503