


## 304-708-D - Medium Duty

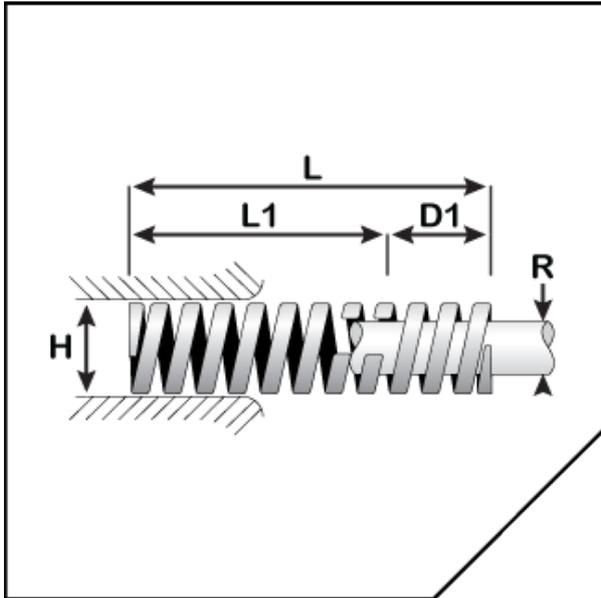

### Product Details

<b>Die Spring Type ()</b>	ISO-D-304
<b>Hole Fit, min (H) (mm)</b>	40.00
<b>Rod Fit, max (R) (mm)</b>	20.00
<b>Free Length (L) (mm)</b>	51
<b>Solid Height, Approx (mm)</b>	30.00
<b>Spring Rate (N/mm)</b>	170.3
<b>Load Length For Optimum Life, (L1) (mm)</b>	38.25
<b>Deflection For Optimum Life (D1) (mm)</b>	12.75
<b>Load at L1 (N)</b>	2171.3
<b>Load Length For Long Life (L2) (mm)</b>	35.70
<b>Deflection For Long Life (D2) (mm)</b>	15.30
<b>Load at L2 (N)</b>	2605.6
<b>Load Length For Max Operating Deflection (L3) (mm)</b>	30.60
<b>Maximum Operating Deflection (D3) (mm)</b>	20.40
<b>Load at L3 (N)</b>	3474.1
<b>Shipping Weight (kg)</b>	0.385
<b>Shipping Height (mm)</b>	40.00
<b>Shipping Length (mm)</b>	51.00