

Hinges

Technopolymer

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour or RAL 9016 white (C16), matte finish.

ROTATING PIN

Acetal resin based (POM) technopolymer, black colour or RAL 9016 white (C16), matte finish.

STANDARD EXECUTIONS



- **CFTX-SH**: pass-through holes for countersunk head screws.
- **CFTX-EH**: hexagonal pass-through holes for cylindrical head screws. This hinge with boss or stud can be obtained by means of hexagonal head nuts or screws fitted into the assembly hole.

ROTATION ANGLE (APPROXIMATE VALUE)

Max 200° (-20° and +180° being 0° the condition where the interconnected surfaces are on the same plane).

Do not exceed the rotation angle limit so as not to prejudice the hinge mechanical performance.

To choose the convenient type and the right number of hinges for your application, see the Guidelines (on page).




ELESA Original design

Resistance tests	AXIAL STRESS		RADIAL STRESS		90° ANGLED STRESS	
	Maximum working load Ea [N]	Load at breakage Ra [N]	Maximum working load Er [N]	Load at breakage Rr [N]	Maximum working load E90 [N]	Load at breakage R90 [N]
CFTX.40	300	1500	300	1500	200	750
CFTX.49	500	2900	400	3000	300	1600
CFTX.65	800	4500	800	4400	500	2200

CFTX-SH

CFTX-EH

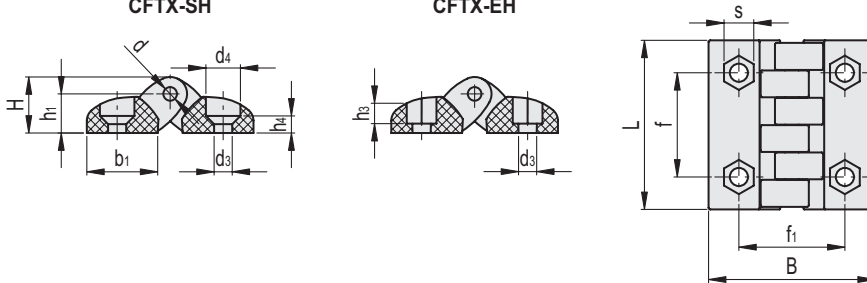

Code	Description	Code	Description	L	B	f±0.25	f1±0.25	H	h1	h3	h4	b1	d	d3	d4	s	C# [Nm]
427211	CFTX.40 SH-4	427216	CFTX.40 SH-4-C16	39.5	38.5	25	25	13	9	-	4.5	16.5	3	4.5	8.5	-	2 9
427231	CFTX.49 SH-5	427236	CFTX.49 SH-5-C16	49.5	49	30.5	31	16.5	11.5	-	5	21	4	5.5	10.5	-	2 22
427251	CFTX.65 SH-6	427256	CFTX.65 SH-6-C16	65	64	40	40	21.5	15	-	9	27.5	5	6.5	12.5	-	2 48
427201	CFTX.40 EH-4	427206	CFTX.40 EH-4-C16	39.5	39.5	25	25	13	9	4.5	-	16.5	3	4.5	-	7	2 9
427221	CFTX.49 EH-5	427226	CFTX.49 EH-5-C16	49.5	49	30.5	31	16.5	11.5	6	-	21	4	5.5	-	8	2 22
427222	CFTX.49 EH-6	427227	CFTX.49 EH-6-C16	49.5	49	30.5	31	16.5	11.5	6	-	21	4	6.5	-	10	2 22
427241	CFTX.65 EH-6	427246	CFTX.65 EH-6-C16	65	64	40	40	21.5	15	7.5	-	27.5	5	6.5	-	10	2 48

Suggested torque for screw assembly.

