

Lever latches with key

Quick-assembly, self-extinguishing technopolymer

MATERIAL

Glass-fibre reinforced polyamide-based (PA) technopolymer, black colour, certified self-extinguishing UL-94 V0.

PACKING RING

Silicone directly applied onto the back side of the stator head.

WASHER WITH ELASTIC FIXING WINGS AND SELF-TAPPING SCREWS

Stainless steel.

KEY

Polyamide based (PA) technopolymer.

ROTATION

90°.

IP PROTECTION

IP 65 protection class, according to table EN 60529 (see page A23).

STANDARD EXECUTIONS

- CQT/A: mark for two-wings key.
- CQT/T: mark for triangular key.

MAXIMUM CONTINUOUS WORKING TEMPERATURE

130°C.

DISASSEMBLY TOOL (TO BE ORDERED SEPARATELY)

Code 421550 ATTREZZO CQT.FM. in AISI 304 stainless steel.

FEATURES

Quick assembly with steel plate thickness ranging from 1 to 2 mm latches.

TECHNICAL DATA

The "V0" certification in accordance with UL-94 V (Underwriters Laboratories) (see Technical Data on page A5) indicates that on a plastic test sample with specific shape and dimensions, in the vertical position, the flame is extinguished within 10 seconds, without generating incandescent drops.

SPECIAL EXECUTIONS ON REQUEST

- Closing levers in zinc-plated steel.
- Latches and keys supplied separately.




ASSEMBLY INSTRUCTIONS

The latch is inserted in the mounting hole of the door on the lever side (see picture) until the wings of the elastic washer snap in, ensuring complete fastening.

The latches are supplied with assembled lever for faster mounting. Where needed, the latch can be disassembled from the inside of the door by means of a disassembling tool (to be ordered separately).



Drilling template

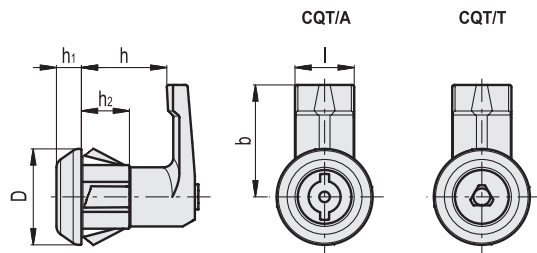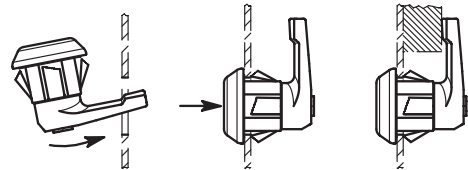

CQT/A

CQT/T

Code	Description	Code	Description	D	l	b	h	h1	h2	Δ
421530	CQT/A-FM-35-18-AE-VO	421535	CQT/T-FM-35-18-AE-VO	30	18.5	35	18	8	15	19
421531	CQT/A-FM-35-20-AE-VO	421536	CQT/T-FM-35-20-AE-VO	30	18.5	35	20	8	15	20
421532	CQT/A-FM-35-22-AE-VO	421537	CQT/T-FM-35-22-AE-VO	30	18.5	35	22	8	15	21
421533	CQT/A-FM-35-25-AE-VO	421538	CQT/T-FM-35-25-AE-VO	30	18.5	35	25	8	15	22
421534	CQT/A-FM-35-30-AE-VO	421539	CQT/T-FM-35-30-AE-VO	30	18.5	35	30	8	15	24

