


# DIN 39

Fixed handles

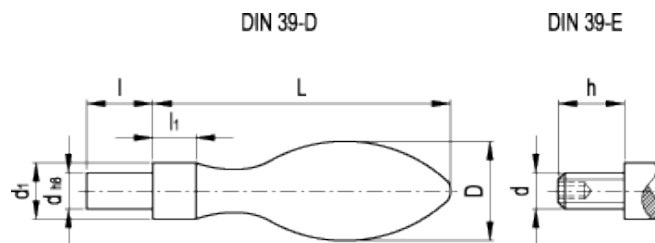

## technical informations

### Material

- Execution ST: mirror-polished steel.
- Execution KT: polyamide based (PA) technopolymer, black colour, matte finish (only type E for  $D = 20, 25, 32$ ) with black-oxide steel shank.

### Assembly

- Type E: pin with hexagon socket at threaded end.
- Type D: h8 tolerance plain pin (available only for execution ST).

Standard Elements	Main dimensions				Threaded pin			Weight
Description	D	L	$d_{1\ h13}$	$l_1$	d	$d_{h8}$	l	g
DIN 39-ST-16-D	16	54	10	7	-	7	11	43
DIN 39-ST-16-E	16	54	10	7	M6	-	11	45
DIN 39-ST-20-D	20	64	13	8	-	8	13	92
DIN 39-ST-20-E	20	64	13	8	M8	-	13	91
DIN 39-ST-25-D	25	80	16	10	-	10	14	182
DIN 39-ST-25-E	25	80	16	10	M10	-	14	177
DIN 39-ST-32-D	32	100	20	13	-	13	21	368
DIN 39-ST-32-E	32	100	20	13	M12	-	21	360
DIN 39-ST-36-D	36	112	22	14	-	16	26	512
DIN 39-ST-36-E	36	112	22	14	M16	-	26	526
DIN 39-KT-20-E	20	64	13	8	M8	-	13	25
DIN 39-KT-25-E	25	80	16	10	M10	-	14	50
DIN 39-KT-32-E	32	100	20	13	M12	-	21	100



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

**STANDARD MACHINE ELEMENTS WORLDWIDE**