


DIN 98

Revolving handles

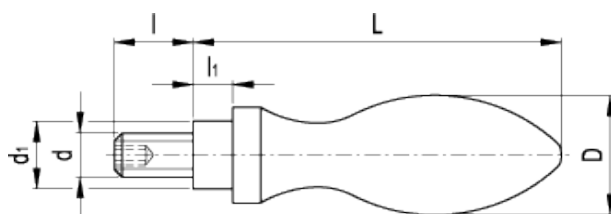

technical informations

Material

- Execution AL: fine turned aluminium.
- Execution ST: zinc-plated steel.
- Execution KT: polyamide based (PA) technopolymer, black colour, matte finish (only for $D = 16, 20, 25, 32$).

Assembly

Type E: zinc-plated steel shank, hexagon socket at threaded end.
Type D: zinc-plated steel shank.

Special executions

h8 plain shank (type D).

Standard Elements	Main dimensions				Threaded shank		Weight
Description	D	L	$d_{1\ h13}$	l_1	d	l	g
DIN 98-AL-16-E	16	54.5	10	5.5	M6	11	33
DIN 98-AL-20-E	20	67	13	6	M8	13	54
DIN 98-AL-25-E	25	83	16	8	M10	14	96
DIN 98-AL-32-E	32	105.5	20	10.5	M12	21	192
DIN 98-AL-36-E	36	117	22	11	M16	26	280
DIN 98-ST-16-E	16	54.5	10	5.5	M6	11	55
DIN 98-ST-20-E	20	67	13	6	M8	13	104
DIN 98-ST-25-E	25	83	16	8	M10	14	187
DIN 98-ST-32-E	32	105.5	20	10.5	M12	21	387
DIN 98-ST-36-E	36	117	22	11	M16	26	541
DIN 98-KT-16-E	16	54.5	10	5.5	M6	11	21
DIN 98-KT-20-E	20	67	13	6	M8	13	45
DIN 98-KT-25-E	25	83	16	8	M10	14	71
DIN 98-KT-32-E	32	105.5	20	10.5	M12	21	144



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE