

## Threaded fittings

for modular systems for lubrication, technopolymer

### MATERIAL

Acetal-based technopolymer (POM).

### STANDARD EXECUTIONS

- **FHJ**: BSPT conical threading, blue.
- **FHJ-NPT**: NPT conical threading, orange.

### FEATURES

Fitting to be implemented by means of snap coupling (Fig.1) with modular tubes FHT (see page -).

The use of PTFE tape on the threading is recommended to facilitate sealing.

See Modular systems for lubrication (on page -).

### CHEMICAL COMPATIBILITY

Material resistant to detergents, lubricants and oils, avoid contact with strong acids and bases.

To use fluids other than those listed, contact Elessa+Ganter's technical department.

In any case we suggest to verify the suitability of the product under the actual working conditions.

### SPECIAL EXECUTIONS ON REQUEST


- Threaded fittings made from raw materials suitable for contact with food (FDA CFR.21 and EU 10/2011).
- Fittings for modular systems with tubes with a diameter of 3/4".

### ACCESSORIES ON REQUEST

Pliers to assemble the components.



Fig.1

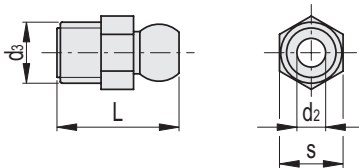

### FHJ

Code	Description	L	d2	d3	s	For modular system	⚖
471051	FHJ.1/4-1/8-BSPT	27	6	1/8 BSPT	14	1/4	2
471056	FHJ.1/4-1/4-BSPT	27	6	1/4 BSPT	14	1/4	3
471061	FHJ.1/2-3/8-BSPT	37	11	3/8 BSPT	19	1/2	7
471066	FHJ.1/2-1/2-BSPT	37	11	1/2 BSPT	22	1/2	10

### FHJ-NPT

Code	Description	L	d2	d3	s	For modular system	⚖
471058	FHJ.1/4-1/8-NPT	27	6	1/8 NPT	14	1/4	2
471059	FHJ.1/4-1/4-NPT	27	6	1/4 NPT	14	1/4	3
471068	FHJ.1/2-3/8-NPT	37	11	3/8 NPT	19	1/2	6
471069	FHJ.1/2-1/2-NPT	37	11	1/2 NPT	22	1/2	10