

## Forks

### Technopolymer

#### MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer.

#### STANDARD EXECUTIONS

Threaded hole.

- **FJT+PC:** with clip pin.
- **FJT+S:** with pin and seeger ring.

#### FEATURES AND APPLICATIONS


FJT. forks are remarkably suitable for actuation for example of pneumatic cylinders even when water and humidity are present.

Features of the technopolymer forks:



- totally corrosion resistant even when humidity and chemicals are present;
- high strength to saline mist;
- high mechanical strength to the applied loads;
- lightness combined with high-rigidity;
- resistant to continuous washing cycles with solvents and detergents, so they are suitable, for example, in applications in the food and pharmaceutical sectors;
- excellent shock-absorbing features;
- noise minimization.



FJT+PC



FJT+S

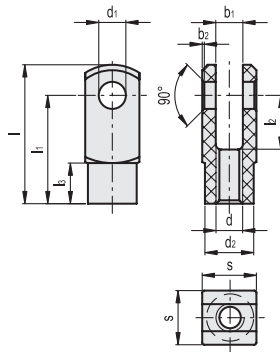

Resistance tests	Max static load under traction		Max transverse load	
	short term [N]	continuous [N]	short term [N]	continuous [N]
Description				
FJT-M6	1300	650	300	150
FJT-M8	2100	1050	650	325
FJT-M10	3000	1500	800	400
FJT-M10x1.25	3000	1500	800	400
FJT-M12	3500	1750	900	450
FJT-M12x1.25	3500	1750	900	450
FJT-M14	6100	3050	1000	500

The strength values are the result of lab tests carried out under room temperature (23°C).

#### FJT-PC

Code	Description	d6H	d1	d2	l	l1	l2	l3	b1	b2	s	⚖
470201	FJT-M6+PC	M6	6	10	31	24	12	9	6	0.5	12	4
470211	FJT-M8+PC	M8	8	14	42	32	16	12	8	0.5	16	9
470221	FJT-M10+PC	M10	10	18	52	40	20	15	10	0.5	20	16
470222	FJT-M10x1.25+PC	M10x1.25	10	18	52	40	20	15	10	0.5	20	16
470231	FJT-M12+PC	M12	12	20	62	48	24	18	12	0.5	24	28
470232	FJT-M12x1.25+PC	M12x1.25	12	20	62	48	24	18	12	0.5	24	28
470241	FJT-M14+PC	M14	14	24	72	56	28	22.5	14	0.5	27	42

#### FJT-S

Code	Description	d6H	d1	d2	l	l1	l2	l3	b1	b2	s	⚖
470301	FJT-M6+S	M6	6	10	31	24	12	9	6	0.5	12	3
470311	FJT-M8+S	M8	8	14	42	32	16	12	8	0.5	16	8
470321	FJT-M10+S	M10	10	18	52	40	20	15	10	0.5	20	15
470322	FJT-M10x1.25+S	M10x1.25	10	18	52	40	20	15	10	0.5	20	15
470331	FJT-M12+S	M12	12	20	62	48	24	18	12	0.5	24	25
470332	FJT-M12x1.25+S	M12x1.25	12	20	62	48	24	18	12	0.5	24	25
470341	FJT-M14+S	M14	14	24	72	56	28	22.5	14	0.5	27	41

