

Stainless Steel-Cover sleeves

Hygienic Design

SPECIFICATION

Stainless Steel AISI 304

Sealing ring

H-NBR **H**

temperature resistant -25 °C to +150 °C

EPDM **E**

temperature resistant -40 °C to +120 °C

- blue
- Hardness 85±5 Shore A
- FDA compliant




INFORMATION


Stainless Steel-Cover sleeves GN 20.1 are intended for use in hygienic areas. These cover protruding male threads while also substituting for lock nuts. The sealed mounting surfaces enable fastening without dead spaces. The high quality finish prevents adherence of dirt and facilitates cleaning.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Elastomer characteristics (see page A32)

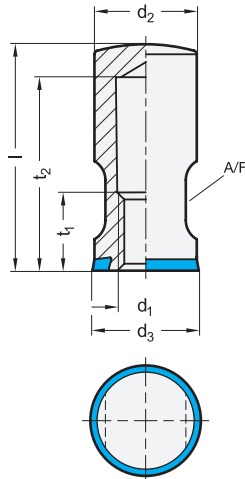

Application example

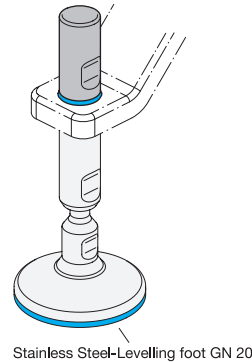

GN 20.1-H

STAINLESS STEEL

Description	d1	l	d2	d3	A/F	t1	t2	⚖
GN 20.1-M12-56-H	M 12	56	25	25.8	19	15.5	50	159
GN 20.1-M16-62-H	M 16	62	28	28.8	22	20.5	55	200
GN 20.1-M20-68-H	M 20	68	32	32.8	27	25.5	60	272
GN 20.1-M24-74-H	M 24	74	36	36.8	30	30.5	65	352

GN 20.1-E

STAINLESS STEEL

Description	d1	l	d2	d3	A/F	t1	t2	⚖
GN 20.1-M12-56-E	M 12	56	25	25.8	19	15.5	50	159
GN 20.1-M16-62-E	M 16	62	28	28.8	22	20.5	55	200
GN 20.1-M20-68-E	M 20	68	32	32.8	27	25.5	60	272
GN 20.1-M24-74-E	M 24	74	36	36.8	30	30.5	65	352