

## Adjustable hand levers

Zinc die casting, Bushing / Threaded bolt  
Stainless Steel

### SPECIFICATION

Handle

Zinc die casting

plastic coated

black, RAL 9005, textured finish **SW**

black, RAL 9011, silk finish **SZ**

orange, RAL 2004, textured finish **OS**

red, RAL 3000, textured finish **RS**

silver, RAL 9006, textured finish **SR**

chrome-plated **CR**

uncoated, slide grinded **RH**

### Version with threaded insert

Threaded insert and retaining screw

Stainless Steel AISI 303

### Version with threaded stud

Threaded stud and retaining screw

Stainless Steel AISI 303


### INFORMATION

Adjustable hand levers GN 300.1 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. The centre insert is connected to the lever via serrations which can easily be disengaged.

Pulling the lever, disengages the serrations and allowing it to be swivelled to the ideal clamping position. On releasing the lever the serrations automatically re-engage.

### TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

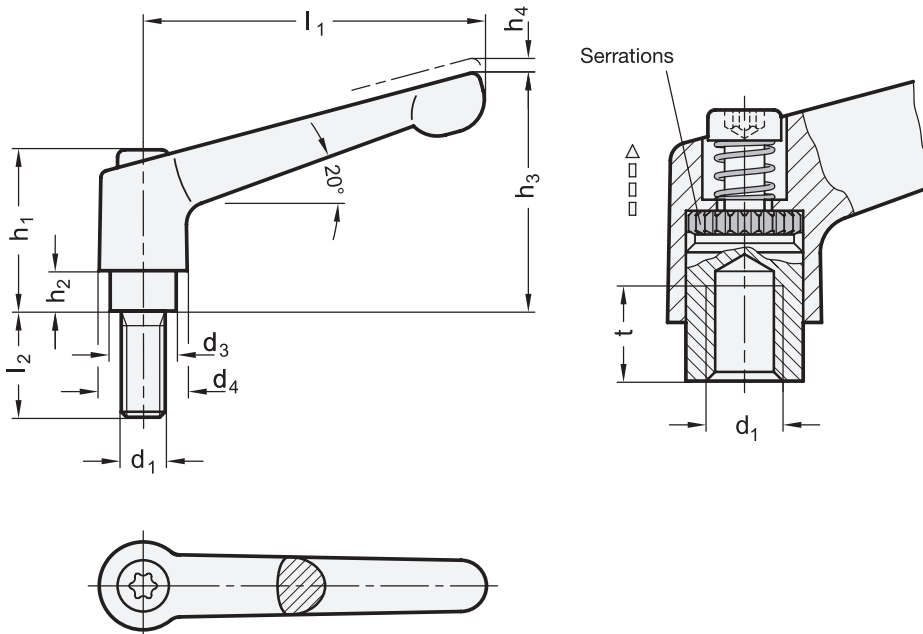

\* Complete with colour index of the clamping lever body (SW, SZ, OS, RS, SR, CR or RH)

SW RAL9005  
 SZ RAL9011  
 OS RAL2004  
 RS RAL3000  
 SR RAL9006  
 CR chrome-plated  
 RH uncoated

### GN 300.1-with threaded insert

Description	l1	d1	d3	d4	h1	h2	h3	h4	t min.	Δ
GN 300.1-30-M3-*	30	M 3	10	13	24.5	4	31	3.5	7	27
GN 300.1-30-M4-*	30	M 4	10	13	24.5	4	31	3.5	8	27
GN 300.1-30-M5-*	30	M 5	10	13	24.5	4	31	3.5	8	26
GN 300.1-30-M6-*	30	M 6	10	13	24.5	4	31	3.5	8	25
GN 300.1-45-M4-*	45	M 4	10	13	24.5	4	34	3.5	8	34
GN 300.1-45-M5-*	45	M 5	10	13	24.5	4	34	3.5	8	33
GN 300.1-45-M6-*	45	M 6	10	13	24.5	4	34	3.5	8	32
GN 300.1-63-M6-*	63	M 6	13.5	17.5	31	6.5	45	4	11	76
GN 300.1-63-M8-*	63	M 8	13.5	17.5	31	6.5	45	4	11	75
GN 300.1-78-M8-*	78	M 8	16	21	36	8	54	4	14	123
GN 300.1-78-M10-*	78	M 10	16	21	36	8	54	4	14	119
GN 300.1-92-M10-*	92	M 10	19	24	43	11	64	4	17	184
GN 300.1-92-M12-*	92	M 12	19	24	43	11	64	4	17	178
GN 300.1-108-M12-*	108	M 12	23	30	50.5	12	75	5	22	306
GN 300.1-108-M16-*	108	M 16	23	30	50.5	12	75	5	22	289

### GN 300.1-with threaded stud

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4	Δ
GN 300.1-30-M3-6-*	30	M 3	6	10	13	24.5	4	31	3.5	27
GN 300.1-30-M3-8-*	30	M 3	8	10	13	24.5	4	31	3.5	28
GN 300.1-30-M3-10-*	30	M 3	10	10	13	24.5	4	31	3.5	28
GN 300.1-30-M3-12-*	30	M 3	12	10	13	24.5	4	31	3.5	30
GN 300.1-30-M3-16-*	30	M 3	16	10	13	24.5	4	31	3.5	30
GN 300.1-30-M4-12-*	30	M 4	12	10	13	24.5	4	31	3.5	28
GN 300.1-30-M4-16-*	30	M 4	16	10	13	24.5	4	31	3.5	28
GN 300.1-30-M4-20-*	30	M 4	20	10	13	24.5	4	31	3.5	29
GN 300.1-30-M4-25-*	30	M 4	25	10	13	24.5	4	31	3.5	30
GN 300.1-30-M4-32-*	30	M 4	32	10	13	24.5	4	31	3.5	31
GN 300.1-30-M5-12-*	30	M 5	12	10	13	24.5	4	31	3.5	29
GN 300.1-30-M5-16-*	30	M 5	16	10	13	24.5	4	31	3.5	29
GN 300.1-30-M5-20-*	30	M 5	20	10	13	24.5	4	31	3.5	29
GN 300.1-30-M5-25-*	30	M 5	25	10	13	24.5	4	31	3.5	30
GN 300.1-30-M5-32-*	30	M 5	32	10	13	24.5	4	31	3.5	31
GN 300.1-30-M5-40-*	30	M 5	40	10	13	24.5	4	31	3.5	32
GN 300.1-30-M5-50-*	30	M 5	50	10	13	24.5	4	31	3.5	33
GN 300.1-30-M6-12-*	30	M 6	12	10	13	24.5	4	31	3.5	29
GN 300.1-30-M6-16-*	30	M 6	16	10	13	24.5	4	31	3.5	30
GN 300.1-30-M6-20-*	30	M 6	20	10	13	24.5	4	31	3.5	31
GN 300.1-30-M6-25-*	30	M 6	25	10	13	24.5	4	31	3.5	32
GN 300.1-30-M6-32-*	30	M 6	32	10	13	24.5	4	31	3.5	33
GN 300.1-30-M6-40-*	30	M 6	40	10	13	24.5	4	31	3.5	34
GN 300.1-30-M6-50-*	30	M 6	50	10	13	24.5	4	31	3.5	35
GN 300.1-45-M4-12-*	45	M 4	12	10	13	24.5	4	34	3.5	35
GN 300.1-45-M4-16-*	45	M 4	16	10	13	24.5	4	34	3.5	36
GN 300.1-45-M4-20-*	45	M 4	20	10	13	24.5	4	34	3.5	35
GN 300.1-45-M4-25-*	45	M 4	25	10	13	24.5	4	34	3.5	37
GN 300.1-45-M4-32-*	45	M 4	32	10	13	24.5	4	34	3.5	38
GN 300.1-45-M5-12-*	45	M 5	12	10	13	24.5	4	34	3.5	35
GN 300.1-45-M5-16-*	45	M 5	16	10	13	24.5	4	34	3.5	36
GN 300.1-45-M5-20-*	45	M 5	20	10	13	24.5	4	34	3.5	37
GN 300.1-45-M5-25-*	45	M 5	25	10	13	24.5	4	34	3.5	38
GN 300.1-45-M5-32-*	45	M 5	32	10	13	24.5	4	34	3.5	38
GN 300.1-45-M5-40-*	45	M 5	40	10	13	24.5	4	34	3.5	39
GN 300.1-45-M5-50-*	45	M 5	50	10	13	24.5	4	34	3.5	43



3

Clamping levers

\* Complete with colour index of the clamping lever body (SW, SZ, OS, RS, SR, CR or RH)

SW SZ OS RS SR CR RH  
 RAL9005 RAL9011 RAL2004 RAL3000 RAL9006 chrome-plated uncoated

### GN 300.1-with threaded stud

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4	$\Delta$
GN 300.1-45-M6-12-*	45	M 6	12	10	13	24.5	4	34	3.5	36
GN 300.1-45-M6-16-*	45	M 6	16	10	13	24.5	4	34	3.5	37
GN 300.1-45-M6-20-*	45	M 6	20	10	13	24.5	4	34	3.5	38
GN 300.1-45-M6-25-*	45	M 6	25	10	13	24.5	4	34	3.5	39
GN 300.1-45-M6-32-*	45	M 6	32	10	13	24.5	4	34	3.5	39
GN 300.1-45-M6-40-*	45	M 6	40	10	13	24.5	4	34	3.5	40
GN 300.1-45-M6-50-*	45	M 6	50	10	13	24.5	4	34	3.5	43
GN 300.1-63-M6-16-*	63	M 6	16	13.5	17.5	31	6.5	45	4	80
GN 300.1-63-M6-20-*	63	M 6	20	13.5	17.5	31	6.5	45	4	91
GN 300.1-63-M6-25-*	63	M 6	25	13.5	17.5	31	6.5	45	4	82
GN 300.1-63-M6-32-*	63	M 6	32	13.5	17.5	31	6.5	45	4	83
GN 300.1-63-M6-40-*	63	M 6	40	13.5	17.5	31	6.5	45	4	85
GN 300.1-63-M6-50-*	63	M 6	50	13.5	17.5	31	6.5	45	4	86
GN 300.1-63-M8-16-*	63	M 8	16	13.5	17.5	31	6.5	45	4	84
GN 300.1-63-M8-20-*	63	M 8	20	13.5	17.5	31	6.5	45	4	85
GN 300.1-63-M8-25-*	63	M 8	25	13.5	17.5	31	6.5	45	4	87
GN 300.1-63-M8-32-*	63	M 8	32	13.5	17.5	31	6.5	45	4	89
GN 300.1-63-M8-40-*	63	M 8	40	13.5	17.5	31	6.5	45	4	91
GN 300.1-63-M8-50-*	63	M 8	50	13.5	17.5	31	6.5	45	4	93
GN 300.1-63-M8-63-*	63	M 8	63	13.5	17.5	31	6.5	45	4	98
GN 300.1-78-M8-20-*	78	M 8	20	16	21	36	8	54	4	137
GN 300.1-78-M8-25-*	78	M 8	25	16	21	36	8	54	4	138
GN 300.1-78-M8-32-*	78	M 8	32	16	21	36	8	54	4	139
GN 300.1-78-M8-40-*	78	M 8	40	16	21	36	8	54	4	140
GN 300.1-78-M8-50-*	78	M 8	50	16	21	36	8	54	4	144
GN 300.1-78-M8-63-*	78	M 8	63	16	21	36	8	54	4	148
GN 300.1-78-M8-80-*	78	M 8	80	16	21	36	8	54	4	156
GN 300.1-78-M10-20-*	78	M10	20	16	21	36	8	54	4	139
GN 300.1-78-M10-25-*	78	M10	25	16	21	36	8	54	4	140
GN 300.1-78-M10-32-*	78	M10	32	16	21	36	8	54	4	142
GN 300.1-78-M10-40-*	78	M10	40	16	21	36	8	54	4	149
GN 300.1-78-M10-50-*	78	M10	50	16	21	36	8	54	4	154
GN 300.1-78-M10-63-*	78	M10	63	16	21	36	8	54	4	161
GN 300.1-78-M10-80-*	78	M10	80	16	21	36	8	54	4	166
GN 300.1-92-M10-20-*	92	M10	20	19	24	43	11	64	4	202
GN 300.1-92-M10-25-*	92	M10	25	19	24	43	11	64	4	205
GN 300.1-92-M10-32-*	92	M10	32	19	24	43	11	64	4	209
GN 300.1-92-M10-40-*	92	M10	40	19	24	43	11	64	4	213
GN 300.1-92-M10-50-*	92	M10	50	19	24	43	11	64	4	219
GN 300.1-92-M10-63-*	92	M10	63	19	24	43	11	64	4	225
GN 300.1-92-M10-80-*	92	M10	80	19	24	43	11	64	4	235
GN 300.1-92-M12-20-*	92	M12	20	19	24	43	11	64	4	209
GN 300.1-92-M12-25-*	92	M12	25	19	24	43	11	64	4	215
GN 300.1-92-M12-32-*	92	M12	32	19	24	43	11	64	4	220
GN 300.1-92-M12-40-*	92	M12	40	19	24	43	11	64	4	222
GN 300.1-92-M12-50-*	92	M12	50	19	24	43	11	64	4	233
GN 300.1-92-M12-63-*	92	M12	63	19	24	43	11	64	4	242
GN 300.1-92-M12-80-*	92	M12	80	19	24	43	11	64	4	250
GN 300.1-108-M16-32-*	108	M16	32	23	30	50.5	12	75	5	365
GN 300.1-108-M16-40-*	108	M16	40	23	30	50.5	12	75	5	376
GN 300.1-108-M16-50-*	108	M16	50	23	30	50.5	12	75	5	388
GN 300.1-108-M16-63-*	108	M16	63	23	30	50.5	12	75	5	407
GN 300.1-108-M16-80-*	108	M16	80	23	30	50.5	12	75	5	429



Clamping levers 3