


Solid handwheels with revolving handle

- **Cast aluminium** with black epoxy resin coating.
- **Turned rim**, all sides.
- **Hub** with:
 - B** = standard H7 tolerance plain bore
 - K** = standard H7 tolerance reamed bore with DIN 6885/1 P9 keyway (see table on page 669).
- **Axial retaining washer** (on request) type GN 184 (page 452).
- Axial and radial runout lower than IT 12.
- Black polyamide based (PA) technopolymer **revolving handle**.
Resistant to solvents, oils, greases and other chemical agents.

GN 321 solid handwheels are available with GN 000.4 or GN 000.5 safety coupling bushings assembled (GN 000.4, GN 000.5 see page 90-91).

For fixing GN 323 on shafts by a grub screw see GN 110 drilling technical information on page 668.

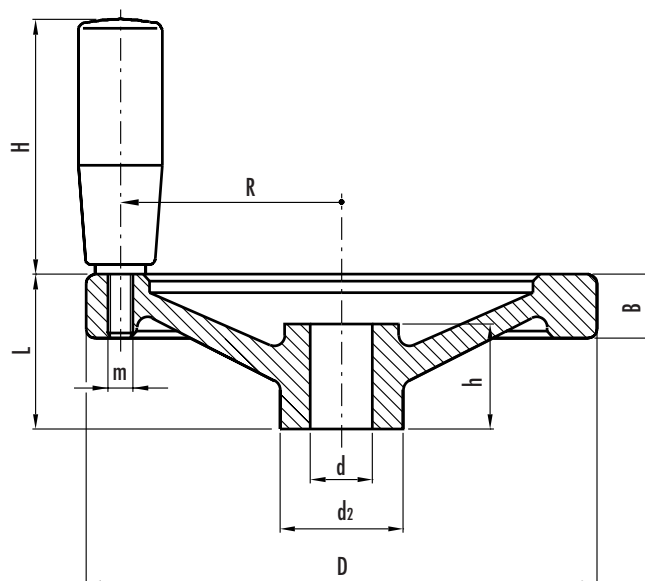

Standard elements	Main dimensions				Bore			Handle				Weight
Description	D	L	B	d1	d H7	h	keyway	H	Ø	m	R	grams
GN 323-80-B10-D GN 323-80-K10-D	80	26	13	26	10	16	•	42.5	18	M6	33.5	162 160
GN 323-100-B10-D GN 323-100-K10-D	100	30	14	28	10	17	•	52.5	21	M6	42.5	251 249
GN 323-125-B12-D GN 323-125-K12-D	125	33	15	31	12	18	•	67.5	23	M8	54	397 394
GN 323-140-B14-D GN 323-140-K14-D	140	36	16.5	36	14	19	•	67.5	23	M8	61	514 510
GN 323-160-B14-D GN 323-160-K14-D	160	39	18	36	14	20	•	82.5	26	M10	71	669 664
GN 323-200-B18-D GN 323-200-K18-D	200	45	20.5	42	18	24	•	82.5	26	M10	89	1030 1025
GN 323-250-B22-D GN 323-250-K22-D	250	51	23	48	22	28	•	92.5	28	M10	113	1666 1661