
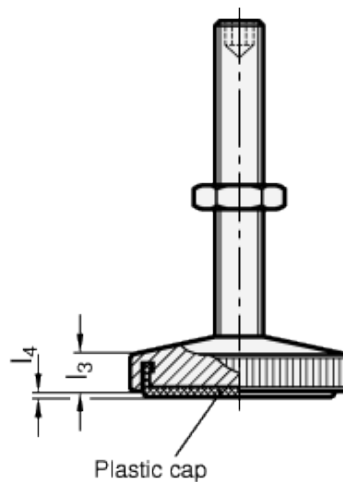


GN 339

Levelling elements

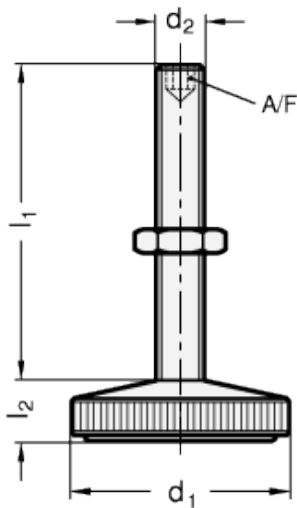

technical informations

Material

Version ST: zinc-plated steel (tensile strength 500 N/mm²), blue passivated.

Plastic caps

- Version KS: technopolymer Polyacetal (POM), white natural colour, gliding.
- Version KR: technopolymer rubber (TPE), 78 Shore A \approx hardness, black colour, non-gliding.

Hexagon nut

Zinc-plated steel, blue passivated.

Features and applications

Levelling element GN 339 are used for applications in cases where no jointed link is required between foot and adjusting screw. For this reason they offer the advantage of reduced height. The gliding and/or the non-gliding protective cap is safely fixed in the foot.

Standard Elements	Main dimensions							Weight
Description	d ₁	d ₂	l ₁	l ₂ -	l ₃ -	l ₄	A/F	g
GN 339-29-M6-30-KS-ST	29	M 6	30	8	5	1	3	34
GN 339-29-M6-30-KR-ST	29	M 6	30	8	5	0.4	3	30
GN 339-29-M6-45-KS-ST	29	M 6	45	8	5	1	3	36
GN 339-29-M6-45-KR-ST	29	M 6	45	8	5	0.4	3	32
GN 339-29-M8-35-KS-ST	29	M 8	35	8	5	1	4	41
GN 339-29-M8-35-KR-ST	29	M 8	35	8	5	0.4	4	37
GN 339-29-M8-55-KS-ST	29	M 8	55	8	5	1	4	48
GN 339-29-M8-55-KR-ST	29	M 8	55	8	5	0.4	4	43
GN 339-36-M8-40-KS-ST	36	M 8	40	9	6	1	4	64
GN 339-36-M8-40-KR-ST	36	M 8	40	9	6	0.5	4	56
GN 339-36-M8-65-KS-ST	36	M 8	65	9	6	1	4	72
GN 339-36-M8-65-KR-ST	36	M 8	65	9	6	0.5	4	65
GN 339-36-M10-45-KS-ST	36	M 10	45	9	6	1	5	78
GN 339-36-M10-45-KR-ST	36	M 10	45	9	6	0.5	5	70
GN 339-36-M10-70-KS-ST	36	M 10	70	9	6	1	5	91
GN 339-36-M10-70-KR-ST	36	M 10	70	9	6	0.5	5	83



STANDARD MACHINE ELEMENTS WORLDWIDE