



GN 339

Stainless Steel-Levelling elements

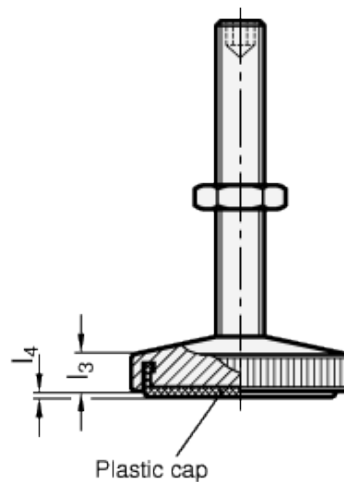

INOX
Stainless Steel

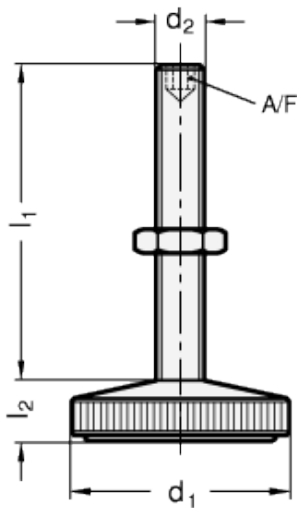

technical informations

Specification

Type

Type KS: with plastic cap, gliding

Type KR: with plastic cap, non-gliding

Stainless Steel NI

- AISI 303

- Hexagon nut ISO 4035, Stainless Steel AISI 304

Plastic caps:

- Type KS

Technopolymer (Polyacetal POM)

White (natural colour) RAL 9001

- Type KR

Elastomer (TPE)

73 shore A \approx

black

Hexagon nut ISO 4305

Steel zinc plated, blue passivated

Information

Levelling element GN 339 are used for applications in cases where no jointed link is required between foot and adjusting screw. For this reason they offer the advantage of reduced height. The gliding and/or the non-gliding protective cap is safely fixed in the foot.

Standard Elements	Main dimensions							Weight
Description	d ₁	d ₂	l ₁	l ₂	l ₃	l ₄	A/F	g
GN 339-29-M6-30-KS-NI	29	M 6	30	8	5	1	3	34
GN 339-29-M6-30-KR-NI	29	M 6	30	8	5	0.4	3	30
GN 339-29-M6-45-KS-NI	29	M 6	45	8	5	1	3	36
GN 339-29-M6-45-KR-NI	29	M 6	45	8	5	0.4	3	32
GN 339-29-M8-35-KS-NI	29	M 8	35	8	5	1	4	41
GN 339-29-M8-35-KR-NI	29	M 8	35	8	5	0.4	4	37
GN 339-29-M8-55-KS-NI	29	M 8	55	8	5	1	4	48
GN 339-29-M8-55-KR-NI	29	M 8	55	8	5	0.4	4	43
GN 339-36-M8-40-KS-NI	36	M 8	40	9	6	1	4	64
GN 339-36-M8-40-KR-NI	36	M 8	40	9	6	0.5	4	56
GN 339-36-M8-65-KS-NI	36	M 8	65	9	6	1	4	72
GN 339-36-M8-65-KR-NI	36	M 8	65	9	6	0.5	4	65
GN 339-36-M10-45-KS-NI	36	M 10	45	9	6	1	5	78
GN 339-36-M10-45-KR-NI	36	M 10	45	9	6	0.5	5	70
GN 339-36-M10-70-KS-NI	36	M 10	70	9	6	1	5	91
GN 339-36-M10-70-KR-NI	36	M 10	70	9	6	0.5	5	83



STANDARD MACHINE ELEMENTS WORLDWIDE