


GN 409.1

Positioning elements

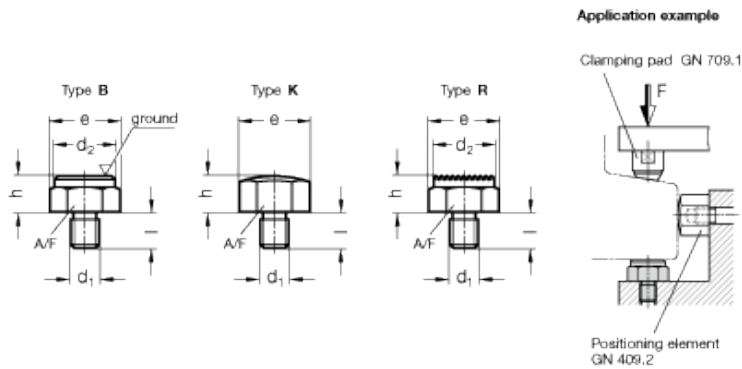

technical informations

Material

Black-oxide, hardened steel.

Standard executions available

- Version B: smooth contact face.
- Version K: spherical contact face.
- Version R: serrated contact face.

Features and applications

Positioning elements GN 409.1 with male thread are designed for use as locating plungers, stops and thrust blocks.

Standard Elements	Main dimensions					Width across corners	Weight
	Description	$h_{\pm 0.01}$	d_1	d_2	l		
GN 409.1-10-M8-B	10	M8	17	10	17	19.4	21
GN 409.1-10-M8-K	10	M8	-	10	17	19.4	20
GN 409.1-10-M8-R	10	M8	17	10	17	19.4	20
GN 409.1-10-M10-B	10	M10	19	12	19	21.9	28
GN 409.1-10-M10-K	10	M10	-	12	19	21.9	27
GN 409.1-10-M10-R	10	M10	19	12	19	21.9	26
GN 409.1-10-M12-B	10	M12	22	14	22	25.2	40
GN 409.1-10-M12-K	10	M12	-	14	22	25.2	37
GN 409.1-10-M12-R	10	M12	22	14	22	25.9	38
GN 409.1-15-M10-B	15	M10	19	12	19	21.9	40
GN 409.1-15-M10-K	15	M10	-	12	19	21.9	40
GN 409.1-15-M10-R	15	M10	19	12	19	21.9	39
GN 409.1-15-M12-B	15	M12	22	14	22	25.2	56
GN 409.1-15-M12-K	15	M12	-	14	22	25.2	54
GN 409.1-15-M12-R	15	M12	22	14	22	25.2	54
GN 409.1-15-M16-B	15	M16	30	19	30	33	110
GN 409.1-15-M16-K	15	M16	-	19	30	33	105
GN 409.1-15-M16-R	15	M16	30	19	30	33	106
GN 409.1-20-M16-B	20	M16	30	19	30	33	140
GN 409.1-20-M16-K	20	M16	-	19	30	33	135
GN 409.1-20-M16-R	20	M16	30	19	30	33	136



STANDARD MACHINE ELEMENTS WORLDWIDE