



# GN 409.2

Positioning elements

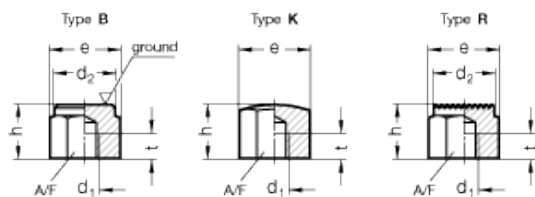

## Application example



## technical informations

### Material

Black-oxide, hardened steel.

### Standard executions available

- Type B: smooth contact face.
- Type K: spherical contact face.
- Type R: serrated contact face.

### Features and applications

Positioning elements GN 409.2 with female thread are designed for use as locating plungers, stops and thrust blocks.

Standard Elements	Main dimensions					Width across corners	Weight
Description	$h_{\pm 0.01}$	$d_1$	$d_2$	$t_{\min.}$	A/F	e	g
GN 409.2-15-M8-B	15	M8	17	6	17	19.4	25
GN 409.2-15-M8-K	15	M8	-	6	17	19.4	24
GN 409.2-15-M8-R	15	M8	17	6	17	19.4	24
GN 409.2-20-M10-B	20	M10	19	10	19	21.9	39
GN 409.2-20-M10-K	20	M10	-	10	17	21.9	38
GN 409.2-20-M10-R	20	M10	19	10	19	21.9	38
GN 409.2-20-M12-B	20	M12	22	10	22	25.2	52
GN 409.2-20-M12-K	20	M12	-	10	22	25.2	50
GN 409.2-20-M12-R	20	M12	22	10	22	25.2	50
GN 409.2-25-M8-B	25	M8	17	12	17	19.4	42
GN 409.2-25-M8-K	25	M8	-	12	17	19.4	41
GN 409.2-25-M8-R	25	M8	17	12	17	19.4	41
GN 409.2-25-M12-B	25	M12	22	15	22	25.2	55
GN 409.2-25-M12-K	25	M12	-	15	22	25.2	65
GN 409.2-25-M12-R	25	M12	22	15	22	25.2	63
GN 409.2-30-M10-B	30	M10	19	15	19	21.9	61
GN 409.2-30-M10-K	30	M10	-	15	19	21.9	61
GN 409.2-30-M10-R	30	M10	19	15	19	21.9	60
GN 409.2-30-M12-B	30	M12	22	18	22	25.2	79
GN 409.2-30-M12-K	30	M12	-	18	22	25.2	79
GN 409.2-30-M12-R	30	M12	22	18	22	25.2	77
GN 409.2-30-M16-B	30	M16	30	20	30	33	82
GN 409.2-30-M16-K	30	M16	-	20	30	33	82
GN 409.2-30-M16-R	30	M16	30	20	30	33	80
GN 409.2-40-M10-B	40	M10	19	15	19	21.9	85
GN 409.2-40-M10-K	40	M10	-	15	19	21.9	85
GN 409.2-40-M10-R	40	M10	19	15	19	21.9	84
GN 409.2-40-M12-B	40	M12	22	18	22	25.2	110
GN 409.2-40-M12-K	40	M12	-	18	22	25.2	110
GN 409.2-40-M12-R	40	M12	22	18	22	25.2	109
GN 409.2-50-M12-B	50	M12	22	18	22	25.2	142
GN 409.2-50-M12-K	50	M12	-	18	22	25.2	141
GN 409.2-50-M12-R	50	M12	22	18	22	25.2	141
GN 409.2-50-M16-B	50	M16	30	24	30	33	270
GN 409.2-50-M16-K	50	M16	-	24	30	33	250
GN 409.2-50-M16-R	50	M16	30	24	30	33	253