

## Stainless Steel-Levelling feet

without fixing lug

### SPECIFICATION

#### Types (Base plate)

- Type **BO**: without rubber pad, with 2 fixing bores
- Type **DO**: without rubber pad
- Type **D1**: rubber clipped on, black
- Type **D3**: rubber vulcanised, black

#### Version

- Version **S**: without nut, External hexagon at the bottom
- Version **SK**: with nut, External hexagon at the bottom
- Version **T**: without nut, Wrench flat at the bottom, "not dipping" version
- Version **TK**: with nut, Wrench flat at the bottom, "not dipping" version
- Version **U**: without nut, Hexagon socket at the top, Wrench flat at the bottom
- Version **UK**: with nut, Hexagon socket at the top, Wrench flat at the bottom
- Version **V**: without nut, External hexagon at the top, Wrench flat at the bottom
- Version **VK**: with nut, External hexagon at the top, Wrench flat at the bottom
- Version **W**: with adjustable sleeve, Wrench flat at the bottom
- Version **X**: with female thread, External hexagon

Base plate, blank ground  
Stainless Steel AISI 304

Threaded stem  
Stainless Steel AISI 303

Hexagon nut ISO 4032  
Stainless Steel AISI 304

Rubber cap, clipped on  
black, TPE (Santoprene®) 80 ≈ Shore A

Rubber underlay, vulcanised  
black, NBR (Perbunan®) 70 ± Shore A

### INFORMATION

Stainless Steel-Levelling feet GN 41 are easy and very reasonably priced foot design variants.  
They will be delivered mounted and are not removable.

### TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Elastomer characteristics (see page A32)



### LOAD RATING OF STAINLESS STEEL-LEVELLING FEET

#### Information


The static load bearing capacity given in the table rests on a test series in which the load has been applied perpendicular to the base plate (without rubber pad). For the values given in the table, the strain relief may result in minor deformations of the base plate.

Bending and buckling stress which often occurs in practice results in a lower load bearing capacity of the adjustment spindle and may have to be taken into account.

Also, the spindle strength is assumed to be  $\geq 500 \text{ N/mm}^2$ .

The details given on strength are nonbinding guide values without any liability. In general, they do not constitute a warranty of quality.

The user must determine from case to case if a product is suitable for the intended purpose or use. Environmental factors may influence the stated values.

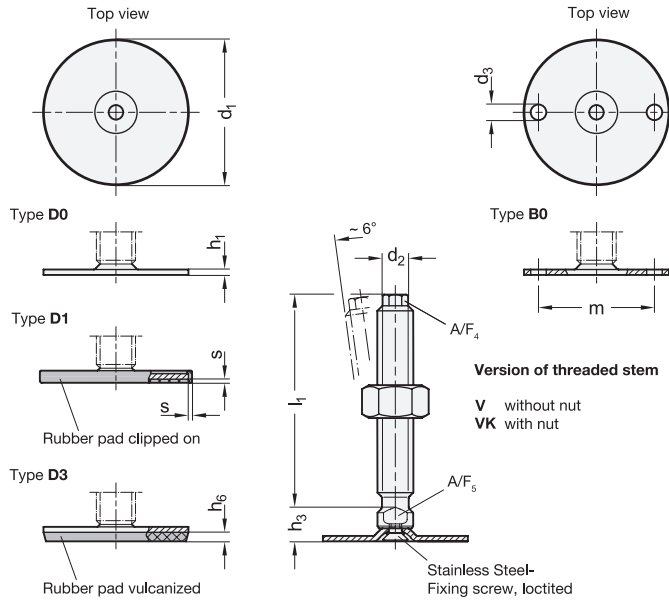

\* Complete with version of Levelling feet (External hexagon socket on the top/Wrench flat at the bottom)

V without nut  
VK with nut

GN 41-V/VK

STAINLESS STEEL

Description	d1	d2	l1	d3	m	h1	h3	h6	s4	s5	s6	A/FA/F4	A/FA/F5	Static load in kN	⚖️
GN 41-60-M16-75-B0-*	60	M16	75	6.6	48	2.5	14	-	-	10	12	16	76		
GN 41-60-M16-75-D0-*	60	M16	75	-	-	2.5	14	-	-	10	12	16	136		
GN 41-60-M16-75-D1-*	60	M16	75	-	-	2.5	14	-	2	10	12	16	138		
GN 41-60-M16-75-D3-*	60	M16	75	-	-	2.5	14	4.5	-	10	12	16	134		
GN 41-60-M16-100-B0-*	60	M16	100	6.6	48	2.5	14	-	-	10	12	16	187		
GN 41-60-M16-100-D0-*	60	M16	100	-	-	2.5	14	-	-	10	12	16	191		
GN 41-60-M16-100-D1-*	60	M16	100	-	-	2.5	14	-	2	10	12	16	195		
GN 41-60-M16-100-D3-*	60	M16	100	-	-	2.5	14	4.5	-	10	12	16	199		
GN 41-60-M16-125-B0-*	60	M16	125	6.6	48	2.5	14	-	-	10	12	16	219		
GN 41-60-M16-125-D0-*	60	M16	125	-	-	2.5	14	-	-	10	12	16	223		
GN 41-60-M16-125-D1-*	60	M16	125	-	-	2.5	14	-	2	10	12	16	227		
GN 41-60-M16-125-D3-*	60	M16	125	-	-	2.5	14	4.5	-	10	12	16	231		
GN 41-60-M16-150-B0-*	60	M16	150	6.6	48	2.5	14	-	-	10	12	16	252		
GN 41-60-M16-150-D0-*	60	M16	150	-	-	2.5	14	-	-	10	12	16	256		
GN 41-60-M16-150-D1-*	60	M16	150	-	-	2.5	14	-	2	10	12	16	260		
GN 41-60-M16-150-D3-*	60	M16	150	-	-	2.5	14	4.5	-	10	12	16	266		
GN 41-80-M16-75-B0-*	80	M16	75	8.5	48	3	15	-	-	10	12	20	109		
GN 41-80-M16-75-D0-*	80	M16	75	-	-	3	15	-	-	10	12	20	109		
GN 41-80-M16-75-D1-*	80	M16	75	-	-	3	15	-	2	10	12	20	114		
GN 41-80-M16-75-D3-*	80	M16	75	-	-	3	15	5	-	10	12	20	114		
GN 41-80-M16-100-B0-*	80	M16	100	8.5	64	3	15	-	-	10	12	20	150		
GN 41-80-M16-100-D0-*	80	M16	100	-	-	3	15	-	-	10	12	20	190		
GN 41-80-M16-100-D1-*	80	M16	100	-	-	3	15	-	2	10	12	20	265		
GN 41-80-M16-100-D3-*	80	M16	100	-	-	3	15	5	-	10	12	20	275		
GN 41-80-M16-125-B0-*	80	M16	125	8.5	64	3	15	-	-	10	12	20	284		
GN 41-80-M16-125-D0-*	80	M16	125	-	-	3	15	-	-	10	12	20	285		
GN 41-80-M16-125-D1-*	80	M16	125	-	-	3	15	-	2	10	12	20	297		
GN 41-80-M16-125-D3-*	80	M16	125	-	-	3	15	5	-	10	12	20	307		
GN 41-80-M16-150-B0-*	80	M16	150	8.5	64	3	15	-	-	10	12	20	317		
GN 41-80-M16-150-D0-*	80	M16	150	-	-	3	15	-	-	10	12	20	319		
GN 41-80-M16-150-D1-*	80	M16	150	-	-	3	15	-	2	10	12	20	330		
GN 41-80-M16-150-D3-*	80	M16	150	-	-	3	15	5	-	10	12	20	340		

GN 41-V/VK

STAINLESS STEEL


Description	d1	d2	l1	d3	m	h1	h3	h6	s4	s5	s6	A/FA/F4	A/FA/F5	Static load in kN	⚖️
GN 41-80-M20-100-B0-*	80	M20	100	8.5	64	3	15	-	-	13	16	20	331		
GN 41-80-M20-100-D0-*	80	M20	100	-	-	3	15	-	-	13	16	20	331		
GN 41-80-M20-100-D1-*	80	M20	100	-	-	3	15	-	2	13	16	20	345		
GN 41-80-M20-100-D3-*	80	M20	100	-	-	3	15	5	-	13	16	20	355		
GN 41-80-M20-125-B0-*	80	M20	125	8.5	64	3	15	-	-	13	16	20	382		
GN 41-80-M20-125-D0-*	80	M20	125	-	-	3	15	-	-	13	16	20	382		
GN 41-80-M20-125-D1-*	80	M20	125	-	-	3	15	-	2	13	16	20	396		
GN 41-80-M20-125-D3-*	80	M20	125	-	-	3	15	5	-	13	16	20	406		
GN 41-80-M20-150-B0-*	80	M20	150	8.5	64	3	15	-	-	13	16	20	434		
GN 41-80-M20-150-D0-*	80	M20	150	-	-	3	15	-	-	13	16	20	434		
GN 41-80-M20-150-D1-*	80	M20	150	-	-	3	15	-	2	13	16	20	448		
GN 41-80-M20-150-D3-*	80	M20	150	-	-	3	15	5	-	13	16	20	458		
GN 41-80-M20-200-B0-*	80	M20	200	8.5	64	3	15	-	-	13	16	20	539		
GN 41-80-M20-200-D0-*	80	M20	200	-	-	3	15	-	-	13	16	20	539		
GN 41-80-M20-200-D1-*	80	M20	200	-	-	3	15	-	2	13	16	20	553		
GN 41-80-M20-200-D3-*	80	M20	200	-	-	3	15	5	-	13	16	20	563		
GN 41-80-M24-100-B0-*	80	M24	100	8.5	64	3	18	-	-	17	20	22	434		
GN 41-80-M24-100-D0-*	80	M24	100	-	-	3	18	-	-	17	20	22	436		
GN 41-80-M24-100-D1-*	80	M24	100	-	-	3	18	-	2	17	20	22	447		
GN 41-80-M24-100-D3-*	80	M24	100	-	-	3	18	5	-	17	20	22	460		
GN 41-80-M24-150-B0-*	80	M24	150	8.5	64	3	18	-	-	17	20	22	582		
GN 41-80-M24-150-D0-*	80	M24	150	-	-	3	18	-	-	17	20	22	583		
GN 41-80-M24-150-D1-*	80	M24	150	-	-	3	18	-	2	17	20	22	595		
GN 41-80-M24-150-D3-*	80	M24	150	-	-	3	18	5	-	17	20	22	608		
GN 41-80-M24-200-B0-*	80	M24	200	8.5	64	3	18	-	-	17	20	22	728		
GN 41-80-M24-200-D0-*	80	M24	200	-	-	3	18	-	-	17	20	22	729		
GN 41-80-M24-200-D1-*	80	M24	200	-	-	3	18	-	2	17	20	22	741		
GN 41-80-M24-200-D3-*	80	M24	200	-	-	3	18	5	-	17	20	22	754		

Weight Version V





Levelling elements 11

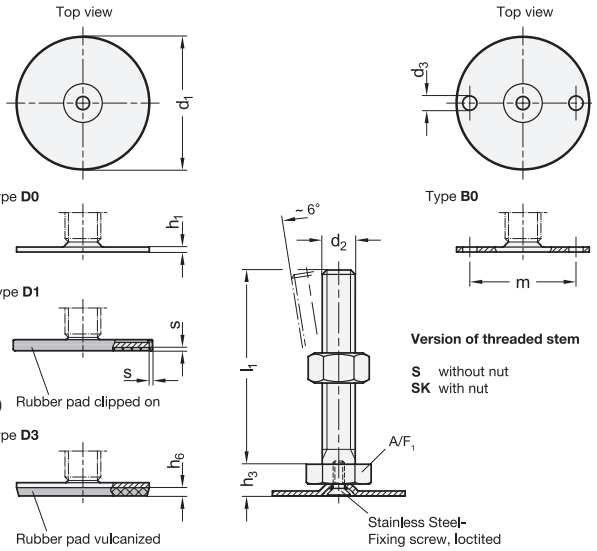

\* Complete with version of the Levelling feet (External hexagon at the bottom)

**S** without nut  
**SK** with nut

**GN 41-S/SK**

**STAINLESS STEEL**

Description	d1	d2	l1	d3	m	h1	h3	h6	s	A/F <sub>1</sub> Static load in kN	⚖️	
GN 41-40-M8-40-B0-*	40	M 8	40	5.4	30	2	11	-	-	17	8	38
GN 41-40-M8-40-D0-*	40	M 8	40	-	-	2	11	-	-	17	8	48
GN 41-40-M8-40-D1-*	40	M 8	40	-	-	2	11	-	1.5	17	8	50
GN 41-40-M8-40-D3-*	40	M 8	40	-	-	2	11	3.5	-	17	8	50
GN 41-40-M8-50-B0-*	40	M 8	50	5.4	30	2	11	-	-	17	8	50
GN 41-40-M8-50-D0-*	40	M 8	50	-	-	2	11	-	-	17	8	50
GN 41-40-M8-50-D1-*	40	M 8	50	-	-	2	11	-	1.5	17	8	55
GN 41-40-M8-50-D3-*	40	M 8	50	-	-	2	11	3.5	-	17	8	53
GN 41-40-M8-63-B0-*	40	M 8	63	5.4	30	2	11	-	-	17	8	55
GN 41-40-M8-63-D0-*	40	M 8	63	-	-	2	11	-	-	17	8	55
GN 41-40-M8-63-D1-*	40	M 8	63	-	-	2	11	-	1.5	17	8	60
GN 41-40-M8-63-D3-*	40	M 8	63	-	-	2	11	3.5	-	17	8	60
GN 41-40-M10-50-B0-*	40	M 10	50	5.4	30	2	11	-	-	17	12	64
GN 41-40-M10-50-D0-*	40	M 10	50	-	-	2	11	-	-	17	12	65
GN 41-40-M10-50-D1-*	40	M 10	50	-	-	2	11	-	1.5	17	12	60
GN 41-40-M10-50-D3-*	40	M 10	50	-	-	2	11	3.5	-	17	12	60
GN 41-40-M10-60-B0-*	40	M 10	60	5.4	30	2	11	-	-	17	12	68
GN 41-40-M10-60-D0-*	40	M 10	60	-	-	2	11	-	-	17	12	68
GN 41-40-M10-60-D1-*	40	M 10	60	-	-	2	11	-	1.5	17	12	75
GN 41-40-M10-60-D3-*	40	M 10	60	-	-	2	11	3.5	-	17	12	80
GN 41-40-M10-80-B0-*	40	M 10	80	5.4	30	2	11	-	-	17	12	80
GN 41-40-M10-80-D0-*	40	M 10	80	-	-	2	11	-	-	17	12	81
GN 41-40-M10-80-D1-*	40	M 10	80	-	-	2	11	-	1.5	17	12	82
GN 41-40-M10-80-D3-*	40	M 10	80	-	-	2	11	3.5	-	17	12	84
GN 41-40-M10-100-B0-*	40	M 10	100	5.4	30	2	11	-	-	17	12	90
GN 41-40-M10-100-D0-*	40	M 10	100	-	-	2	11	-	-	17	12	91
GN 41-40-M10-100-D1-*	40	M 10	100	-	-	2	11	-	1.5	17	12	92
GN 41-40-M10-100-D3-*	40	M 10	100	-	-	2	11	3.5	-	17	12	94
GN 41-40-M12-60-B0-*	40	M 12	60	5.4	30	2	11	-	-	17	12	90
GN 41-40-M12-60-D0-*	40	M 12	60	-	-	2	11	-	-	17	12	96
GN 41-40-M12-60-D1-*	40	M 12	60	-	-	2	11	-	1.5	17	12	100
GN 41-40-M12-60-D3-*	40	M 12	60	-	-	2	11	3.5	-	17	12	102
GN 41-40-M12-80-B0-*	40	M 12	80	5.4	30	2	11	-	-	17	12	102
GN 41-40-M12-80-D0-*	40	M 12	80	-	-	2	11	-	-	17	12	102
GN 41-40-M12-80-D1-*	40	M 12	80	-	-	2	11	-	1.5	17	12	103
GN 41-40-M12-80-D3-*	40	M 12	80	-	-	2	11	3.5	-	17	12	104
GN 41-40-M12-100-B0-*	40	M 12	100	5.4	30	2	11	-	-	17	12	118
GN 41-40-M12-100-D0-*	40	M 12	100	-	-	2	11	-	-	17	12	126
GN 41-40-M12-100-D1-*	40	M 12	100	-	-	2	11	-	1.5	17	12	120
GN 41-40-M12-100-D3-*	40	M 12	100	-	-	2	11	3.5	-	17	12	122
GN 41-40-M12-125-B0-*	40	M 12	125	5.4	30	2	11	-	-	17	12	135

**GN 41-S/SK**

**STAINLESS STEEL**

Description	d1	d2	l1	d3	m	h1	h3	h6	s	A/F <sub>1</sub> Static load in kN	⚖️	
GN 41-40-M12-125-D0-*	40	M 12	125	-	-	2	11	-	-	17	12	136
GN 41-40-M12-125-D1-*	40	M 12	125	-	-	2	11	-	1.5	17	12	139
GN 41-40-M12-125-D3-*	40	M 12	125	-	-	2	11	3.5	-	17	12	140
GN 41-50-M8-40-B0-*	50	M 8	40	6.6	38	2.5	11	-	-	17	8	60
GN 41-50-M8-40-D0-*	50	M 8	40	-	-	2.5	11	-	-	17	8	60
GN 41-50-M8-40-D1-*	50	M 8	40	-	-	2.5	11	-	2	17	8	74
GN 41-50-M8-40-D3-*	50	M 8	40	-	-	2.5	11	4	-	17	8	80
GN 41-50-M8-50-B0-*	50	M 8	50	6.6	38	2.5	11	-	-	17	8	60
GN 41-50-M8-50-D0-*	50	M 8	50	-	-	2.5	11	-	-	17	8	60
GN 41-50-M8-50-D1-*	50	M 8	50	-	-	2.5	11	-	2	17	8	80
GN 41-50-M8-50-D3-*	50	M 8	50	-	-	2.5	11	4	-	17	8	80
GN 41-50-M8-63-B0-*	50	M 8	63	6.6	38	2.5	11	-	-	17	8	65
GN 41-50-M8-63-D0-*	50	M 8	63	-	-	2.5	11	-	-	17	8	73
GN 41-50-M8-63-D1-*	50	M 8	63	-	-	2.5	11	-	2	17	8	79
GN 41-50-M8-63-D3-*	50	M 8	63	-	-	2.5	11	4	-	17	8	82
GN 41-50-M10-50-B0-*	50	M 10	50	6.6	38	2.5	11	-	-	17	14	80
GN 41-50-M10-50-D0-*	50	M 10	50	-	-	2.5	11	-	-	17	14	82
GN 41-50-M10-50-D1-*	50	M 10	50	-	-	2.5	11	-	2	17	14	90
GN 41-50-M10-50-D3-*	50	M 10	50	-	-	2.5	11	4	-	17	14	90
GN 41-50-M10-60-B0-*	50	M 10	60	6.6	38	2.5	11	-	-	17	14	90
GN 41-50-M10-60-D0-*	50	M 10	60	-	-	2.5	11	-	-	17	14	94
GN 41-50-M10-60-D1-*	50	M 10	60	-	-	2.5	11	-	2	17	14	98
GN 41-50-M10-60-D3-*	50	M 10	60	-	-	2.5	11	4	-	17	14	100
GN 41-50-M10-80-B0-*	50	M 10	80	6.6	38	2.5	11	-	-	17	14	100
GN 41-50-M10-80-D0-*	50	M 10	80	-	-	2.5	11	-	-	17	14	100
GN 41-50-M10-80-D1-*	50	M 10	80	-	-	2.5	11	-	2	17	14	104
GN 41-50-M10-80-D3-*	50	M 10	80	-	-	2.5	11	4	-	17	14	109
GN 41-50-M10-100-B0-*	50	M 10	100	6.6	38	2.5	11	-	-	17	14	110
GN 41-50-M10-100-D0-*	50	M 10	100	-	-	2.5	11	-	-	17	14	110
GN 41-50-M10-100-D1-*	50	M 10	100	-	-	2.5	11	-	2	17	14	120
GN 41-50-M10-100-D3-*	50	M 10	100	-	-	2.5	11	4	-	17	14	120
GN 41-50-M12-60-B0-*	50	M 12	60	6.6	38	2.5	11	-	-	17	14	108
GN 41-50-M12-60-D0-*	50	M 12	60	-	-	2.5	11	-	-	17	14	109
GN 41-50-M12-60-D1-*	50	M 12	60	-	-	2.5	11	-	2	17	14	110
GN 41-50-M12-60-D3-*	50	M 12	60	-	-	2.5	11	4	-	17	14	117

Weight Version S

\* Complete with version of the Levelling feet (External hexagon at the bottom)

S without nut  
SK with nut

GN 41-S/SK

STAINLESS STEEL

Description	d1	d2	l1	d3	m	h1	h3	h6	s	A/F <sub>1</sub>	Static load in kN	
GN 41-50-M12-80-B0-*	50	M12	80	6.6	38	2.5	11	-	-	17	14	120
GN 41-50-M12-80-D0-*	50	M12	80	-	-	2.5	11	-	-	17	14	120
GN 41-50-M12-80-D1-*	50	M12	80	-	-	2.5	11	-	2	17	14	129
GN 41-50-M12-80-D3-*	50	M12	80	-	-	2.5	11	4	-	17	14	120
GN 41-50-M12-100-B0-*	50	M12	100	6.6	38	2.5	11	-	-	17	14	137
GN 41-50-M12-100-D0-*	50	M12	100	-	-	2.5	11	-	-	17	14	137
GN 41-50-M12-100-D1-*	50	M12	100	-	-	2.5	11	-	2	17	14	145
GN 41-50-M12-100-D3-*	50	M12	100	-	-	2.5	11	4	-	17	14	145
GN 41-50-M12-125-B0-*	50	M12	125	6.6	38	2.5	11	-	-	17	14	154
GN 41-50-M12-125-D0-*	50	M12	125	-	-	2.5	11	-	-	17	14	155
GN 41-50-M12-125-D1-*	50	M12	125	-	-	2.5	11	-	2	17	14	160
GN 41-50-M12-125-D3-*	50	M12	125	-	-	2.5	11	4	-	17	14	165
GN 41-60-M8-40-B0-*	60	M8	40	6.6	48	2.5	11	-	-	17	8	74
GN 41-60-M8-40-D0-*	60	M8	40	-	-	2.5	11	-	-	17	8	80
GN 41-60-M8-40-D1-*	60	M8	40	-	-	2.5	11	-	2	17	8	88
GN 41-60-M8-40-D3-*	60	M8	40	-	-	2.5	11	4.5	-	17	8	100
GN 41-60-M8-50-B0-*	60	M8	50	6.6	48	2.5	11	-	-	17	8	78
GN 41-60-M8-50-D0-*	60	M8	50	-	-	2.5	11	-	-	17	8	80
GN 41-60-M8-50-D1-*	60	M8	50	-	-	2.5	11	-	2	17	8	90
GN 41-60-M8-50-D3-*	60	M8	50	-	-	2.5	11	4.5	-	17	8	100
GN 41-60-M8-63-B0-*	60	M8	63	6.6	48	2.5	11	-	-	17	8	82
GN 41-60-M8-63-D0-*	60	M8	63	-	-	2.5	11	-	-	17	8	100
GN 41-60-M8-63-D1-*	60	M8	63	-	-	2.5	11	-	2	17	8	100
GN 41-60-M8-63-D3-*	60	M8	63	-	-	2.5	11	4.5	-	17	8	100
GN 41-60-M10-50-B0-*	60	M10	50	6.6	48	2.5	11	-	-	17	14	107
GN 41-60-M10-50-D0-*	60	M10	50	-	-	2.5	11	-	-	17	14	110
GN 41-60-M10-50-D1-*	60	M10	50	-	-	2.5	11	-	2	17	14	110
GN 41-60-M10-50-D3-*	60	M10	50	-	-	2.5	11	4.5	-	17	14	114
GN 41-60-M10-60-B0-*	60	M10	60	6.6	48	2.5	11	-	-	17	14	111
GN 41-60-M10-60-D0-*	60	M10	60	-	-	2.5	11	-	-	17	14	107
GN 41-60-M10-60-D1-*	60	M10	60	-	-	2.5	11	-	2	17	14	120
GN 41-60-M10-60-D3-*	60	M10	60	-	-	2.5	11	4.5	-	17	14	119
GN 41-60-M10-80-B0-*	60	M10	80	6.6	48	2.5	11	-	-	17	14	121
GN 41-60-M10-80-D0-*	60	M10	80	-	-	2.5	11	-	-	17	14	118
GN 41-60-M10-80-D1-*	60	M10	80	-	-	2.5	11	-	2	17	14	120
GN 41-60-M10-80-D3-*	60	M10	80	-	-	2.5	11	4.5	-	17	14	140
GN 41-60-M10-100-B0-*	60	M10	100	6.6	48	2.5	11	-	-	17	14	120
GN 41-60-M10-100-D0-*	60	M10	100	-	-	2.5	11	-	-	17	14	128
GN 41-60-M10-100-D1-*	60	M10	100	-	-	2.5	11	-	2	17	14	138
GN 41-60-M10-100-D3-*	60	M10	100	-	-	2.5	11	4.5	-	17	14	140
GN 41-60-M12-60-B0-*	60	M12	60	6.6	48	2.5	11	-	-	17	16	125
GN 41-60-M12-60-D0-*	60	M12	60	-	-	2.5	11	-	-	17	16	126
GN 41-60-M12-60-D1-*	60	M12	60	-	-	2.5	11	-	2	17	16	133
GN 41-60-M12-60-D3-*	60	M12	60	-	-	2.5	11	4.5	-	17	16	139
GN 41-60-M12-80-B0-*	60	M12	80	6.6	48	2.5	11	-	-	17	16	139
GN 41-60-M12-80-D0-*	60	M12	80	-	-	2.5	11	-	-	17	16	140
GN 41-60-M12-80-D1-*	60	M12	80	-	-	2.5	11	-	2	17	16	148
GN 41-60-M12-80-D3-*	60	M12	80	-	-	2.5	11	4.5	-	17	16	131
GN 41-60-M12-100-B0-*	60	M12	100	6.6	48	2.5	11	-	-	17	16	150
GN 41-60-M12-100-D0-*	60	M12	100	-	-	2.5	11	-	-	17	16	153
GN 41-60-M12-100-D1-*	60	M12	100	-	-	2.5	11	-	2	17	16	155
GN 41-60-M12-100-D3-*	60	M12	100	-	-	2.5	11	4.5	-	17	16	160
GN 41-60-M12-125-B0-*	60	M12	125	6.6	48	2.5	11	-	-	17	16	171
GN 41-60-M12-125-D0-*	60	M12	125	-	-	2.5	11	-	-	17	16	172
GN 41-60-M12-125-D1-*	60	M12	125	-	-	2.5	11	-	2	17	16	180
GN 41-60-M12-125-D3-*	60	M12	125	-	-	2.5	11	4.5	-	17	16	186

GN 41-S/SK


STAINLESS STEEL

Description	d1	d2	l1	d3	m	h1	h3	h6	s	A/F <sub>1</sub>	Static load in kN	
GN 41-80-M8-40-B0-*	80	M8	40	8.5	64	3	12	-	-	17	8	138
GN 41-80-M8-40-D0-*	80	M8	40	-	-	3	12	-	-	17	8	142
GN 41-80-M8-40-D1-*	80	M8	40	-	-	3	12	-	2	17	8	160
GN 41-80-M8-40-D3-*	80	M8	40	-	-	3	12	5	-	17	8	180
GN 41-80-M8-50-B0-*	80	M8	50	8.5	64	3	12	-	-	17	8	150
GN 41-80-M8-50-D0-*	80	M8	50	-	-	3	12	-	-	17	8	160
GN 41-80-M8-50-D1-*	80	M8	50	-	-	3	12	-	2	17	8	160
GN 41-80-M8-50-D3-*	80	M8	50	-	-	3	12	5	-	17	8	150
GN 41-80-M8-63-B0-*	80	M8	63	8.5	64	3	12	-	-	17	8	146
GN 41-80-M8-63-D0-*	80	M8	63	-	-	3	12	-	-	17	8	149
GN 41-80-M8-63-D1-*	80	M8	63	-	-	3	12	-	2	17	8	159
GN 41-80-M8-63-D3-*	80	M8	63	-	-	3	12	5	-	17	8	180
GN 41-80-M10-50-B0-*	80	M10	50	8.5	64	3	12	-	-	17	14	151
GN 41-80-M10-50-D0-*	80	M10	50	-	-	3	12	-	-	17	14	157
GN 41-80-M10-50-D1-*	80	M10	50	-	-	3	12	-	2	17	14	180
GN 41-80-M10-50-D3-*	80	M10	50	-	-	3	12	5	-	17	14	180
GN 41-80-M10-60-B0-*	80	M10	60	8.5	64	3	12	-	-	17	14	175
GN 41-80-M10-60-D0-*	80	M10	60	-	-	3	12	-	-	17	14	175
GN 41-80-M10-60-D1-*	80	M10	60	-	-	3	12	-	2	17	14	174
GN 41-80-M10-60-D3-*	80	M10	60	-	-	3	12	5	-	17	14	196
GN 41-80-M10-80-B0-*	80	M10	80	8.5	64	3	12	-	-	17	14	185
GN 41-80-M10-80-D0-*	80	M10	80	-	-	3	12	-	-	17	14	185
GN 41-80-M10-80-D1-*	80	M10	80	-	-	3	12	-	2	17	14	198
GN 41-80-M10-80-D3-*	80	M10	80	-	-	3	12	5	-	17	14	211
GN 41-80-M10-100-B0-*	80	M10	100	8.5	64	3	12	-	-	17	14	196
GN 41-80-M10-100-D0-*	80	M10	100	-	-	3	12	-	-	17	14	186
GN 41-80-M10-100-D1-*	80	M10	100	-	-	3	12	-	2	17	14	210
GN 41-80-M10-100-D3-*	80	M10	100	-	-	3	12	5	-	17	14	216
GN 41-80-M12-60-B0-*	80	M12	60	8.5	64	3	12	-	-	17	20	150
GN 41-80-M12-60-D0-*	80	M12	60	-	-	3	12	-	-	17	20	196
GN 41-80-M12-60-D1-*	80	M12	60	-	-	3	12	-	2	17	20	200
GN 41-80-M12-60-D3-*	80	M12	60	-	-	3	12	5	-	17	20	214
GN 41-80-M12-80-B0-*	80	M12	80	8.5	64	3	12	-	-	17	20	203
GN 41-80-M12-80-D0-*	80	M12	80	-	-	3	12	-	-	17	20	204
GN 41-80-M12-80-D1-*	80	M12	80	-	-	3	12	-	2	17	20	218
GN 41-80-M12-80-D3-*	80	M12	80	-	-	3	12	5	-	17	20	220
GN 41-80-M12-100-B0-*	80	M12	100	8.5	64	3	12	-	-	17	20	218
GN 41-80-M12-100-D0-*	80	M12	100	-	-	3	12	-	-	17	20	214
GN 41-80-M12-100-D1-*	80	M12	100	-	-	3	12	-	2	17	20	228
GN 41-80-M12-100-D3-*	80	M12	100	-	-	3	12	5	-	17	20	245
GN 41-80-M12-125-B0-*	80	M12	125	8.5	64	3	12	-	-	17	20	235
GN 41-80-M12-125-D0-*	80	M12	125	-	-	3	12	-	-	17	20	237
GN 41-80-M12-125-D1-*	80	M12	125	-	-	3	12	-	2	17	20	240
GN 41-80-M12-125-D3-*	80	M12	125	-	-	3	12	5	-	17	20	250

Weight Version S



Levelling elements 11

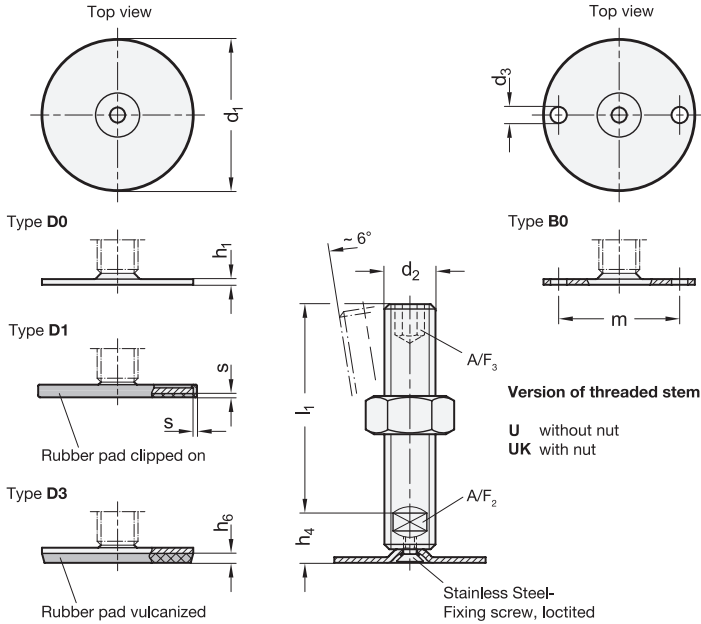

\* Complete with version of the Levelling feet (Hexagon socket at the top / Wrench at the bottom)

U without nut  
UK with nut

**GN 41-U/UK STAINLESS STEEL**


Description	d1	d2	l1	d3	m	h1	h4	h6	s	A/FA/F <sup>Static</sup>			load in kN
										2	3	3	
GN 41-40-M16-75-D0-*	40	M 16	75	-	-	2	17	-	-	12	8	12	153
GN 41-40-M16-75-D1-*	40	M 16	75	-	-	2	17	-	1.5	12	8	12	157
GN 41-40-M16-75-D3-*	40	M 16	75	-	-	2	17	3.5	-	12	8	12	158
GN 41-40-M16-100-D0-*	40	M 16	100	-	-	2	17	-	-	12	8	12	180
GN 41-40-M16-100-D1-*	40	M 16	100	-	-	2	17	-	1.5	12	8	12	202
GN 41-40-M16-100-D3-*	40	M 16	100	-	-	2	17	3.5	-	12	8	12	191
GN 41-40-M16-125-D0-*	40	M 16	125	-	-	2	17	-	-	12	8	12	189
GN 41-40-M16-125-D1-*	40	M 16	125	-	-	2	17	-	1.5	12	8	12	220
GN 41-40-M16-125-D3-*	40	M 16	125	-	-	2	17	3.5	-	12	8	12	256
GN 41-40-M16-150-D0-*	40	M 16	150	-	-	2	17	-	-	12	8	12	220
GN 41-40-M16-150-D1-*	40	M 16	150	-	-	2	17	-	1.5	12	8	12	266
GN 41-40-M16-150-D3-*	40	M 16	150	-	-	2	17	3.5	-	12	8	12	256
GN 41-40-M16-200-D0-*	40	M 16	200	-	-	2	17	-	-	12	8	12	322
GN 41-40-M16-200-D1-*	40	M 16	200	-	-	2	17	-	1.5	12	8	12	334
GN 41-40-M16-200-D3-*	40	M 16	200	-	-	2	17	3.5	-	12	8	12	336
GN 41-50-M16-75-B0-*	50	M 16	75	6.6	38	2.5	17	-	-	12	8	14	141
GN 41-50-M16-75-D0-*	50	M 16	75	-	-	2.5	17	-	-	12	8	14	174
GN 41-50-M16-75-D1-*	50	M 16	75	-	-	2.5	17	-	2	12	8	14	181
GN 41-50-M16-75-D3-*	50	M 16	75	-	-	2.5	17	4	-	12	8	14	184
GN 41-50-M16-100-B0-*	50	M 16	100	6.6	38	2.5	17	-	-	12	8	14	173
GN 41-50-M16-100-D0-*	50	M 16	100	-	-	2.5	17	-	-	12	8	14	209
GN 41-50-M16-100-D1-*	50	M 16	100	-	-	2.5	17	-	2	12	8	14	215
GN 41-50-M16-100-D3-*	50	M 16	100	-	-	2.5	17	4	-	12	8	14	277

**GN 41-U/UK STAINLESS STEEL**

Description	d1	d2	l1	d3	m	h1	h4	h6	s	A/FA/F <sup>Static</sup>			load in kN
										2	3	3	
GN 41-50-M16-125-D0-*	50	M 16	125	-	-	2.5	17	-	-	12	8	14	240
GN 41-50-M16-125-D1-*	50	M 16	125	-	-	2.5	17	-	2	12	8	14	248
GN 41-50-M16-125-D3-*	50	M 16	125	-	-	2.5	17	4	-	12	8	14	250
GN 41-50-M16-150-B0-*	50	M 16	150	6.6	38	2.5	17	-	-	12	8	14	238
GN 41-50-M16-150-D0-*	50	M 16	150	-	-	2.5	17	-	-	12	8	14	276
GN 41-50-M16-150-D1-*	50	M 16	150	-	-	2.5	17	-	2	12	8	14	280
GN 41-50-M16-150-D3-*	50	M 16	150	-	-	2.5	17	4	-	12	8	14	282
GN 41-50-M16-200-B0-*	50	M 16	200	6.6	38	2.5	17	-	-	12	8	14	304
GN 41-50-M16-200-D0-*	50	M 16	200	-	-	2.5	17	-	-	12	8	14	350
GN 41-50-M16-200-D1-*	50	M 16	200	-	-	2.5	17	-	2	12	8	14	345
GN 41-50-M16-200-D3-*	50	M 16	200	-	-	2.5	17	4	-	12	8	14	347
GN 41-60-M16-75-B0-*	60	M 16	75	6.6	48	2.5	17	-	-	12	8	16	150
GN 41-60-M16-75-D0-*	60	M 16	75	-	-	2.5	17	-	-	12	8	16	192
GN 41-60-M16-75-D1-*	60	M 16	75	-	-	2.5	17	-	2	12	8	16	200
GN 41-60-M16-75-D3-*	60	M 16	75	-	-	2.5	17	4.5	-	12	8	16	202
GN 41-60-M16-100-B0-*	60	M 16	100	6.6	48	2.5	17	-	-	12	8	16	189
GN 41-60-M16-100-D0-*	60	M 16	100	-	-	2.5	17	-	-	12	8	16	222
GN 41-60-M16-100-D1-*	60	M 16	100	-	-	2.5	17	-	2	12	8	16	232
GN 41-60-M16-100-D3-*	60	M 16	100	-	-	2.5	17	4.5	-	12	8	16	238
GN 41-60-M16-125-B0-*	60	M 16	125	6.6	48	2.5	17	-	-	12	8	16	222
GN 41-60-M16-125-D0-*	60	M 16	125	-	-	2.5	17	-	-	12	8	16	259
GN 41-60-M16-125-D1-*	60	M 16	125	-	-	2.5	17	-	2	12	8	16	260
GN 41-60-M16-125-D3-*	60	M 16	125	-	-	2.5	17	4.5	-	12	8	16	272

Weight Version U



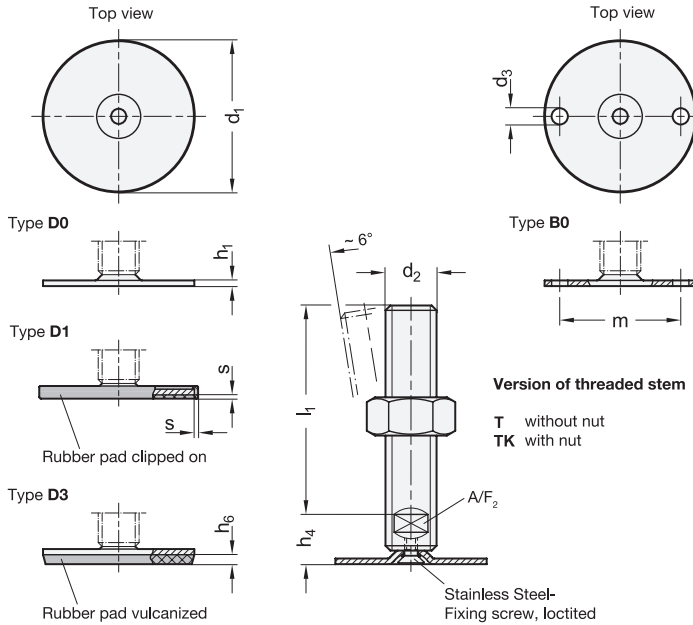

\* Complete with version of the Levelling feet (Wrench flat at the bottom)

T without nut  
TK with nut

GN 41-T/TK

STAINLESS STEEL

Description	d1	d2	l1	d3	m	h1	h4	h6	s	A/F <sub>2</sub>	Static load in kN	⚖️
GN 41-40-M16-75-D0-*	40	M 16	75	-	-	2	17	-	-	12	12	129
GN 41-40-M16-75-D1-*	40	M 16	75	-	-	2	17	-	1.5	12	12	132
GN 41-40-M16-75-D3-*	40	M 16	75	-	-	2	17	3.5	-	12	12	150
GN 41-40-M16-100-D0-*	40	M 16	100	-	-	2	17	-	-	12	12	171
GN 41-40-M16-100-D1-*	40	M 16	100	-	-	2	17	-	1.5	12	12	200
GN 41-40-M16-100-D3-*	40	M 16	100	-	-	2	17	3.5	-	12	12	174
GN 41-40-M16-125-D0-*	40	M 16	125	-	-	2	17	-	-	12	12	194
GN 41-40-M16-125-D1-*	40	M 16	125	-	-	2	17	-	1.5	12	12	197
GN 41-40-M16-125-D3-*	40	M 16	125	-	-	2	17	3.5	-	12	12	220
GN 41-40-M16-150-D0-*	40	M 16	150	-	-	2	17	-	-	12	12	226
GN 41-40-M16-150-D1-*	40	M 16	150	-	-	2	17	-	1.5	12	12	229
GN 41-40-M16-150-D3-*	40	M 16	150	-	-	2	17	3.5	-	12	12	238
GN 41-40-M16-200-D0-*	40	M 16	200	-	-	2	17	-	-	12	12	569
GN 41-40-M16-200-D1-*	40	M 16	200	-	-	2	17	-	1.5	12	12	572
GN 41-40-M16-200-D3-*	40	M 16	200	-	-	2	17	3.5	-	12	12	581
GN 41-50-M16-75-B0-*	50	M 16	75	6.6	38	2.5	17	-	-	12	14	146
GN 41-50-M16-75-D0-*	50	M 16	75	-	-	2.5	17	-	-	12	14	149
GN 41-50-M16-75-D1-*	50	M 16	75	-	-	2.5	17	-	2	12	14	155
GN 41-50-M16-75-D3-*	50	M 16	75	-	-	2.5	17	4	-	12	14	150
GN 41-50-M16-100-B0-*	50	M 16	100	6.6	38	2.5	17	-	-	12	14	179
GN 41-50-M16-100-D0-*	50	M 16	100	-	-	2.5	17	-	-	12	14	182
GN 41-50-M16-100-D1-*	50	M 16	100	-	-	2.5	17	-	2	12	14	188
GN 41-50-M16-100-D3-*	50	M 16	100	-	-	2.5	17	4	-	12	14	192

GN 41-T/TK


STAINLESS STEEL

Description	d1	d2	l1	d3	m	h1	h4	h6	s	A/F <sub>2</sub>	Static load in kN	⚖️
GN 41-50-M16-125-B0-*	50	M 16	125	6.6	38	2.5	17	-	-	12	14	211
GN 41-50-M16-125-D0-*	50	M 16	125	-	-	2.5	17	-	-	12	14	214
GN 41-50-M16-125-D1-*	50	M 16	125	-	-	2.5	17	-	2	12	14	220
GN 41-50-M16-125-D3-*	50	M 16	125	-	-	2.5	17	4	-	12	14	225
GN 41-50-M16-150-B0-*	50	M 16	150	6.6	38	2.5	17	-	-	12	14	243
GN 41-50-M16-150-D0-*	50	M 16	150	-	-	2.5	17	-	-	12	14	246
GN 41-50-M16-150-D1-*	50	M 16	150	-	-	2.5	17	-	2	12	14	256
GN 41-50-M16-150-D3-*	50	M 16	150	-	-	2.5	17	4	-	12	14	260
GN 41-50-M16-200-B0-*	50	M 16	200	6.6	38	2.5	17	-	-	12	14	286
GN 41-50-M16-200-D0-*	50	M 16	200	-	-	2.5	17	-	-	12	14	300
GN 41-50-M16-200-D1-*	50	M 16	200	-	-	2.5	17	-	2	12	14	320
GN 41-50-M16-200-D3-*	50	M 16	200	-	-	2.5	17	4	-	12	14	324
GN 41-60-M16-75-B0-*	60	M 16	75	6.6	48	2.5	17	-	-	12	16	162
GN 41-60-M16-75-D0-*	60	M 16	75	-	-	2.5	17	-	-	12	16	166
GN 41-60-M16-75-D1-*	60	M 16	75	-	-	2.5	17	-	2	12	16	170
GN 41-60-M16-75-D3-*	60	M 16	75	-	-	2.5	17	4.5	-	12	16	174
GN 41-60-M16-100-B0-*	60	M 16	100	6.6	48	2.5	17	-	-	12	16	195
GN 41-60-M16-100-D0-*	60	M 16	100	-	-	2.5	17	-	-	12	16	199
GN 41-60-M16-100-D1-*	60	M 16	100	-	-	2.5	17	-	2	12	16	207
GN 41-60-M16-100-D3-*	60	M 16	100	-	-	2.5	17	4.5	-	12	16	218
GN 41-60-M16-125-B0-*	60	M 16	125	6.6	48	2.5	17	-	-	12	16	227
GN 41-60-M16-125-D0-*	60	M 16	125	-	-	2.5	17	-	-	12	16	231
GN 41-60-M16-125-D1-*	60	M 16	125	-	-	2.5	17	-	2	12	16	239
GN 41-60-M16-125-D3-*	60	M 16	125	-	-	2.5	17	4.5	-	12	16	255

Weight Version T





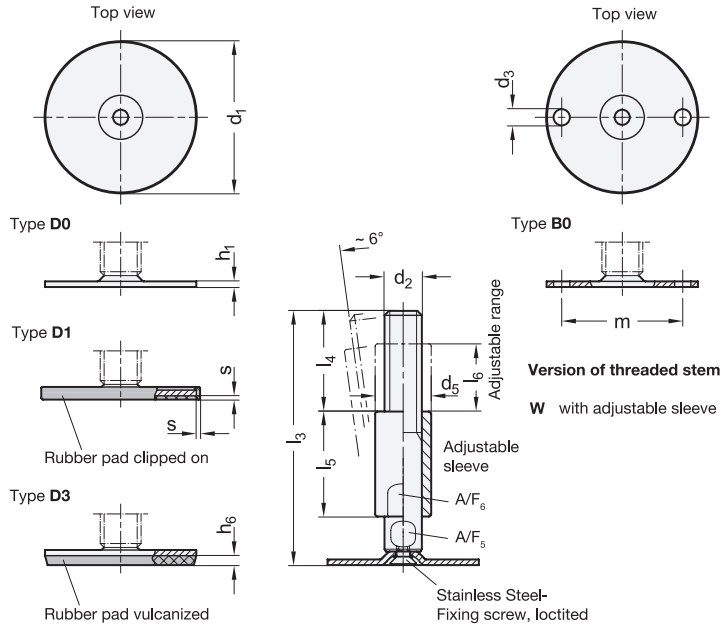

GN 41-W

STAINLESS STEEL

Description	d1	d2	l3	d3	d4	m	h1	h6	l4	l5	l6	s	A/F 5	A/F 6	Static load in kN	⚖️
GN 41-60-M16-110-B0-W	60	M 16	110	6.6	24	48	2.5	-	45	45	29	-	12	20	16	280
GN 41-60-M16-110-D0-W	60	M 16	110	-	24	-	2.5	-	45	45	29	-	12	20	16	284
GN 41-60-M16-110-D1-W	60	M 16	110	-	24	-	2.5	-	45	45	29	2	12	20	16	292
GN 41-60-M16-110-D3-W	60	M 16	110	-	24	-	2.5	4.5	45	45	29	-	12	20	16	300
GN 41-60-M16-135-B0-W	60	M 16	135	6.6	24	48	2.5	-	45	45	29	-	12	20	16	317
GN 41-60-M16-135-D0-W	60	M 16	135	-	24	-	2.5	-	45	45	29	-	12	20	16	321
GN 41-60-M16-135-D1-W	60	M 16	135	-	24	-	2.5	-	45	45	29	2	12	20	16	329
GN 41-60-M16-135-D3-W	60	M 16	135	-	24	-	2.5	4.5	45	45	29	-	12	20	16	335
GN 41-60-M16-160-B0-W	60	M 16	160	6.6	24	48	2.5	-	45	45	29	-	12	20	16	358
GN 41-60-M16-160-D0-W	60	M 16	160	-	24	-	2.5	-	45	45	29	-	12	20	16	362
GN 41-60-M16-160-D1-W	60	M 16	160	-	24	-	2.5	-	45	45	29	2	12	20	16	376
GN 41-60-M16-160-D3-W	60	M 16	160	-	24	-	2.5	4.5	45	45	29	-	12	20	16	366
GN 41-60-M16-185-B0-W	60	M 16	185	6.6	24	48	2.5	-	45	45	29	-	12	20	16	398
GN 41-60-M16-185-D0-W	60	M 16	185	-	24	-	2.5	-	45	45	29	-	12	20	16	402
GN 41-60-M16-185-D1-W	60	M 16	185	-	24	-	2.5	-	45	45	29	2	12	20	16	410
GN 41-60-M16-185-D3-W	60	M 16	185	-	24	-	2.5	4.5	45	45	29	-	12	20	16	418
GN 41-80-M16-110-B0-W	80	M 16	110	8.5	24	64	3	-	45	45	29	-	12	20	20	345
GN 41-80-M16-110-D0-W	80	M 16	110	-	24	-	3	-	45	45	29	-	12	20	20	350
GN 41-80-M16-110-D1-W	80	M 16	110	-	24	-	3	-	45	45	29	2	12	20	20	358
GN 41-80-M16-110-D3-W	80	M 16	110	-	24	-	3	5	45	45	29	-	12	20	20	364
GN 41-80-M16-135-B0-W	80	M 16	135	8.5	24	64	3	-	45	45	29	-	12	20	20	382
GN 41-80-M16-135-D0-W	80	M 16	135	-	24	-	3	-	45	45	29	-	12	20	20	387
GN 41-80-M16-135-D1-W	80	M 16	135	-	24	-	3	-	45	45	29	2	12	20	20	400
GN 41-80-M16-135-D3-W	80	M 16	135	-	24	-	3	5	45	45	29	-	12	20	20	405
GN 41-80-M16-160-B0-W	80	M 16	160	8.5	24	64	3	-	45	45	29	-	12	20	20	423
GN 41-80-M16-160-D0-W	80	M 16	160	-	24	-	3	-	45	45	29	-	12	20	20	430
GN 41-80-M16-160-D1-W	80	M 16	160	-	24	-	3	-	45	45	29	2	12	20	20	440
GN 41-80-M16-160-D3-W	80	M 16	160	-	24	-	3	5	45	45	29	-	12	20	20	446
GN 41-80-M16-185-B0-W	80	M 16	185	8.5	24	64	3	-	45	45	29	-	12	20	20	463

Levelling elements 11




11  
Levelling elements

GN 41-W

STAINLESS STEEL

Description	d1	d2	l3	d3	d4	m	h1	h6	l4	l5	l6	s	A/F 5	A/F 6	Static load in kN	
GN 41-80-M16-185-D0-W	80	M 16	185	-	24	-	3	-	45	45	29	-	12	20	20	469
GN 41-80-M16-185-D1-W	80	M 16	185	-	24	-	3	-	45	45	29	2	12	20	20	475
GN 41-80-M16-185-D3-W	80	M 16	185	-	24	-	3	5	45	45	29	-	12	20	20	486
GN 41-80-M20-134-B0-W	80	M 20	134	8.5	30	64	3	-	56	56	37	-	16	24	20	561
GN 41-80-M20-134-D0-W	80	M 20	134	-	30	-	3	-	56	56	37	-	16	24	20	561
GN 41-80-M20-134-D1-W	80	M 20	134	-	30	-	3	-	56	56	37	2	16	24	20	575
GN 41-80-M20-134-D3-W	80	M 20	134	-	30	-	3	5	56	56	37	-	16	24	20	580
GN 41-80-M20-159-B0-W	80	M 20	159	8.5	30	64	3	-	56	56	37	-	16	24	20	624
GN 41-80-M20-159-D0-W	80	M 20	159	-	30	-	3	-	56	56	37	-	16	24	20	624
GN 41-80-M20-159-D1-W	80	M 20	159	-	30	-	3	-	56	56	37	2	16	24	20	638
GN 41-80-M20-159-D3-W	80	M 20	159	-	30	-	3	5	56	56	37	-	16	24	20	645
GN 41-80-M20-184-B0-W	80	M 20	184	8.5	30	64	3	-	56	56	37	-	16	24	20	687
GN 41-80-M20-184-D0-W	80	M 20	184	-	30	-	3	-	56	56	37	-	16	24	20	687
GN 41-80-M20-184-D1-W	80	M 20	184	-	30	-	3	-	56	56	37	2	16	24	20	701
GN 41-80-M20-184-D3-W	80	M 20	184	-	30	-	3	5	56	56	37	-	16	24	20	710
GN 41-80-M20-234-B0-W	80	M 20	234	8.5	30	64	3	-	56	56	37	-	16	24	20	810
GN 41-80-M20-234-D0-W	80	M 20	234	-	30	-	3	-	56	56	37	-	16	24	20	811
GN 41-80-M20-234-D1-W	80	M 20	234	-	30	-	3	-	56	56	37	2	16	24	20	825
GN 41-80-M20-234-D3-W	80	M 20	234	-	30	-	3	5	56	56	37	-	16	24	20	840
GN 41-80-M24-159-B0-W	80	M 24	159	8.5	35	64	3	-	67	67	42	-	20	30	22	863
GN 41-80-M24-159-D0-W	80	M 24	159	-	35	-	3	-	67	67	42	-	20	30	22	870
GN 41-80-M24-159-D1-W	80	M 24	159	-	35	-	3	-	67	67	42	2	20	30	22	876
GN 41-80-M24-159-D3-W	80	M 24	159	-	35	-	3	5	67	67	42	-	20	30	22	889
GN 41-80-M24-209-B0-W	80	M 24	209	8.5	35	64	3	-	67	67	42	-	20	30	22	1041
GN 41-80-M24-209-D0-W	80	M 24	209	-	35	-	3	-	67	67	42	-	20	30	22	1045
GN 41-80-M24-209-D1-W	80	M 24	209	-	35	-	3	-	67	67	42	2	20	30	22	1054
GN 41-80-M24-209-D3-W	80	M 24	209	-	35	-	3	5	67	67	42	-	20	30	22	1067
GN 41-80-M24-259-B0-W	80	M 24	259	8.5	35	64	3	-	67	67	42	-	20	30	22	1220
GN 41-80-M24-259-D0-W	80	M 24	259	-	35	-	3	-	67	67	42	-	20	30	22	1225
GN 41-80-M24-259-D1-W	80	M 24	259	-	35	-	3	-	67	67	42	2	20	30	22	1233
GN 41-80-M24-259-D3-W	80	M 24	259	-	35	-	3	5	67	67	42	-	20	30	22	1246

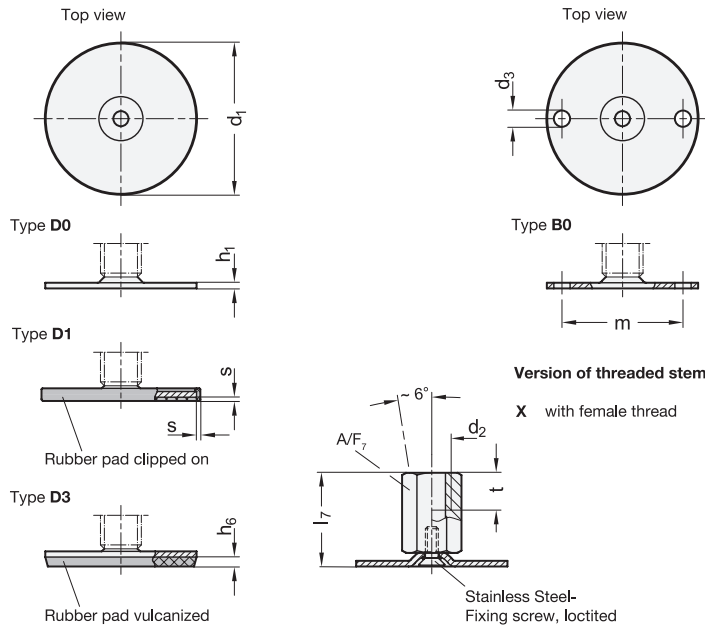

GN 41-X

STAINLESS STEEL

Description	d1	d2	l7	d3	m	h1	h6	s	A/F <sub>7</sub>	t	Static load in kN	
GN 41-40-M8-25-B0-X	40	M 8	25	5.4	30	2	-	-	14	8	40	
GN 41-40-M8-25-D0-X	40	M 8	25	-	-	2	-	-	14	8	40	
GN 41-40-M8-25-D1-X	40	M 8	25	-	2	-	1.5	14	8	8	41	
GN 41-40-M10-28-D3-X	40	M 8	25	-	2	3.5	-	-	14	8	47	
GN 41-40-M10-28-B0-X	40	M 10	28	5.4	30	2	-	-	14	10	12	40
GN 41-40-M10-28-D0-X	40	M 10	28	-	-	2	-	-	14	10	12	43
GN 41-40-M10-28-D1-X	40	M 10	28	-	2	-	1.5	14	10	12	47	
GN 41-40-M10-28-D3-X	40	M 10	28	-	2	3.5	-	-	14	10	12	47
GN 41-40-M12-31-B0-X	40	M 12	31	5.4	30	2	-	-	17	12	12	68
GN 41-40-M12-31-D0-X	40	M 12	31	-	-	2	-	-	17	12	12	69
GN 41-40-M12-31-D1-X	40	M 12	31	-	2	-	1.5	17	12	12	70	
GN 41-40-M12-31-D3-X	40	M 12	31	-	2	3.5	-	-	17	12	12	78
GN 41-40-M16-37-D0-X	40	M 16	37	-	-	2	-	-	22	16	12	100
GN 41-40-M16-37-D1-X	40	M 16	37	-	-	2	-	1.5	22	16	12	101
GN 41-40-M16-37-D3-X	40	M 16	37	-	-	2	3.5	-	22	16	12	102
GN 41-50-M8-25-B0-X	50	M 8	25	6.6	38	2.5	-	-	14	8	70	
GN 41-50-M8-25-D0-X	50	M 8	25	-	-	2.5	-	-	14	8	70	
GN 41-50-M8-25-D1-X	50	M 8	25	-	2.5	-	2	14	8	8	75	
GN 41-50-M8-25-D3-X	50	M 8	25	-	2.5	4	-	-	14	8	75	
GN 41-50-M10-28-B0-X	50	M 10	28	6.6	38	2.5	-	-	14	10	14	79
GN 41-50-M10-28-D0-X	50	M 10	28	-	-	2.5	-	-	14	10	14	79
GN 41-50-M10-28-D1-X	50	M 10	28	-	2.5	-	2	14	10	14	73	
GN 41-50-M10-28-D3-X	50	M 10	28	-	2.5	4	-	-	14	10	14	74
GN 41-50-M12-32-B0-X	50	M 12	32	6.6	38	2.5	-	-	17	12	14	81
GN 41-50-M12-32-D0-X	50	M 12	32	-	2.5	-	-	-	17	12	14	84
GN 41-50-M12-32-D1-X	50	M 12	32	-	2.5	-	2	17	12	14	80	
GN 41-50-M12-32-D3-X	50	M 12	32	-	2.5	4	-	-	17	12	14	90
GN 41-50-M16-37-B0-X	50	M 16	37	6.6	38	2.5	-	-	22	16	14	110
GN 41-50-M16-37-D0-X	50	M 16	37	-	2.5	-	-	-	22	16	14	120
GN 41-50-M16-37-D1-X	50	M 16	37	-	2.5	-	2	22	16	14	120	
GN 41-50-M16-37-D3-X	50	M 16	37	-	2.5	4	-	-	22	16	14	130
GN 41-60-M8-25-B0-X	60	M 8	25	6.6	48	2.5	-	-	14	8	8	90
GN 41-60-M8-25-D0-X	60	M 8	25	-	-	2.5	-	-	14	8	8	90

GN 41-X

STAINLESS STEEL

Description	d1	d2	l7	d3	m	h1	h6	s	A/F <sub>7</sub>	t	Static load in kN	
GN 41-60-M8-25-D1-X	60	M 8	25	-	-	2.5	-	2	14	8	8	90
GN 41-60-M8-25-D3-X	60	M 8	25	-	-	2.5	4.5	-	14	8	8	95
GN 41-60-M10-28-B0-X	60	M 10	28	6.6	48	2.5	-	-	14	10	14	96
GN 41-60-M10-28-D0-X	60	M 10	28	-	-	2.5	-	-	14	10	14	79
GN 41-60-M10-28-D1-X	60	M 10	28	-	-	2.5	-	2	14	10	14	88
GN 41-60-M10-28-D3-X	60	M 10	28	-	-	2.5	4.5	-	14	10	14	100
GN 41-60-M12-32-B0-X	60	M 12	32	6.6	48	2.5	-	-	17	12	16	111
GN 41-60-M12-32-D0-X	60	M 12	32	-	-	2.5	-	-	17	12	16	97
GN 41-60-M12-32-D1-X	60	M 12	32	-	-	2.5	-	2	17	12	16	100
GN 41-60-M12-32-D3-X	60	M 12	32	-	-	2.5	4.5	-	17	12	16	100
GN 41-60-M16-37-B0-X	60	M 16	37	6.6	48	2.5	-	-	22	16	16	126
GN 41-60-M16-37-D0-X	60	M 16	37	-	-	2.5	-	-	22	16	16	130
GN 41-60-M16-37-D1-X	60	M 16	37	-	-	2.5	-	2	22	16	16	138
GN 41-60-M16-37-D3-X	60	M 16	37	-	-	2.5	4.5	-	22	16	16	140
GN 41-80-M8-26-B0-X	80	M 8	26	8.5	64	3	-	-	14	8	8	160
GN 41-80-M8-26-D0-X	80	M 8	26	-	-	3	-	-	14	8	8	141
GN 41-80-M8-26-D1-X	80	M 8	26	-	-	3	-	2	14	8	8	155
GN 41-80-M8-26-D3-X	80	M 8	26	-	-	3	5	-	14	8	8	180
GN 41-80-M10-29-B0-X	80	M 10	29	8.5	64	3	-	-	14	10	14	160
GN 41-80-M10-29-D0-X	80	M 10	29	-	-	3	-	-	14	10	14	140
GN 41-80-M10-29-D1-X	80	M 10	29	-	-	3	-	2	14	10	14	160
GN 41-80-M10-29-D3-X	80	M 10	29	-	-	3	5	-	14	10	14	172
GN 41-80-M12-32-B0-X	80	M 12	32	8.5	64	3	-	-	17	12	20	175
GN 41-80-M12-32-D0-X	80	M 12	32	-	-	3	-	-	17	12	20	160
GN 41-80-M12-32-D1-X	80	M 12	32	-	-	3	-	2	17	12	20	180
GN 41-80-M12-32-D3-X	80	M 12	32	-	-	3	5	-	17	12	20	180
GN 41-80-M16-38-B0-X	80	M 16	38	8.5	64	3	-	-	22	16	20	191
GN 41-80-M16-38-D0-X	80	M 16	38	-	-	3	-	-	22	16	20	194
GN 41-80-M16-38-D1-X	80	M 16	38	-	-	3	-	2	22	16	20	220
GN 41-80-M16-38-D3-X	80	M 16	38	-	-	3	5	-	22	16	20	221
GN 41-80-M20-45-B0-X	80	M 20	45	8.5	64	3	-	-	27	20	20	253
GN 41-80-M20-45-D0-X	80	M 20	45	-	-	3	-	-	27	20	20	260
GN 41-80-M20-45-D1-X	80	M 20	45	-	-	3	-	2	27	20	20	300
GN 41-80-M20-45-D3-X	80	M 20	45	-	-	3	5	-	27	20	20	270