

Stainless Steel- Positioning bushings

for indexing plungers / cam action indexing plungers

SPECIFICATION



Stainless Steel AISI 431
hardened

INFORMATION


Stainless Steel-Positioning bushings GN 412.4 are used in connection with bolts of indexing plungers and cam action indexing plungers. The threads are adapted to the mounting blocks GN 412.1 (see page 814) and GN 612.1 (see page 815).

TECHNICAL INFORMATION


- Stainless Steel characteristics (see page A26)



Assembly examples




Flat hexagon
nut GN 909



Mounting block
GN 412.1

Application example

Positioning bushing
GN 412.4

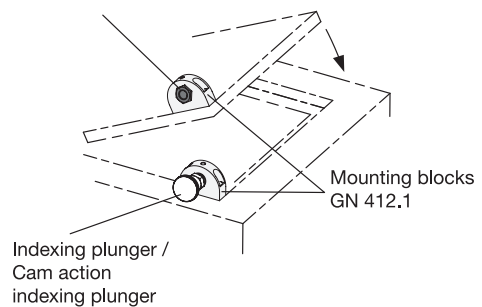

GN 412.4

STAINLESS STEEL

Description	d1	d2 +0.1	d3 -0.05	l1 -0.2	l2	A/F	⚖️
GN 412.4-M12x1,5-B4,2	M 12 x 1.5	B 4.2	12	10	13	13	9
GN 412.4-M12x1,5-B5,2	M 12 x 1.5	B 5.2	12	10	13	13	8
GN 412.4-M12x1,5-B6,2	M 12 x 1.5	B 6.2	12	10	13	13	7
GN 412.4-M16x1,5-B8,2	M 16 x 1.5	B 8.2	16	12	15	17	16
GN 412.4-M16x1,5-B10,2	M 16 x 1.5	B 10.2	16	12	15	17	13
GN 412.4-M16x1,5-B12,2	M 16 x 1.5	B 12.2	16	12	15	17	10