

Folding Handles

**in Both End Positions Retained,
Steel / Stainless Steel**

SPECIFICATION

Hexagon nuts ISO 8675
Stainless steel AISI 304
Washers DIN 125
Stainless steel AISI 304

Version in Steel

Steel **ST**
Chrome plated **CR**

Version in Stainless steel

Stainless steel AISI 303 **NI**
Matte shot-blasted **GS**




INFORMATION

Folding handles GN 425.2 are used in places where the handle must not protrude or protrude only a short distance. In both positions the handle is retained by a spring loaded detent.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Load rating information (see page A35)

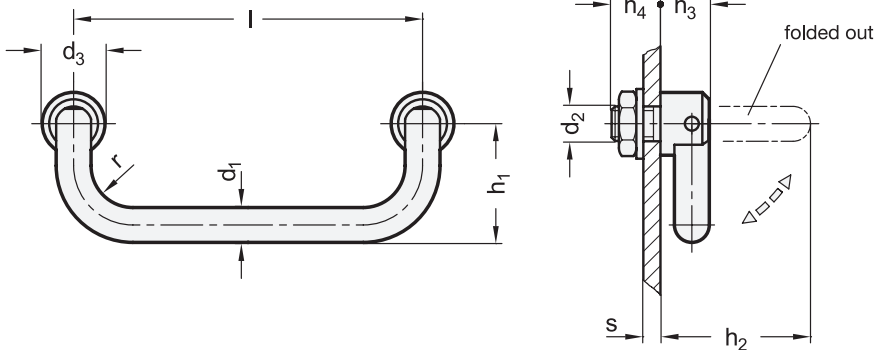

GN 425.2

Description	d1	l ±0.25	d2	d3	h1	h2	h3	h4	r	s max.	⚖
GN 425.2-ST-10-100-CR	10	100	M 10 x 1	18	34	43	14	14	12	6	140
GN 425.2-ST-10-120-CR	10	120	M 10 x 1	18	34	43	14	14	12	6	150
GN 425.2-ST-10-180-CR	10	180	M 10 x 1	18	34	43	14	14	12	6	190

GN 425.2-NI

STAINLESS STEEL

Description	d1	l ±0.25	d2	d3	h1	h2	h3	h4	r	s max.	⚖
GN 425.2-NI-6-55-GS	6	55	M 6	12	21	27.5	9.5	10	6	4	39
GN 425.2-NI-6-64-GS	6	64	M 6	12	21	27.5	9.5	10	6	4	41
GN 425.2-NI-6-88-GS	6	88	M 6	12	21	27.5	9.5	10	6	4	47
GN 425.2-NI-10-100-GS	10	100	M 10 x 1	18	34	43	14	14	12	6	148
GN 425.2-NI-10-120-GS	10	120	M 10 x 1	18	34	43	14	14	12	6	150
GN 425.2-NI-10-180-GS	10	180	M 10 x 1	18	34	43	14	14	12	6	200