


GN 425.5-NI

Folding handles



INOX
Stainless Steel

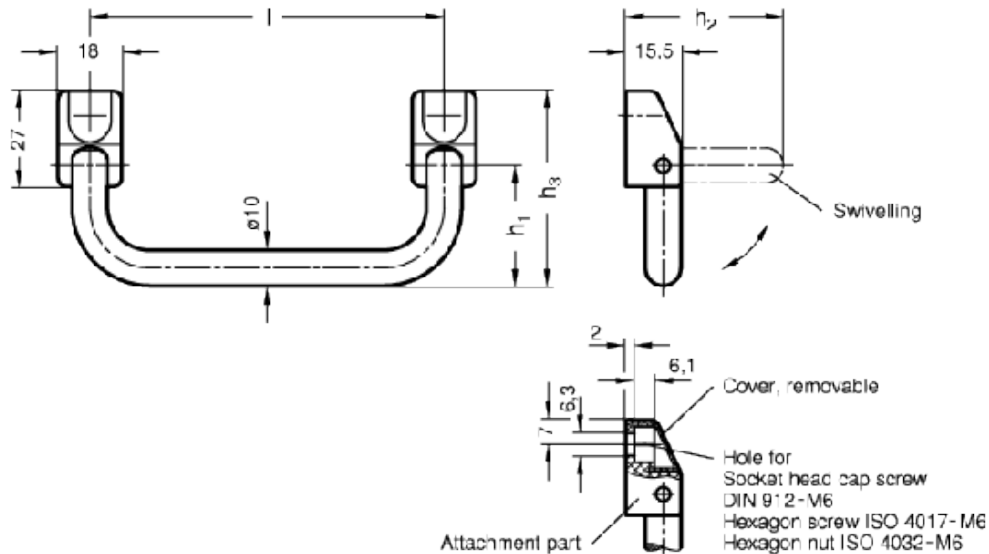

technical informations

Handle

AISI 304 stainless steel. Round cross section bar.

Attachment part

Polyamide based (PA) technopolymer, black, matte finish.
Temperature resistant up to 250 °C.

Cover

Polyamide based (PA) technopolymer, black-grey, matte finish.
Temperature resistant up to 100 °C.

Features and applications

Folding handles GN 425.5 are used in places where the handle must not protrude or produde only a short distance. The handle is locked in place in the resting position by means of a spring-loaded (cuo springs) thrust bolt. The static load capacity value given in the table is an approximate value which, if exceeded, may result in permanent deformation or fracture of the plastic attachment part. The folding handle GN 425.2 may be used as an alternative.

| Standard Elements | Main dimensions | | | | Static load in N | Weight |
|-------------------|-----------------|----------------|----------------|----------------|------------------|--------|
| Description | Length l | h ₁ | h ₂ | h ₃ | swivelling | g |
| GN 425.5-100-NI | 100 | 34 | 44.5 | 55 | 500 | 111 |
| GN 425.5-120-NI | 120 | 34 | 44.5 | 55 | 500 | 120 |
| GN 425.5-180-NI | 180 | 34 | 44.5 | 55 | 500 | 160 |



STANDARD MACHINE ELEMENTS WORLDWIDE