

Stainless Steel- Cabinet U-handles

Hygienic Design

SPECIFICATION

Stainless Steel

- AISI 316 L **A4**
- matte ($R_a < 0.8 \mu\text{m}$) **MT**
- polished ($R_a < 0.8 \mu\text{m}$) **PL**

Sealing ring

H-NBR **H**

temperature resistant -25 °C to +150 °C

EPDM **E**

temperature resistant -40 °C to +120 °C

- blue
- Hardness 85±5 Shore A
- FDA compliant

INFORMATION

GN 429 Stainless Steel-Cabinet U-handles are intended for use in hygiene areas. The sealed mounting surfaces enable fastening without dead spaces. The high quality finish prevents adherence of dirt and facilitates cleaning.

Due to the manufacturing process, **special designs** can be supplied even in relatively small quantities.



In contrast to the MT finish, the PL finish is also certified according to the DGVU Test.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Elastomer characteristics (see page A32)



NV 20031

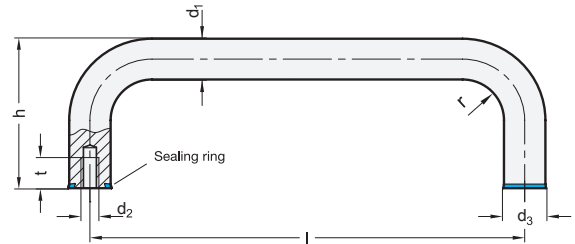

GN 429-H

STAINLESS STEEL

Description	d1	l ±0.5	d2	d3	h	r	t min.	♁
GN 429-A4-12-125-MT-H	12	125	M 5	12.8	51	14	12	170
GN 429-A4-12-125-PL-H	12	125	M 5	12.8	51	14	12	170
GN 429-A4-12-160-MT-H	12	160	M 5	12.8	51	14	12	202
GN 429-A4-12-160-PL-H	12	160	M 5	12.8	51	14	12	202
GN 429-A4-16-160-MT-H	16	160	M 6	16.8	59	18	12	400
GN 429-A4-16-160-PL-H	16	160	M 6	16.8	59	18	12	400
GN 429-A4-16-200-MT-H	16	200	M 6	16.8	59	18	12	436
GN 429-A4-16-200-PL-H	16	200	M 6	16.8	59	18	12	436

GN 429-E

STAINLESS STEEL

Description	d1	l ±0.5	d2	d3	h	r	t min.	♁
GN 429-A4-12-125-MT-E	12	125	M 5	12.8	51	14	12	170
GN 429-A4-12-125-PL-E	12	125	M 5	12.8	51	14	12	170
GN 429-A4-12-160-MT-E	12	160	M 5	12.8	51	14	12	202
GN 429-A4-12-160-PL-E	12	160	M 5	12.8	51	14	12	202
GN 429-A4-16-160-MT-E	16	160	M 6	16.8	59	18	12	400
GN 429-A4-16-160-PL-E	16	160	M 6	16.8	59	18	12	400
GN 429-A4-16-200-MT-E	16	200	M 6	16.8	59	18	12	436
GN 429-A4-16-200-PL-E	16	200	M 6	16.8	59	18	12	436