



GN 480.1-NI

Retaining rods / tubings, round

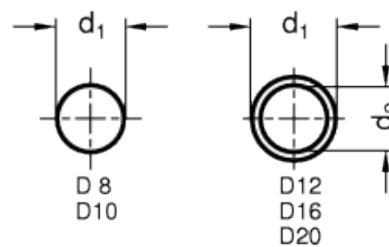

INOX
Stainless Steel

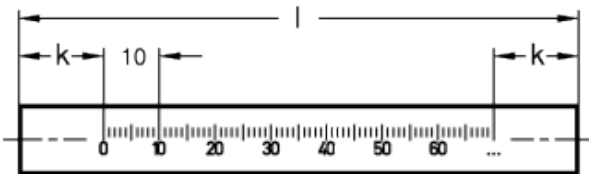

technical informations

Material

AISI 304 stainless steel NI.

Types

- Type OS: without scale.
- Type LS: with scale (mm-graduation), engraved by precision laser.

Features and applications

The outside dimensions of the retaining rods / retaining tubings GN 480.1 are matched for use with clamp mountings. The retaining tubings can also be used as cable lead-through or cable glands.

Special executions on request (For sufficient quantities)

Retaining rods / tubings with other scales.

Standard Elements	Main dimensions				Weight
Description	d_1	Length l	d_2	k	g
GN 480.1-D8-100-NI-OS	D8	100	-	15	39

GN 480.1-D8-150-NI-OS	D8	150	-	15	59
GN 480.1-D8-200-NI-OS	D8	200	-	15	78
GN 480.1-D8-250-NI-OS	D8	250	-	15	98
GN 480.1-D8-300-NI-OS	D8	300	-	15	118
GN 480.1-D8-350-NI-OS	D8	350	-	15	-
GN 480.1-D8-400-NI-OS	D8	400	-	15	-
GN 480.1-D10-100-NI-OS	D10	100	-	15	62
GN 480.1-D10-150-NI-OS	D10	150	-	15	92
GN 480.1-D10-200-NI-OS	D10	200	-	15	123
GN 480.1-D10-250-NI-OS	D10	250	-	15	154
GN 480.1-D10-300-NI-OS	D10	300	-	15	185
GN 480.1-D10-350-NI-OS	D10	350	-	15	-
GN 480.1-D10-400-NI-OS	D10	400	-	15	-
GN 480.1-D12-100-NI-OS	D12	100	9	15	37
GN 480.1-D12-150-NI-OS	D12	150	9	15	56
GN 480.1-D12-200-NI-OS	D12	200	9	15	74
GN 480.1-D12-250-NI-OS	D12	250	9	15	93
GN 480.1-D12-300-NI-OS	D12	300	9	15	112
GN 480.1-D12-350-NI-OS	D12	350	9	15	-
GN 480.1-D12-400-NI-OS	D12	400	9	15	-
GN 480.1-D15-100-NI-OS	D15	100	12	20	46
GN 480.1-D15-150-NI-OS	D15	150	12	20	69
GN 480.1-D15-200-NI-OS	D15	200	12	20	96
GN 480.1-D15-250-NI-OS	D15	250	12	20	114
GN 480.1-D15-300-NI-OS	D15	300	12	20	146
GN 480.1-D15-350-NI-OS	D15	350	12	20	-
GN 480.1-D15-400-NI-OS	D15	400	12	20	-
GN 480.1-D16-100-NI-OS	D16	100	13	20	50
GN 480.1-D16-150-NI-OS	D16	150	13	20	76
GN 480.1-D16-200-NI-OS	D16	200	13	20	101
GN 480.1-D16-250-NI-OS	D16	250	13	20	149
GN 480.1-D16-300-NI-OS	D16	300	13	20	151
GN 480.1-D16-350-NI-OS	D16	350	13	20	-
GN 480.1-D16-400-NI-OS	D16	400	13	20	-
GN 480.1-D20-100-NI-OS	D20	100	16	25	85
GN 480.1-D20-150-NI-OS	D20	150	16	25	133
GN 480.1-D20-200-NI-OS	D16	200	16	25	170
GN 480.1-D20-250-NI-OS	D20	250	16	25	213
GN 480.1-D20-300-NI-OS	D20	300	16	25	256
GN 480.1-D20-350-NI-OS	D20	350	16	25	-
GN 480.1-D20-400-NI-OS	D20	400	16	25	-
GN 480.1-D8-100-NI-LS	D8	100	-	15	39
GN 480.1-D8-150-NI-LS	D8	150	-	15	59
GN 480.1-D8-200-NI-LS	D8	200	-	15	78
GN 480.1-D8-250-NI-LS	D8	250	-	15	98

GN 480.1-D8-300-NI-LS	D8	300	-	15	118
GN 480.1-D8-350-NI-LS	D8	350	-	15	-
GN 480.1-D8-400-NI-LS	D8	400	-	15	-
GN 480.1-D10-100-NI-LS	D10	100	-	15	62
GN 480.1-D10-150-NI-LS	D10	150	-	15	92
GN 480.1-D10-200-NI-LS	D10	200	-	15	123
GN 480.1-D10-250-NI-LS	D10	250	-	15	154
GN 480.1-D10-300-NI-LS	D10	300	-	15	185
GN 480.1-D10-350-NI-LS	D10	350	-	15	-
GN 480.1-D10-400-NI-LS	D10	400	-	15	-
GN 480.1-D12-100-NI-LS	D12	100	9	15	37
GN 480.1-D12-150-NI-LS	D12	150	9	15	56
GN 480.1-D12-200-NI-LS	D12	200	9	15	74
GN 480.1-D12-250-NI-LS	D12	250	9	15	93
GN 480.1-D12-300-NI-LS	D12	300	9	15	112
GN 480.1-D12-350-NI-LS	D12	350	9	15	-
GN 480.1-D12-400-NI-LS	D12	400	9	15	-
GN 480.1-D15-100-NI-LS	D15	100	12	20	46
GN 480.1-D15-150-NI-LS	D15	150	12	20	69
GN 480.1-D15-200-NI-LS	D15	200	12	20	96
GN 480.1-D15-250-NI-LS	D15	250	12	20	114
GN 480.1-D15-300-NI-LS	D15	300	12	20	146
GN 480.1-D15-350-NI-LS	D15	350	12	20	-
GN 480.1-D15-400-NI-LS	D15	400	12	20	-
GN 480.1-D16-100-NI-LS	D16	100	13	20	50
GN 480.1-D16-150-NI-LS	D16	150	13	20	76
GN 480.1-D16-200-NI-LS	D16	200	13	20	101
GN 480.1-D16-250-NI-LS	D16	250	13	20	149
GN 480.1-D16-300-NI-LS	D16	300	13	20	151
GN 480.1-D16-350-NI-LS	D16	350	13	20	-
GN 480.1-D16-400-NI-LS	D16	400	13	20	-
GN 480.1-D20-100-NI-LS	D20	100	16	25	85
GN 480.1-D20-150-NI-LS	D20	150	16	25	133
GN 480.1-D20-200-NI-LS	D20	200	16	25	170
GN 480.1-D20-250-NI-LS	D20	250	16	25	213
GN 480.1-D20-300-NI-LS	D20	300	16	25	256
GN 480.1-D20-350-NI-LS	D20	350	16	25	-
GN 480.1-D20-400-NI-LS	D20	400	16	25	-

