


GN 598.7

Safety fold-away handles

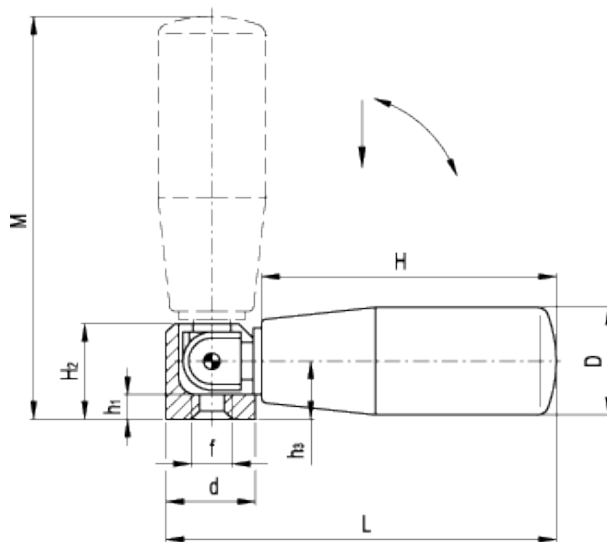

technical informations

Material

Black phenolic based (PF) Duroplast. Resistant to solvents, oils, greases and other chemical agents.

Stud

Black-oxide steel.

Features and applications

Handle pivots freely during operation: a system of coaxial bushes compensates return spring load. When releasing the handle, the spring returns it back to the retracted position.

GN 598.7 safety fold-away handles are suitable when the handle must not remain in the operating position. In order to bring the handle into the operating position it has to be turned first through 90° to a stop against a torsion spring and then it has to be pushed against spring pressure into its hold position. By maintaining the forward thrust on the handle, the handwheel can easily be rotated.

Standard Elements	Main dimensions							Mounting hole		Weight
Description	H	L	M	D	H ₂	d	h ₃	f	h ₁	g
GN 598.7-KU-23	65	87	87	23	22	20	13	M6	5.5	91
GN 598.7-KU-26	80	102	102	26	22	20	13	M6	5.5	110



STANDARD MACHINE ELEMENTS WORLDWIDE