


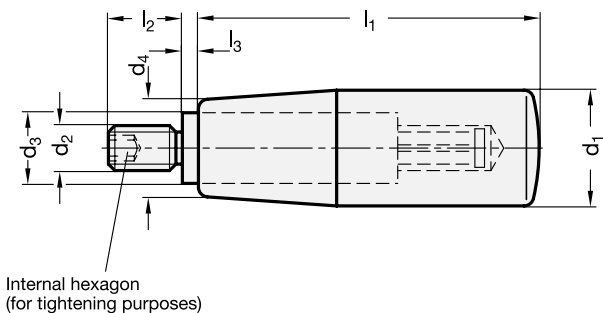

2		3										
d ₁	d ₂ Plastic KU			KT		Steel ST		d ₃	d ₄	l ₁	l ₂	l ₃
14	-	-	M 6	-	-	-	-	8	11	28	10	0,5
18	M 6	-	M 6	-	M 6	-	-	10	15	40	12	2,5
21	M 6	M 8	M 6	M 8	M 6	M 8	-	10	17	50	13	2,5
22	M 6	M 8	M 6	M 8	-	-	-	10	18	56	13	2,5
23	M 8	M 10	M 8	M 10	M 8	M 10	-	13	19	65	14	2,5
26	M 8	M 10	M 8	M 10	M 8	M 10	-	13	21	80	16	2,5
28	M 10	-	M 10	-	M 10	-	-	13	22	90	16	2,5
31	M 12	-	-	-	M 12	-	-	14	25	102	20	2,5

Specification

- Plastic
Duroplast (Phenolic PF)
- temperature resistant up to 110 °C
- black, shiny finish

KU

- Plastic
Technopolymer (Polypropylene PP)
- temperature resistant up to 80 °C
- black, matt finish
- black, shiny finish (only size 14)

KT

- Steel
Plastic coated
black, textured finish

ST

- Spindle Steel
zinc plated, blue passivated

- RoHS-compliant

Information

Steel revolving handles GN 598 are mainly used on safety handwheels to increase imbalance and thus avoid free wheeling.

see also...

- Fixed cylindrical handles GN 539

How to order

GN598-KU-21-M8

1 Material

2 d₁

3 d₂