


# GN 607.2

Indexing plungers

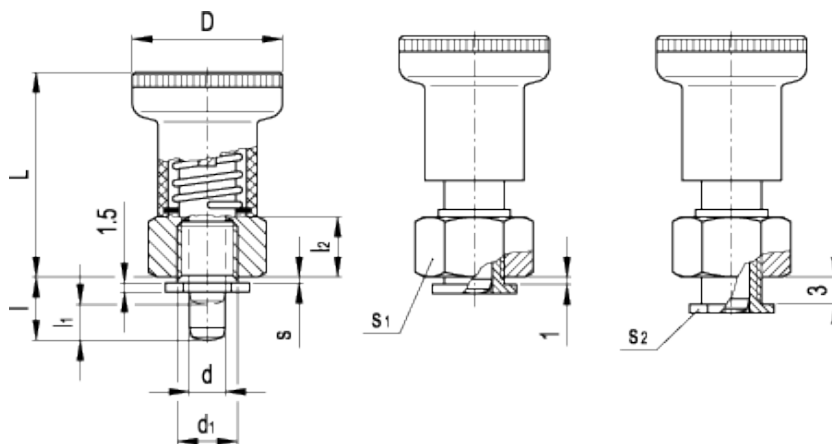

## technical informations

### Threaded body

Zinc-plated steel.

### Plunger

Nickel-plated AISI 303 stainless steel. Suggested matching hole in G7 tolerance.

### Centre bush

Zinc-plated steel.

### "Push/Pull" knurled knob


High resilience polyamide based (PA) technopolymer, black colour, matte finish. Resistant to solvents, oils, greases and other chemical agents.

### Features


GN 607.2 indexing plungers can be assembled on thin section metal sheets (from 1 to 5 mm). The plunger may not retract

completely in its starting position according to the thickness of the metal sheet "s".  
 A double ring spanner (1mm thick zinc plated sheet steel) for installing this indexing plunger is available (code GN 607.9-SW14-SW16).

GN 607.9



Application example

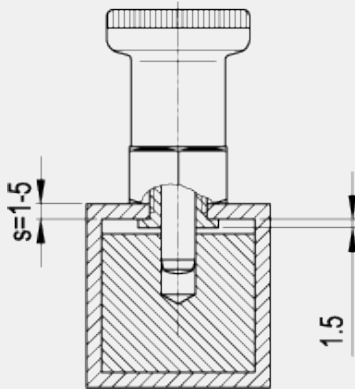

Standard Elements	Main dimensions										Spring pressure		Axial holding force [N]	Weight [g]
	Description	$d \begin{smallmatrix} -0.02 \\ -0.04 \end{smallmatrix}$	L	$d_1$	D	I	$I_1$ stroke	$I_2$	S clamping distance	$s_1$	$s_2$	Preload [N~]		
GN 607.2-6-8.5-ST	6	34	M10	25	8.5	6	10	1÷5	17	14	8.5	22	400	40
GN 607.2-6-10.5-ST	6	34	M10	25	10.5	6	10	1÷5	17	14	8.5	22	400	40
GN 607.2-8-10-ST	8	40	M12	31	10	7.5	12	1÷5	19	16	15.5	28	500	62
GN 607.2-8-12-ST	8	40	M12	31	12	7.5	12	1÷5	19	16	15.5	28	500	65



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE