


GN 615.2

Threaded ball spring plungers

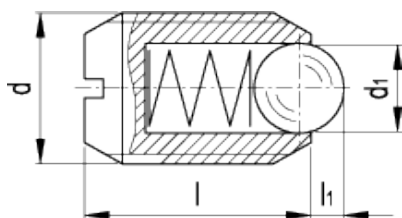

technical informations

Threaded body

Acetal resin based (POM) technopolymer, screwdriver slotted head. Resistant to solvents, oils, greases and other chemical agents.

Ball and spring

- Execution NI: hardened stainless steel ball, stainless steel spring.
- Execution P: technopolymer ball, stainless steel spring.

Working temperature

From -30°C to +50°C.

Standard Elements	Main dimensions				Spring pressure		Weight
Description	d	d ₁	l	l ₁	Preload [N~]	Max. load [N~]	g
GN 615.2-M6-NI	M6	3.5	14	1	12	17	1
GN 615.2-M8-NI	M8	5	16	1.5	20	35	2
GN 615.2-M10-NI	M10	6	19	2	25	45	3
GN 615.2-M6-P	M6	3.5	14	1	12	17	1
GN 615.2-M8-P	M8	5	16	1.5	20	35	2
GN 615.2-M10-P	M10	6	19	2	25	45	3



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE