


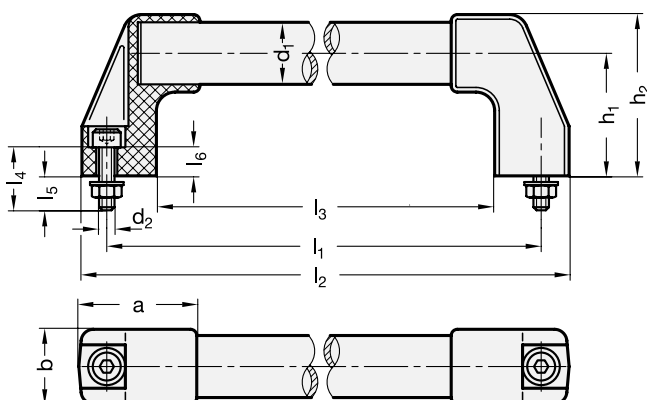

ROOSTAHL®
**Rost
 frei** Inox
 Stainless
 Steel

1 d_1	2 $l_1 \pm 1$	a	b	d_2	h_1	h_2	l_2	l_3	l_4	l_5	l_6
20	180	48	28	M 8	45	58	200	142	25	15,5	9,5
20	200	48	28	M 8	45	58	220	162	25	15,5	9,5
20	250	48	28	M 8	45	58	270	212	25	15,5	9,5
20	300	48	28	M 8	45	58	320	262	25	15,5	9,5
20	350	48	28	M 8	45	58	370	312	25	15,5	9,5
20	400	48	28	M 8	45	58	420	362	25	15,5	9,5
30	300	57	38	M 10	60	78	324	254	35	20,5	14,5
30	350	57	38	M 10	60	78	374	304	35	20,5	14,5
30	400	57	38	M 10	60	78	424	354	35	20,5	14,5
30	500	57	38	M 10	60	78	524	454	35	20,5	14,5
30	600	57	38	M 10	60	78	624	554	35	20,5	14,5
30	700	57	38	M 10	60	78	724	654	35	20,5	14,5
30	1000	57	38	M 10	60	78	1024	954	35	20,5	14,5

Specification

- Tube $\varnothing 20 \times 1,5$ / $\varnothing 30 \times 1,5$
 Aluminium
 - plastic coated
 black, RAL 9005, textured finish ● **SW**
 - anodized, natural colour ● **EL**
 Stainless Steel
 - German Material No.1.4301
 - ground, matt shiny finish ● **NG**
- End pieces plastic
 Technopolymer (Polyamide PA)
 - glass fibre reinforced
 - temperature resistant up to 100 °C
 - black, matt
- Socket head screws DIN 912
 Steel zinc plated / Stainless Steel 1.4301
- Hexagon nuts ISO 4032
 Steel zinc plated / Stainless Steel 1.4301
- Washersn DIN 125
 Steel zinc plated / Stainless Steel 1.4305
- RoHS compliant

3

Information

The handle tube of the GN 667 tubular handles can be mounted without any further machining, allowing **special lengths** to be realised easily.

Cabinet „U“ handle

GN667-20-200-EL

1	d_1
2	l_1
3	Finish

Stainless Steel-Cabinet „U“ handle

GN667-30-1000-NG

1	d_1
2	l_1
3	Finish