


GN 709.25


Clamping pads



INOX
Stainless Steel

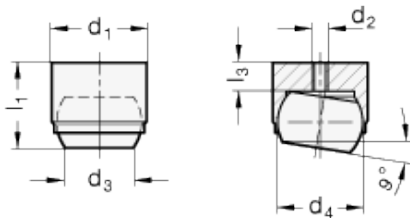

Application example
when used as
spring plunger



technical informations

Material

AISI 431 tempered stainless steel.

Ball

AISI 420C stainless steel, nickel-plated.

Standard versions available

- Version B: smooth contact face.

Special executions on request (For sufficient quantities)

Serrated hard metal ball.

Features and applications

Stainless Steel-Clamping pads GN 709.25 are used as mobile supports or as spring plungers for clamping workpieces. They can also be used as a back stop.

The ball is limited to an angular movement of 9° only.

Standard Elements	Main dimensions								Static load max. in kN	Weight
Description	d _{1 n6}	d ₂	d ₃	d ₄	d _{5 H7}	l _{1 ±0.2}	l _{3 max.}	t _{min.}		g
GN 709.25-12-M3-B	12	M3	7.2	10	12	11	3.2	6	10	8
GN 709.25-18-M4-B	18	M4	10.5	16	18	17	4.0	8	25	28
GN 709.25-28-M5-B	28	M5	20	25	28	25	5.5	13	90	107



STANDARD MACHINE ELEMENTS WORLDWIDE