

Stainless Steel Threaded Plugs

AISI 316L

SPECIFICATION

Types

- Type **O**: Neutral
- Type **E**: With DIN fill symbol
- Type **A**: With DIN drain symbol

Identification no.

- No. **1**: Without vent drilling
- Stainless steel AISI 316L
Precision turned, plain finish

Seal

Fluoro-elastomer (FPM / FKM)

- Brown
- Temperature resistant up to 180 °C



INFORMATION


Stainless steel threaded plugs GN 742.5 can be used in particularly aggressive environments thanks to the material used. The seal is embedded in a radial recess and thus cannot be lost, squeezed out or overloaded during tightening. The outer diameter d_1 of the stainless steel threaded plugs GN 742.5 is matched to screw-in holes for pipe fittings according to DIN 3852.

ON REQUEST

- Other thread sizes
- With dipstick
- With acrylonitrile butadiene rubber (NBR) seal GN 741.5

TECHNICAL INFORMATION


- Elastomer Characteristics (see page A32)
- Stainless Steel Characteristics (see page A26)

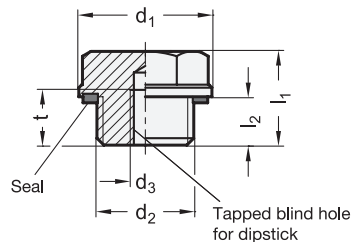

Fill symbol



Drain symbol



* Complete with type index of the Threaded Plugs

O	E	A
Neutral	With DIN fill symbol	With DIN drain symbol

GN 742.5

STAINLESS STEEL

Description	d_1	d_2	d_3	$e \approx$	l_1	l_2	s	t	Δ
GN 742.5-19-G1/4-*1	19	G 1/4	M 5	17.3	15.5	8	15	8	20
GN 742.5-19-M14X1,5-*1	19	M 14 x 1.5	M 5	17.3	15.5	8	15	8	20
GN 742.5-22-G3/8-*1	22	G 3/8	M 5	20.8	15.5	8	18	8	29
GN 742.5-22-M16X1,5-*1	22	M 16 x 1.5	M 5	20.8	15.5	8	18	8	29
GN 742.5-26-G1/2-*1	26	G 1/2	M 5	24.3	16	8.5	21	8	44
GN 742.5-26-M20X1,5-*1	26	M 20 x 1.5	M 5	24.3	16	8.5	21	8	44
GN 742.5-32-G3/4-*1	32	G 3/4	M 5	31.2	17	9	27	8	78
GN 742.5-32-M26X1,5-*1	32	M 26 x 1.5	M 5	31.2	17	9	27	8	78
GN 742.5-40-G1-*1	40	G 1	M 5	37	19.5	11	32	8	136
GN 742.5-40-M33X1,5-*1	40	M 33 x 1.5	M 5	37	19.5	11	32	8	136

Weight type O