


# GN 807

Clamping bolts

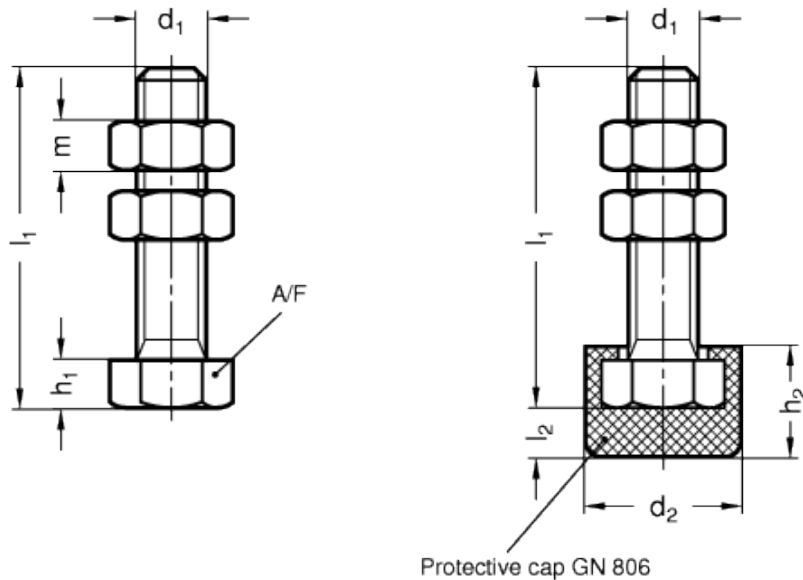

## technical informations

### Material

DIN 933 zinc-plated steel hexagon bolt, class 8.8 (tensile strength 800 N/mm<sup>2</sup>), blue passivated.

- Version A: without protective cap.

- Version B: with DIN 806 protective cap (only for  $d_1 \leq M12$ ).

### Hexagon nuts

Zinc-plated steel, blue passivated.

### Features and applications

The hexagonal nuts are included.

Standard Elements	Main dimensions								Weight
Description	d <sub>1</sub>	l <sub>1</sub>	d <sub>2</sub>	h <sub>1</sub>	h <sub>2</sub>	l <sub>2</sub>	m	sw	g
GN 807-M4-23-A	M4	23	-	3	-	-	3.2	7	5
GN 807-M5-38-A	M5	38	-	3.5	-	-	4.7	8	9
GN 807-M6-29-A	M6	29	-	4	-	-	5.2	10	11
GN 807-M6-49-A	M6	49	-	4	-	-	5.2	10	17
GN 807-M8-36-A	M8	36	-	5.5	-	-	6.8	13	24
GN 807-M8-56-A	M8	56	-	5.5	-	-	6.8	13	30
GN 807-M8-96-A	M8	96	-	5.5	-	-	6.8	13	43
GN 807-M10-43-A	M10	43	-	6.5	-	-	8.4	16	47
GN 807-M10-77-A	M10	77	-	6.5	-	-	8.4	16	67
GN 807-M10-127-A	M10	127	-	6.5	-	-	8.4	16	92
GN 807-M12-53-A	M12	53	-	7.5	-	-	10.8	18	75
GN 807-M12-88-A	M12	88	-	7.5	-	-	10.8	18	101
GN 807-M12-128-A	M12	128	-	7.5	-	-	10.8	18	129
GN 807-M14-54-A	M14	54	-	9	-	-	12.8	21	109
GN 807-M4-23-B	M4	23	11	3	6.5	2.5	3.2	7	6
GN 807-M5-38-B	M5	38	12.5	3.5	8	2.5	4.7	8	10
GN 807-M6-29-B	M6	29	15	4	10	4	5.2	10	13
GN 807-M6-49-B	M6	49	15	4	10	4	5.2	10	19
GN 807-M8-36-B	M8	36	19	5.5	13	5.5	6.8	13	29
GN 807-M8-56-B	M8	56	19	5.5	13	5.5	6.8	13	34
GN 807-M8-96-B	M8	96	19	5.5	13	5.5	6.8	13	47
GN 807-M10-43-B	M10	43	24	6.5	16	7	8.4	16	54
GN 807-M10-77-B	M10	77	24	6.5	16	7	8.4	16	74
GN 807-M10-127-B	M10	127	24	6.5	16	7	8.4	16	99
GN 807-M12-53-B	M12	53	26	7.5	19	8.5	10.8	18	85
GN 807-M12-88-B	M12	88	26	7.5	19	8.5	10.8	18	111
GN 807-M12-128-B	M12	128	26	7.5	19	8.5	10.8	18	139



STANDARD MACHINE ELEMENTS WORLDWIDE