

Universal joint shafts with friction bearing

with longitudinal compensation

SPECIFICATION

Bore code

- Version **K**: with keyway

Steel blank

Joint bearing areas / pins / bearing sleeves case hardened

INFORMATION

Universal joint shafts with friction bearing GN 808.2 not only join the offset between two shafts, but also enable the alignment of lengths, which depending on the overall length l_1 enables the corresponding extraction length l_2 . The power transmission is achieved by two universal joints DIN 808 (see page 1126) (type EG) a splined shaft and a sliding sleeve.


It is important to check the accuracy when connecting the splined shaft to the sliding sleeve: The markings $\rightarrow <$ have to be opposite to each other. Any kind of misconnection leads to an inhomogeneous output and to a quick abrasion.

ON REQUEST

- different length $l_1 - l_2$
- Bores without keyway
- Bores with square
- Bores with hexagon
- with other or unequal bores
- Version in Stainless Steel

TECHNICAL INFORMATION

- Permissible r.p.m. and torque (see page 1124)
- Keyway DIN 6885 (see page A16)
- Cross holes GN 110.1 (see page A17)
- ISO-Fundamental Tolerances (see page A21)

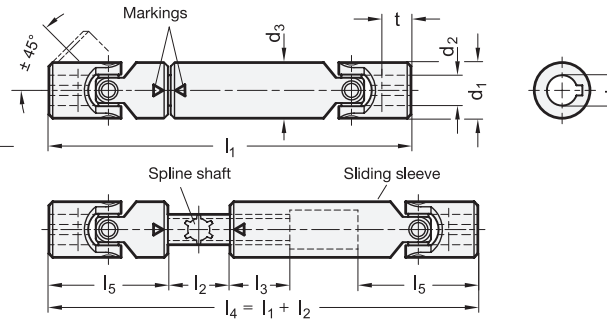

GN 808.2

Description	d1	d2 H7	l1-l2	d3	l3	l5	t +1	Δ
GN 808.2-22-K10-140-30	22	K10	140-30	22	30	48	12	310
GN 808.2-22-K10-160-40	22	K10	160-40	22	30	48	12	368
GN 808.2-22-K10-180-60	22	K10	180-60	22	30	48	12	400
GN 808.2-22-K10-230-100	22	K10	230-100	22	30	48	12	500
GN 808.2-25-K12-160-30	25	K12	160-30	26	40	56	13	502
GN 808.2-25-K12-180-45	25	K12	180-45	29	40	56	13	554
GN 808.2-25-K12-200-70	25	K12	200-70	29	40	56	13	620
GN 808.2-25-K12-250-105	25	K12	250-105	29	40	56	13	750
GN 808.2-25-K12-300-150	25	K12	300-150	29	40	56	13	900
GN 808.2-28-K14-170-30	28	K14	170-30	32	40	60	13	630
GN 808.2-28-K14-200-60	28	K14	200-60	37	40	60	13	719
GN 808.2-28-K14-220-80	28	K14	220-80	37	40	60	13	785
GN 808.2-28-K14-280-140	28	K14	280-140	37	40	60	13	990
GN 808.2-28-K14-350-200	28	K14	350-200	37	40	60	13	1140
GN 808.2-28-K14-400-250	28	K14	400-250	37	40	60	13	1330
GN 808.2-32-K16-190-30	32	K16	190-30	37	40	68	16	900
GN 808.2-32-K16-210-40	32	K16	210-40	42	40	68	16	980
GN 808.2-32-K16-240-80	32	K16	240-80	42	40	68	16	1093
GN 808.2-32-K16-275-115	32	K16	275-115	42	40	68	16	1245
GN 808.2-32-K16-380-210	32	K16	380-210	42	40	68	16	1600
GN 808.2-32-K16-400-230	32	K16	400-230	42	40	68	16	1730

GN 808.2

Description	d1	d2 H7	l1-l2	d3	l3	l5	t +1	Δ
GN 808.2-36-K18-230-50	36	K18	230-50	52	40	74	17	1368
GN 808.2-36-K18-270-100	36	K18	270-100	52	40	74	17	1560
GN 808.2-36-K18-290-110	36	K18	290-110	58	40	74	17	1665
GN 808.2-36-K18-400-220	36	K18	400-220	58	40	74	17	2225
GN 808.2-36-K18-500-320	36	K18	500-320	58	40	74	17	2750
GN 808.2-42-K20-250-50	42	K20	250-50	42	45	82	18	1990
GN 808.2-42-K20-290-90	42	K20	290-90	42	45	82	18	2250
GN 808.2-42-K20-320-120	42	K20	320-120	42	45	82	18	2400
GN 808.2-42-K20-420-220	42	K20	420-220	42	45	82	18	3130
GN 808.2-42-K20-500-300	42	K20	500-300	42	45	82	18	3660
GN 808.2-45-K22-270-50	45	K22	270-50	45	50	95	22	2200
GN 808.2-45-K22-330-100	45	K22	330-100	45	50	95	22	3010
GN 808.2-45-K22-470-240	45	K22	470-240	45	50	95	22	4140
GN 808.2-50-K25-295-50	50	K25	295-50	52	50	108	26	3400
GN 808.2-50-K25-350-100	50	K25	350-100	52	50	108	26	3920
GN 808.2-50-K25-420-170	50	K25	420-170	52	50	108	26	4605
GN 808.2-50-K25-500-245	50	K25	500-245	52	50	108	26	4130
GN 808.2-58-K30-330-50	58	K30	330-50	58	60	122	29	4880
GN 808.2-58-K30-370-85	58	K30	370-85	58	60	122	29	5420
GN 808.2-58-K30-400-110	58	K30	400-110	58	60	122	29	5880
GN 808.2-58-K30-500-220	58	K30	500-220	58	60	122	29	7140