


GN 822-NI

Mini indexing plungers



INOX
Stainless Steel

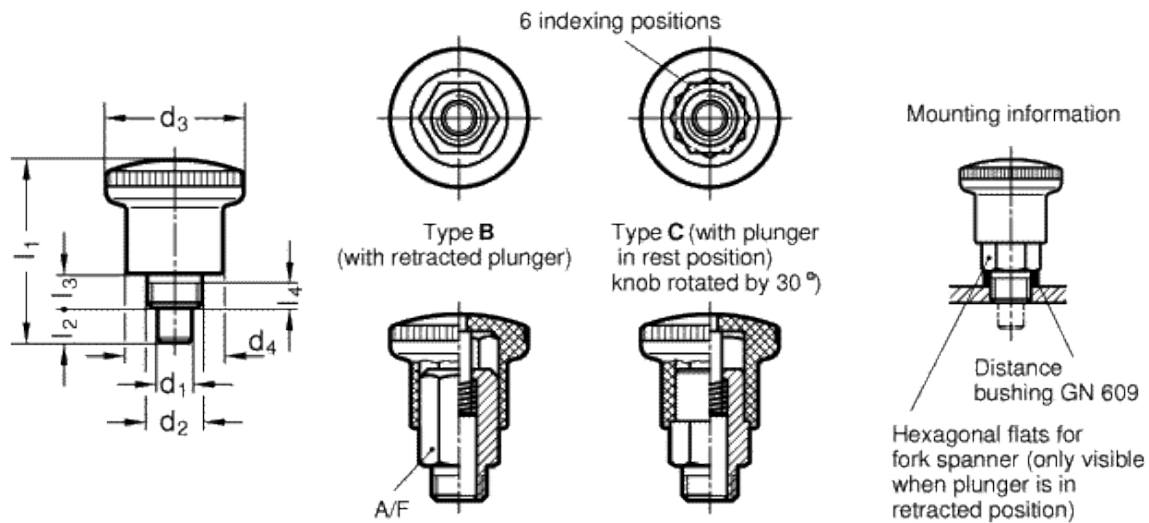

technical informations

Specification

Types

- Type B: without rest Position, with plastic knob
- Type C: with rest Position

Stainless Steel NI
AISI 303

Plunger
Stainless Steel AISI 303

Spring Stainless Steel AISI 301

Knob Plastic (Polyamide PA)
- black, matt
- red, RAL 3000 RT
- not removable

Information

Mini indexing plungers GN 822 are distinguished for their small dimensions. They have been designed for installation in thin walled sheet metal constructions.

They are inserted into position by holding them by the serrated knob. The spanner flats on the lock nut are revealed when retracting the pin, so that the mini indexing plunger can be easily tightened by means of a fork spanner. With Type C the knob can be turned by 30° and a notch keeps the knob in this position.

Accessories on request

Distance bushings GN 609.5.

Standard Elements	Main dimensions									Spring pressure in N \approx		Weight g
	Description	d ₁ 0/-0.06	d ₂	d ₃	d ₄	l ₁	l ₂ min.	l ₃	l ₄ min.	A/F	Preload	
GN 822-4-B-NI	4	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	13
GN 822-5-B-NI	5	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	19
GN 822-6-B-NI	6	M10x1	25	18	34	7	7	4.5	12	5	18	24
GN 822-7-B-NI	7	M10x1	25	18	34	7	7	4.5	12	5	18	30
GN 822-4-C-NI	4	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	20
GN 822-5-C-NI	5	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	20
GN 822-6-C-NI	6	M10x1	25	18	34	7	7	4.5	12	5	18	24
GN 822-7-C-NI	7	M10x1	25	18	34	7	7	4.5	12	5	18	30
GN 822-4-B-NI-RT	4	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	13
GN 822-5-B-NI-RT	5	M9x0.75	21	15	26.5	5	5	3.5	10	4.5	12	14
GN 822-6-B-NI-RT	6	M10x1	25	18	34	7	7	4.5	12	5	18	24
GN 822-7-B-NI-RT	7	M10x1	25	18	34	7	7	4.5	12	5	18	25
GN 822-4-C-NI-RT	4	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	14
GN 822-5-C-NI-RT	5	M8x0.75	21	15	26.5	5	5	3.5	10	4.5	12	14
GN 822-6-C-NI-RT	6	M10x1	25	18	34	7	7	4.5	12	5	18	24
GN 822-7-C-NI-RT	7	M10x1	25	18	34	7	7	4.5	12	5	18	25



STANDARD MACHINE ELEMENTS WORLDWIDE