
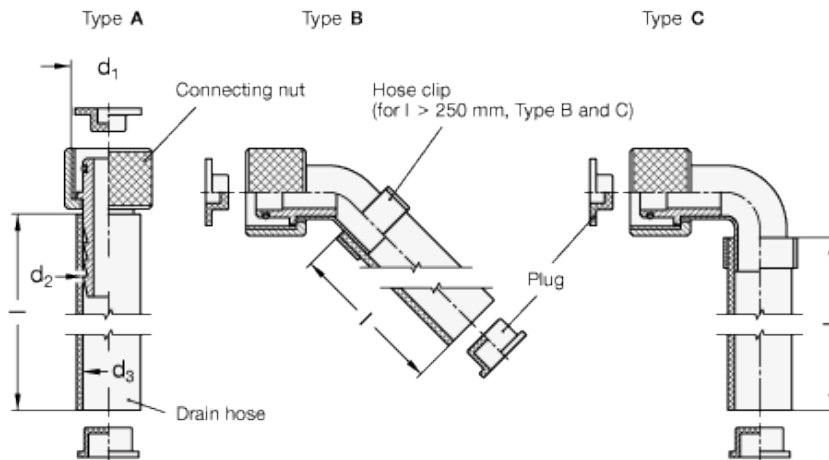


# GN 880.1

Connector pieces with drain hose



technical informations

**Connecting nut**

Brass, with hose liner.

**L bend**

Copper 45° / 90°.

**O-ring**

NBR (Perbunan) synthetic rubber.

**Drain hose**

Version T: PVC, transparent.

**Hose clip**

Zinc-plated steel.

### Plug

Plastic, LD-PE.

### Standard versions available

- Type A: Connector straight.
- Type B: Connector 45°.
- Type C: Connector 90°.

### Accessories on request

- other hose length.
- Drain hose with inside webbing (Nylon).

### Features and applications

Connector pieces GN 880.1 are required when using oil drain valves GN 880. Screwing on the connector piece will activate the valve plate of the oil drain valve, allowing the oil to flow through the hose into a pan held ready. The plug prevents remaining oil from dripping out after discharging.

Standard Elements	Main dimensions					Weight	
	Description	Size	d <sub>1</sub> *	l	d <sub>2</sub>		d <sub>3</sub>
GN 880.1-22-A-250-T		22	M22x1.5	250	15	14	97
GN 880.1-22-B-250-T		22	M22x1.5	250	15	14	97
GN 880.1-22-C-250-T		22	M22x1.5	250	15	14	97
GN 880.1-22-A-500-T		22	M22x1.5	500	15	14	140
GN 880.1-22-B-500-T		22	M22x1.5	500	15	14	140
GN 880.1-22-C-500-T		22	M22x1.5	500	15	14	140
GN 880.1-22-A-1000-T		22	M22x1.5	1000	15	14	220
GN 880.1-22-B-1000-T		22	M22x1.5	1000	15	14	220
GN 880.1-22-C-1000-T		22	M22x1.5	1000	15	14	220
GN 880.1-26-A-250-T		26	M26x1.5	250	20	19	153
GN 880.1-26-B-250-T		26	M26x1.5	250	20	19	153
GN 880.1-26-B-250-T		26	M26x1.5	250	20	19	153
GN 880.1-26-A-500-T		26	M26x1.5	500	20	19	230
GN 880.1-26-B-500-T		26	M26x1.5	500	20	19	230
GN 880.1-26-C-500-T		26	M26x1.5	500	20	19	230
GN 880.1-26-A-1000-T		26	M26x1.5	1000	20	19	390
GN 880.1-26-B-1000-T		26	M26x1.5	1000	20	19	390
GN 880.1-26-C-1000-T		26	M26x1.5	1000	20	19	390

\* Connection thread for GN 880.

