


GN 880.1

Connector pieces

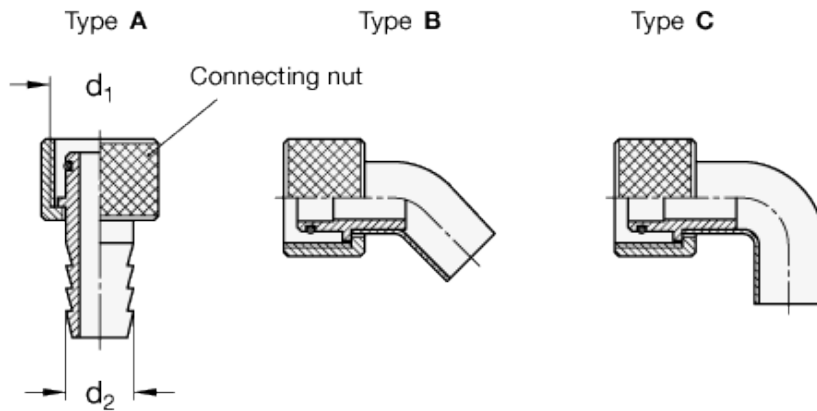

technical informations

Connecting nut
Brass, with hose liner.

L bend

Copper 45° / 90°.

O-ring

NBR (Perbunan) synthetic rubber.

Hose clip

Zinc-plated steel.

Plug

Plastic, LD-PE.

Standards versions available

- Type A: Connector straight.
- Type B: Connector 45°.
- Type C: Connector 90°.

Accessories on request

- other hose length.
- Drain hose with inside webbing (Nylon).

Features and applications

Connector pieces GN 880.1 are required when using oil drain valves GN 880.

Screwing on the connector piece will activate the valve plate of the oil drain valve, allowing the oil to flow through the hose into a pan held ready.

The plug prevents remaining oil from dripping out after discharging.

The plugs and the hose clip (only type B and C) are included parts of the order.

Standard Elements		Main dimensions			Weight
Description	Size	d ₁ *	d ₂	g	
GN 880.1-22-A	22	M22x1.5	15	58	
GN 880.1-22-B	22	M22x1.5	15	58	
GN 880.1-22-C	22	M22x1.5	15	61	
GN 880.1-26-A	26	M26x1.5	20	88	
GN 880.1-26-B	26	M26x1.5	20	86	
GN 880.1-26-C	26	M26x1.5	20	89	

* Connection thread GN 880



STANDARD MACHINE ELEMENTS WORLDWIDE