


# GN 99.2

Adjustable clamping levers

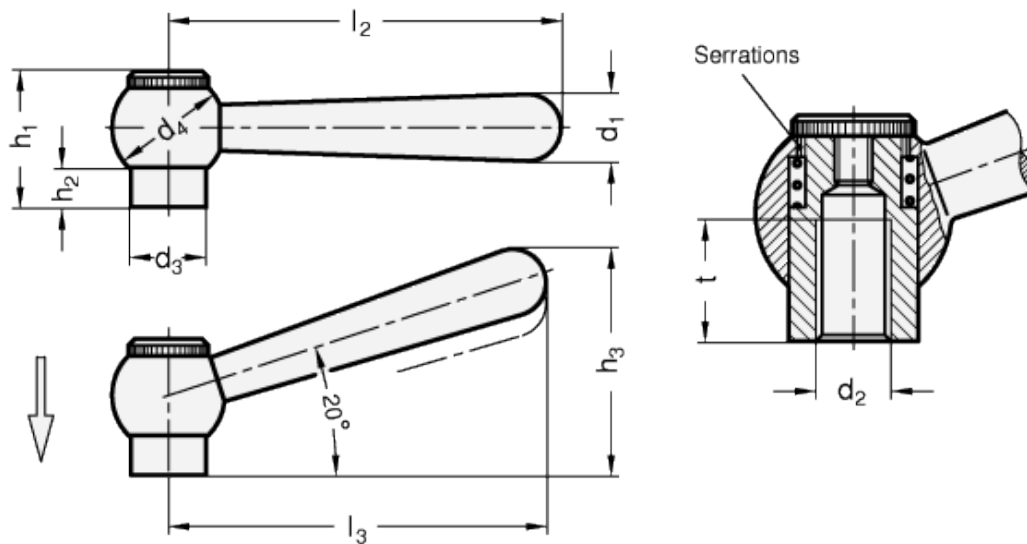

## technical informations

### Material

Blackened Steel.

### Standard versions available:

- Type M: Straight lever.
- Type N: Angled lever.

### Features and applications

Adjustable clamping levers GN 99.2 are known for their small dimensions.

They are for use in applications where either the clamping range is limited or where a specific lever position is required. The serrated bore in the spherical hub is fitted with a threaded bolt insert which engages in the hub with its own serrations.

By depressing the clamping lever the serrations are disengaged freeing it for re-positioning in the most convenient position. When releasing the lever the serrations will re-engage automatically.

Should a rotation of 360° not be possible the insert can be slightly screwed in (after the lever has been disengaged) by means of the slotted knurled screw.

Standard Elements	Main dimensions								Mounting hole		Weight
Description	d <sub>1</sub>	d <sub>3</sub>	d <sub>4</sub>	h <sub>1</sub>	h <sub>2</sub>	h <sub>3</sub> -	l <sub>2</sub>	l <sub>3</sub> -	d <sub>2</sub>	t <sub>min.</sub>	g
GN 99.2-10-M6-M	10	M6	13.5	20	25	8	39.5	63	60	12	61
GN 99.2-10-M6-N	10	M6	13.5	20	25	8	39.5	63	60	12	61
GN 99.2-10-M8-M	10	M8	13.5	20	25	8	39.5	63	60	12	59
GN 99.2-10-M8-N	10	M8	13.5	20	25	8	39.5	63	60	12	59
GN 99.2-13-M8-M	13	M8	16	25	29	8	49.5	80	76	15	122
GN 99.2-13-M8-N	13	M8	16	25	29	8	49.5	80	76	15	122
GN 99.2-13-M10-M	13	M10	16	25	29	8	49.5	80	76	15	118
GN 99.2-13-M10-N	13	M10	16	25	29	8	49.5	80	76	15	118
GN 99.2-16-M10-M	16	M10	19	28	33.5	10.5	60.5	100	95	18	192
GN 99.2-16-M10-N	16	M10	19	28	33.5	10.5	60.5	100	95	18	192
GN 99.2-16-M12-M	16	M12	19	28	33.5	10.5	60.5	100	95	18	195
GN 99.2-16-M12-N	16	M12	19	28	33.5	10.5	60.5	100	95	18	195



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE