


GN 99.2

Adjustable clamping levers

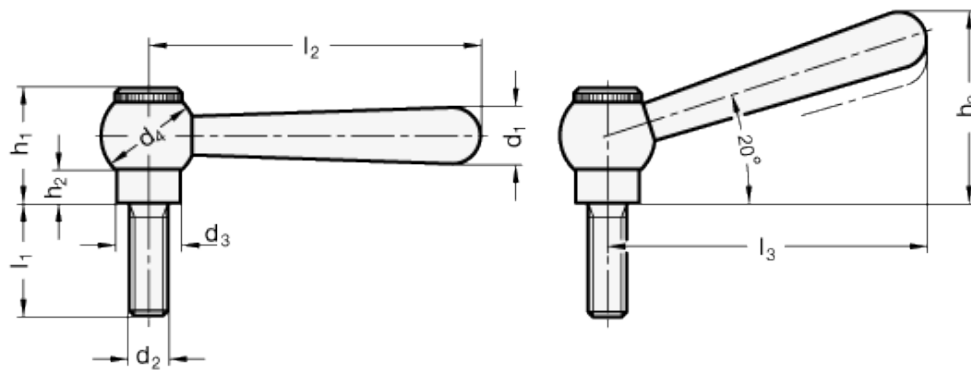

technical informations

Material

Blackened Steel.

Threaded stud

Tensile strength class 5.8 (500N/mm²).

Standard versions available

- Type M: Straight lever.
- Type N: Angled lever.

Features and applications

Adjustable clamping levers GN 99.2 are known for their small dimensions.

They are for use in applications where either the clamping range is limited or where a specific lever position is required. The serrated bore in the spherical hub is fitted with a threaded bolt insert which engages in the hub with its own serrations.

By depressing the clamping lever the serrations are disengaged freeing it for re-positioning in the most convenient position. When releasing the lever the serrations will re-engage automatically.

Should a rotation of 360° not be possible the insert can be slightly screwed in (after the lever has been disengaged) by means of the slotted knurled screw.

Standard Elements	Main dimensions								Mounting hole		Weight
Description	d ₁	d ₃	d ₄	h ₁	h ₂	h ₃ -	l ₂	l ₃ -	d ₂	l ₁	g
GN 99.2-10-M8-20-M	10	13.5	20	25	8	39.5	63	60	M8	20	70
GN 99.2-10-M8-20-N	10	13.5	20	25	8	39.5	63	60	M8	20	70
GN 99.2-10-M8-25-M	10	13.5	20	25	8	39.5	63	60	M8	25	71
GN 99.2-10-M8-25-N	10	13.5	20	25	8	39.5	63	60	M8	25	71
GN 99.2-10-M8-32-M	10	13.5	20	25	8	39.5	63	60	M8	32	73
GN 99.2-10-M8-32-N	10	13.5	20	25	8	39.5	63	60	M8	32	73
GN 99.2-10-M8-40-M	10	13.5	20	25	8	39.5	63	60	M8	40	75
GN 99.2-10-M8-40-N	10	13.5	20	25	8	39.5	63	60	M8	40	75
GN 99.2-10-M8-50-M	10	13.5	20	25	8	39.5	63	60	M8	50	81
GN 99.2-10-M8-50-N	10	13.5	20	25	8	39.5	63	60	M8	50	81
GN 99.2-10-M8-63-M	10	13.5	20	25	8	39.5	63	60	M8	63	85
GN 99.2-10-M8-63-N	10	13.5	20	25	8	39.5	63	60	M8	63	85
GN 99.2-13-M10-20-M	13	16	25	29	8	49.5	80	76	M10	20	137
GN 99.2-13-M10-20-N	13	16	25	29	8	49.5	80	76	M10	20	137
GN 99.2-13-M10-25-M	13	16	25	29	8	49.5	80	76	M10	25	139
GN 99.2-13-M10-25-N	13	16	25	29	8	49.5	80	76	M10	25	139
GN 99.2-13-M10-32-M	13	16	25	29	8	49.5	80	76	M10	32	143
GN 99.2-13-M10-32-N	13	16	25	29	8	49.5	80	76	M10	32	143
GN 99.2-13-M10-40-M	13	16	25	29	8	49.5	80	76	M10	40	147
GN 99.2-13-M10-40-N	13	16	25	29	8	49.5	80	76	M10	40	147
GN 99.2-13-M10-50-M	13	16	25	29	8	49.5	80	76	M10	50	153
GN 99.2-13-M10-50-N	13	16	25	29	8	49.5	80	76	M10	50	153
GN 99.2-13-M10-63-M	13	16	25	29	8	49.5	80	76	M10	63	159
GN 99.2-13-M10-63-N	13	16	25	29	8	49.5	80	76	M10	63	159
GN 99.2-16-M12-25-M	16	19	28	33.5	10.5	60.5	100	95	M12	25	220
GN 99.2-16-M12-25-N	16	19	28	33.5	10.5	60.5	100	95	M12	25	220
GN 99.2-16-M12-32-M	16	19	28	33.5	10.5	60.5	100	95	M12	32	226
GN 99.2-16-M12-32-N	16	19	28	33.5	10.5	60.5	100	95	M12	32	226
GN 99.2-16-M12-40-M	16	19	28	33.5	10.5	60.5	100	95	M12	40	232
GN 99.2-16-M12-40-N	16	19	28	33.5	10.5	60.5	100	95	M12	40	232
GN 99.2-16-M12-50-M	16	19	28	33.5	10.5	60.5	100	95	M12	50	238
GN 99.2-16-M12-50-N	16	19	28	33.5	10.5	60.5	100	95	M12	50	238
GN 99.2-16-M12-63-M	16	19	28	33.5	10.5	60.5	100	95	M12	63	247
GN 99.2-16-M12-63-N	16	19	28	33.5	10.5	60.5	100	95	M12	63	247
GN 99.2-16-M12-80-M	16	19	28	33.5	10.5	60.5	100	95	M12	80	250
GN 99.2-16-M12-80-N	16	19	28	33.5	10.5	60.5	100	95	M12	80	250



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE