


# I.126

## Handles

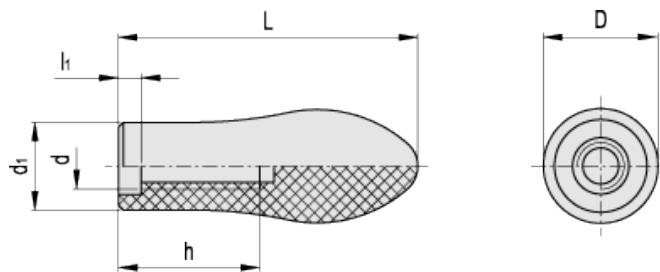

| Elesa Standards |               | Main dimensions |    |                | Mounting hole |    |                | Weight |
|-----------------|---------------|-----------------|----|----------------|---------------|----|----------------|--------|
| Code            | Description   | L               | D  | d <sub>1</sub> | d             | h  | l <sub>1</sub> | g      |
| 18201           | I.126/75-M8   | 75              | 28 | 22             | M8            | 30 | 7.5            | 40     |
| 18202           | I.126/75-M10  | 75              | 28 | 22             | M10           | 40 | 7.5            | 38     |
| 18401           | I.126/95-M12  | 95              | 33 | 25             | M12           | 58 | 8              | 67     |
| 18501           | I.126/110-M14 | 110             | 37 | 28             | M14           | 70 | 4              | 109    |

### Material

Phenolic based (PF) Duroplast. Resistant to solvents, oils, greases and other chemical agents.

### Colour

Black, glossy finish.

### Standard execution

Threaded blind hole.



STANDARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.