

## Cylindrical fixed handles

### Technopolymer

#### MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

#### MOUNTING

Blind hole.


The elastic coupling, by press-fit assembly on h9 tolerance drawn stock bars, is not affected by vibrations and prevents the handle from slipping off (see Technical data on page ).

#### ASSEMBLY INSTRUCTIONS

Fit the handle onto slight chamfered shaft end and push as far as possible by hand or by means of a small press. Alternatively it is possible to tap the handle with a plastic or wooden mallet until firmly in place. In this case we strongly recommend to use a cloth or other suitable soft material over the product to avoid any surface damage.



ELESA Original design

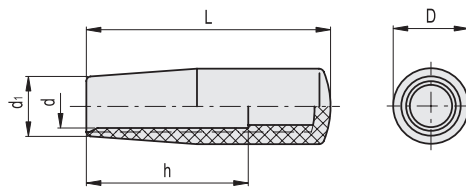

Code	Description	D	L	d	di	h	△
124601	I.780/40-N8-C9	18	40	8	15	28	8
124611	I.780/50-N10-C9	21	50	10	17	35	10
124621	I.780/56-N10-C9	22	56	10	18	40	14
124631	I.780/65-N10-C9	24.5	65	10	20.5	45	17
124636	I.780/65-N12-C9	24.5	65	12	20.5	45	16
124804	I.780/80-N12-C9	26.5	80	12	21	50	25
124646	I.780/80-N14-C9	26.5	80	14	21	50	24
124651	I.780/90-N15-C9	28.5	90	15	22.5	60	33
124656	I.780/90-N16-C9	28.5	90	16	22.5	60	32
124661	I.780/100-N16-C9	31	100	16	25	60	36