


IR.302

Fold-away handles



ELESA Original design

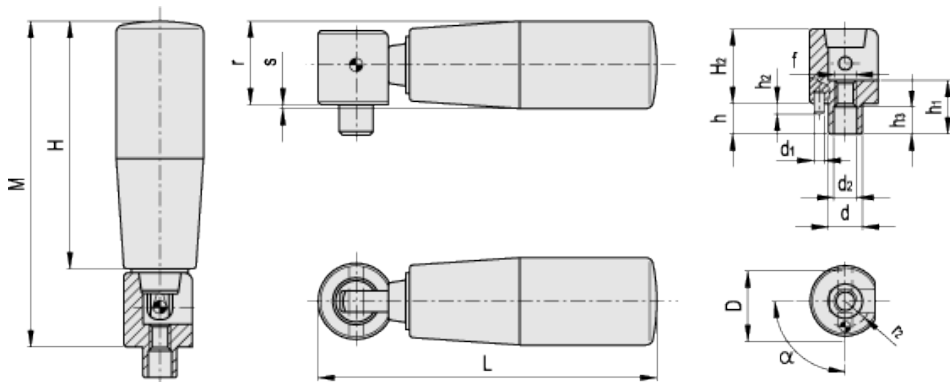

Elesa Standards		Main dimensions										Mounting hole				Dowel				Weight
Code	Description	H	L	M	D	d _{−0.1}	H ₂	h	r	s	f	d ₂	h ₁	h ₃	d ₁	h _{2−0.2}	r ₂	α	g	
27501	IR.302/56	56	74	71	16	7	15	4	19	2.5	M4	-	9	-	3	3	5.5	90°	72	
27601	IR.302/65	65	89	85	20	9	19.5	8	22	1	M6	6.2	14	7	3	3	7	90°	115	
27701	IR.302/80	80	104	100	20	9	19.5	8	24	2.5	M6	6.2	14	7	3	3	7	90°	135	
27801	IR.302/90	90	118	113	26	13.4	23	7.5	27	1	M6	-	14.5	-	3	3	9.5	90°	215	


Material
Phenolic based (PF) Duroplast handle. Resistant to solvents, oils, greases and other chemical agents.

Colour
Black, glossy finish.

Standard execution
Black-oxide steel double guide stud, sintered and oxidised steel base with guide stud, black-oxide steel screw.

Features and applications
Handle pivots freely during operation: a system of coaxial bushings compensates return spring load.
This series of fold-away handles has been designed for all those applications for which, owing to lack of space or for safety reasons, the handle must be folded-away once the operation has been completed.

Normal assembly example
with protruding base



STANDARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.