


IR.302-SST

Fold-away handles



ELESA Original design

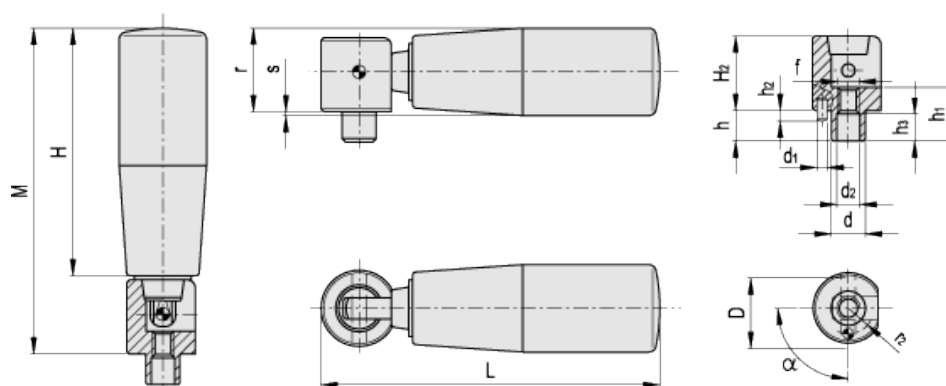

Elesa Standards		Main dimensions										Mounting hole				Dowel				Weight
Code	Description	H	L	M	D	d _{-0.1}	H ₂	h	r	s	f	d ₂	h ₁	h ₃	d ₁	h ₂ -0.2	r ₂	α	g	
27511	IR.302/56-SST	56	74	71	16	7	15	4	19	2.5	M4	-	9	-	3	3	5.5	90°	72	
27611	IR.302/65-SST	65	89	85	20	9	19.5	8	22	1	M6	6.2	14	7	3	3	7	90°	115	
27711	IR.302/80-SST	80	104	100	20	9	19.5	8	24	2.5	M6	6.2	14	7	3	3	7	90°	135	
27811	IR.302/90-SST	90	118	113	26	13.4	23	7.5	27	1	M6	-	14.5	-	3	3	9.5	90°	215	

Material

Phenolic based (PF) Duroplast handle. Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, glossy finish.

Standard execution


AISI 303 stainless steel double guide stud, sintered AISI 303 stainless steel base with guide stud, AISI 303 stainless steel screw.

Features and applications

Handle pivots freely during operation: a system of coaxial bushings compensates return spring load.

This series of fold-away handles has been designed for all those applications for which, owing to lack of space or for safety reasons, the handle must be folded-away once the operation has been completed.

Normal assembly example
with protruding base



STANDARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.