


IR.407

Fold-away handles



ELESA Original design

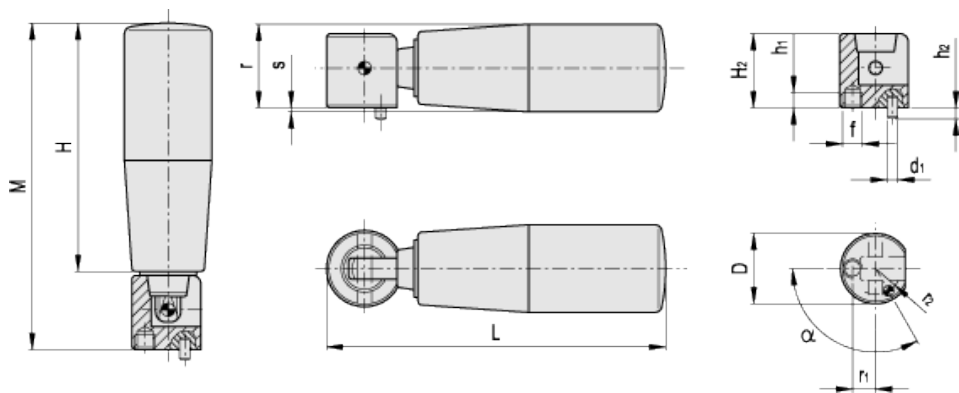

Elesa Standards		Main dimensions								Mounting hole		Dowel					Weight
Code	Description	H	L	M	D	H ₂	r	r ₁	s	f	h ₁	d ₁	h ₂ ^{-0.2}	r ₂	α	g	
27901	IR.407/56	56	74	71	16	15	19	1	2.5	M4	5	3	3	5.5	90°	70	
28001	IR.407/65	65	89	85	20	19.5	22	6	1	M6	6	3	3	7	120°	108	
28101	IR.407/80	80	104	100	20	19.5	23	6	2.5	M6	6	3	3	7	120°	127	
28201	IR.407/90	90	118	110	26	19.5	23	9	4	M6	10	3	3	9	120°	192	


Material
Phenolic based (PF) Duroplast handle. Resistant to solvents, oils, greases and other chemical agents.

Colour
Black, glossy finish.

Standard execution
Black-oxide steel double guide stud, sintered and oxidised steel flat base for embedded mounting, black-oxide steel screw.

Features and applications
Handle pivots freely during operation: a system of coaxial bushings compensates return spring load.
This series of fold-away handles has been designed for all those applications for which, owing to lack of space or for safety reasons, the handle must be folded-away once the operation has been completed.

Normal assembly example
with embedded base



STANDARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.