


IR.407-SST

Fold-away handles



ELESA Original design

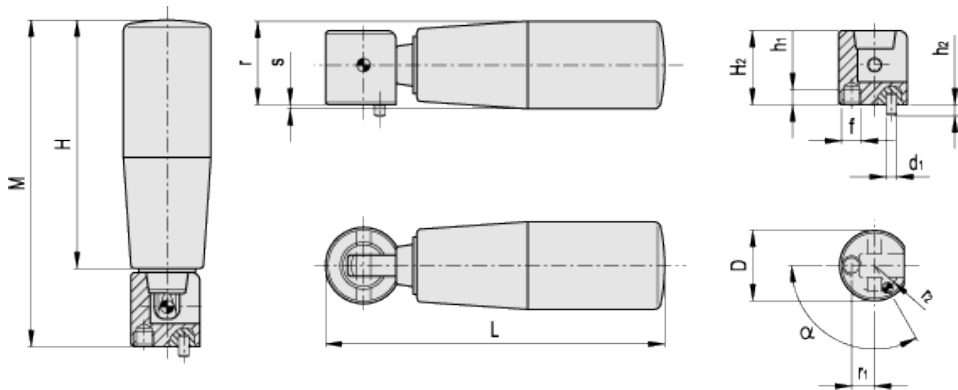

Elesa Standards		Main dimensions								Mounting hole		Dowel					Weight
Code	Description	H	L	M	D	H ₂	r	r ₁	s	f	h ₁	d ₁	h ₂ ^{-0.2}	r ₂	α	g	
28011	IR.407/65-SST	65	89	85	20	19.5	22	6	1	M6	6	3	3	7	120°	108	
28111	IR.407/80-SST	80	104	100	20	19.5	23	6	2.5	M6	6	3	3	7	120°	127	
28211	IR.407/90-SST	90	118	110	26	19.5	23	9	4	M6	10	3	3	9	120°	192	

Material
Phenolic based (PF) Duroplast handle. Resistant to solvents, oils, greases and other chemical agents.

Colour
Black, glossy finish.

Standard execution
AISI 303 stainless steel double guide stud, sintered AISI 303 stainless steel flat base for embedded mounting, AISI 303 stainless steel screw.

Features and applications
Handle pivots freely during operation: a system of coaxial bushings compensates return spring load.
This series of fold-away handles has been designed for all those applications for which, owing to lack of space or for safety reasons, the handle must be folded-away once the operation has been completed.

**Normal assembly example
with embedded base**

