

Levelling feet for ground mounting

Polypropylene base, stainless steel stem

BASE

High-resilience polypropylene based (PP) technopolymer, black colour, matte finish.

ARTICULATED STEM

Threaded AISI 304 stainless steel with regulation hexagon.

STANDARD EXECUTIONS

- **LV.F-PP-SST**: without no-slip disk.
- **LV.F-PP-AS-SST**: with EPDM rubber no-slip disk, hardness 70 Shore A, supplied assembled to the base.

GROUND MOUNTING

By means of two holes at 180°, supplied covered by a diaphragm (which can be easily removed by a metal tool), to avoid all unhealthy deposits of dirt and dust when the ground mounting is not required (see Fig.1).

FEATURES AND APPLICATIONS

Polypropylene levelling elements are particularly suitable for those sectors where they can be in contact with chemical agents and/or for frequent washing with acidic or basic detergent solutions, such as in the chemical, process, pharmaceutical, food, textile and paper industry.

The special knurling under the lower lip of the base provides excellent stability and grip when using the levelling element without no-slip disk even on surfaces that are not perfectly flat.

The particular assembling system of the no-slip disk to the base assures a perfect anchoring, preventing separation even in case of impact during transport or of adhesion (sticking) to the floor (see No-slip disks on page -).

ORDER INFORMATION

The levelling elements are supplied unassembled to make carriage and storage easier. The components (base and stem) are supplied in separate packing: less volume taken and better protection from scratches and dirt.

To order bases and stems separately, see:

- table of possible combinations Bases/Stems (see page

ACCESSORIES ON REQUEST

AISI 304 stainless steel nut (see Nuts NT. on page).



ELESA Original design





Fig.1

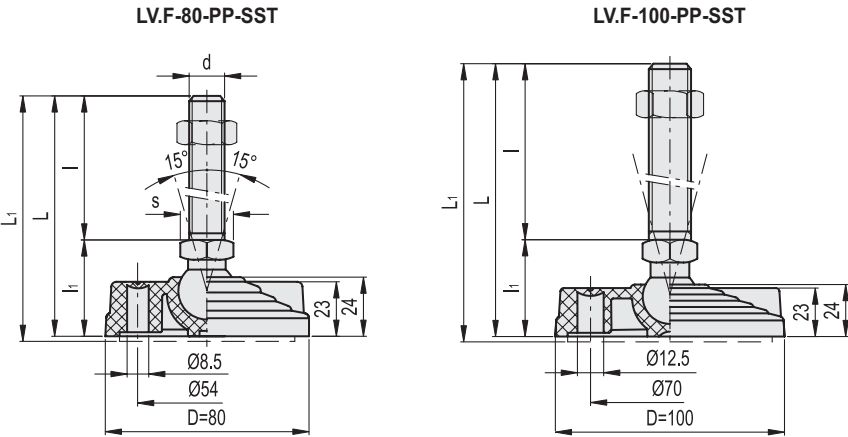

LV.F-PP-SST - LV.F-PP-AS-SST

STAINLESS STEEL

Code	Description	Code	Description	D	d	L	L1#	I	li	s	Articu- lation [N]* [N]**	Δ	#
390621	LV.F-80-PP-24-SST-M16x58	393621	LV.F-80-PP-24-AS-SST-M16x58	80	M16	101	104	58	43	24	24	4000 18000	230 256
390625	LV.F-80-PP-24-SST-M16x98	393625	LV.F-80-PP-24-AS-SST-M16x98	80	M16	141	144	98	43	24	24	4000 18000	282 308
390641	LV.F-80-PP-24-SST-M16x138	393641	LV.F-80-PP-24-AS-SST-M16x138	80	M16	181	184	138	43	24	24	4000 18000	333 359
390661	LV.F-80-PP-24-SST-M16x158	393661	LV.F-80-PP-24-AS-SST-M16x158	80	M16	201	204	158	43	24	24	4000 18000	361 387
390725	LV.F-80-PP-24-SST-M20x98	393725	LV.F-80-PP-24-AS-SST-M20x98	80	M20	141	144	98	43	24	24	4000 18000	354 380
390741	LV.F-80-PP-24-SST-M20x138	393741	LV.F-80-PP-24-AS-SST-M20x138	80	M20	181	184	138	43	24	24	4000 18000	434 460
390761	LV.F-80-PP-24-SST-M20x158	393761	LV.F-80-PP-24-AS-SST-M20x158	80	M20	201	204	158	43	24	24	4000 18000	474 500
390781	LV.F-80-PP-24-SST-M20x198	393781	LV.F-80-PP-24-AS-SST-M20x198	80	M20	241	244	198	43	24	24	4000 18000	559 585
390825	LV.F-80-PP-24-SST-M24x98	393825	LV.F-80-PP-24-AS-SST-M24x98	80	M24	141	144	98	43	24	24	4000 18000	454 480
390861	LV.F-80-PP-24-SST-M24x158	393861	LV.F-80-PP-24-AS-SST-M24x158	80	M24	201	204	158	43	24	24	4000 18000	629 655
390881	LV.F-80-PP-24-SST-M24x198	393881	LV.F-80-PP-24-AS-SST-M24x198	80	M24	241	244	198	43	24	24	4000 18000	750 776
391521	LV.F-100-PP-24-SST-M16x58	394521	LV.F-100-PP-24-AS-SST-M16x58	100	M16	101	104	58	43	24	24	5000 18500	260 314
391525	LV.F-100-PP-24-SST-M16x98	394525	LV.F-100-PP-24-AS-SST-M16x98	100	M16	141	144	98	43	24	24	5000 18500	312 366
391541	LV.F-100-PP-24-SST-M16x138	394541	LV.F-100-PP-24-AS-SST-M16x138	100	M16	181	184	138	43	24	24	5000 18500	363 417
391561	LV.F-100-PP-24-SST-M16x158	394561	LV.F-100-PP-24-AS-SST-M16x158	100	M16	201	204	158	43	24	24	5000 18500	391 445
391625	LV.F-100-PP-24-SST-M20x98	394625	LV.F-100-PP-24-AS-SST-M20x98	100	M20	141	144	98	43	24	24	5000 18500	384 438
391641	LV.F-100-PP-24-SST-M20x138	394641	LV.F-100-PP-24-AS-SST-M20x138	100	M20	181	184	138	43	24	24	5000 18500	464 518
391661	LV.F-100-PP-24-SST-M20x158	394661	LV.F-100-PP-24-AS-SST-M20x158	100	M20	201	204	158	43	24	24	5000 18500	504 558
391681	LV.F-100-PP-24-SST-M20x198	394681	LV.F-100-PP-24-AS-SST-M20x198	100	M20	241	244	198	43	24	24	5000 18500	589 643
391725	LV.F-100-PP-24-SST-M24x98	394725	LV.F-100-PP-24-AS-SST-M24x98	100	M24	141	144	98	43	24	24	5000 18500	484 538
391761	LV.F-100-PP-24-SST-M24x158	394761	LV.F-100-PP-24-AS-SST-M24x158	100	M24	201	204	158	43	24	24	5000 18500	659 713
391781	LV.F-100-PP-24-SST-M24x198	394781	LV.F-100-PP-24-AS-SST-M24x198	100	M24	241	244	198	43	24	24	5000 18500	780 834

* Max static load: is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

** Load at breakage: is the value above which the load applied to the element may quickly cause some plastic material breakage, in particular conditions of use.

Data with no-slip disk mounted.