

Control knurled knobs

With pointer, Duroplast

MATERIAL


Phenolic based (PF) Duroplast, black colour, glossy finish.
White pad-printed index line, placed at 180° from the transverse pressure screw.

STANDARD EXECUTION

Plain blind hole, fixing by means of a transverse pressure screw according to UNI 5929-85 in AISI 304 stainless steel (headless screw with hexagonal socket and cupped end) which screws into the AISI 304 stainless steel nut. Supplied.



ELESA Original design

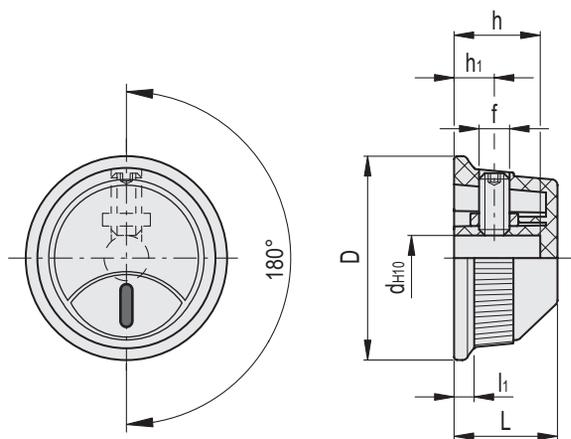

Code	Description	D	dH10	L	li	h	h1	f	
66851	MI.404/35 N-6	35	6	18	3,5	15	7	M5	11
66853	MI.404/40 N-8	40	8	20,5	4	17,5	7	M5	17
66855	MI.404/45 N-8	45	8	23	5	15	10	M5	19