

Mini vacuum cup suspensions - Fixed

Threaded connection female, steel, aluminium and brass

MATERIAL

Threaded sleeve and hexagonal nut in nickel-plated brass.
Quick fitting in blue anodised aluminium.

STANDARD EXECUTIONS

- **VPF-F**: with straight quick fitting.
- **VPF-F-L**: with L-shaped quick fitting.


FEATURES

The VPF vacuum cup suspensions are threaded bushings, with hexagonal tightening nuts for height adjustment and for mounting them on the automation device.

The threaded sleeve is used for fixing the vacuum cup with support; on the opposite side there is the quick fitting for connecting the suction hose.


Compatible with 4x6 diameter plastic tube.

See Technical Data for vacuum cups (on page -).

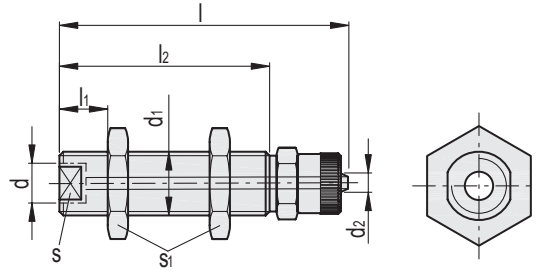

VPF-F

Code	Description	d	d1	d2*	l	l1	l2	s	s1	Δ
VV.44001	VPF-70-01-M5-F	M5	G1/8	4	46	6	30	8	12	19
VV.44003	VPF-70-05-M5-F	M5	M12x1.25	4	46	6	30	10	19	45

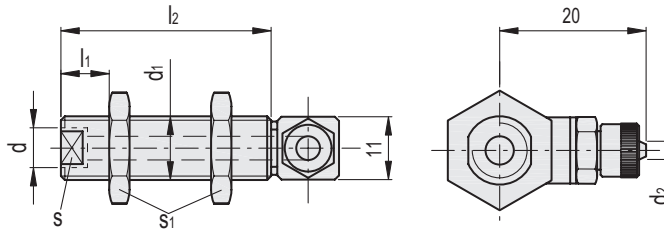

VPF-F-L

Code	Description	d	d1	d2*	l1	l2	s	s1	Δ
VV.44002	VPF-70-01-M5-F-L	M5	G1/8	4	6	30	8	12	24
VV.44004	VPF-70-05-M5-F-L	M5	M12x1.25	4	6	30	10	19	50

* Compatible with compressed air tubes of the diameter in the table.