
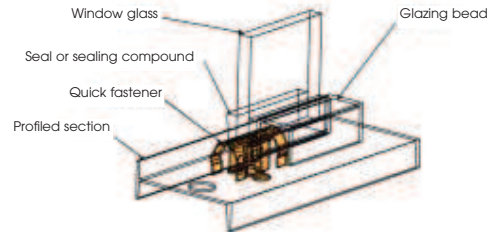




SPECIAL FASTENERS

Clips for glazing beads

Recommended use:
For fixing profiled glazing beads.

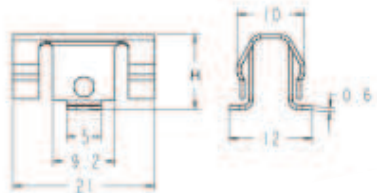

P = PANEL THICKNESS	REFERENCE	H
2	C 464020 ZE	14.6
3	C 464030 ZE	12.6
4	C 464040 ZE	13.6

Recommended assembly method:
Fit the fastener to the substrate and then clip on the glazing bead.

CLIP	
MATERIAL	Treated spring steel
SURFACE TREATMENT	See table on cover flap
COLOUR	See table on cover flap

SPECIAL FASTENERS



Snap-fit earth continuity lugs

Recommended use:
These blade-type lugs are designed to provide efficient, simple and rapid grounding continuity for electrical appliances. The lugs are pinched onto an edge of a metal panel. Then the cable terminals are clipped to the connecting blades. On assembly, the lugs locally remove the paint, thereby ensuring electrical continuity. These lugs are used on a wide variety of electrical appliances, lighting equipment etc.



TYPE 1

TYPE 2



Shape a

Shape b

TERMINAL	P = PANEL THICKNESS	e	REFERENCE	A	B	B1	TYPE	SHAPE
6.35	0.5 to 0.9	0.5	C 27951635 ZB	8.3	6.2	6.2	1	b
6.35	0.5 to 0.9	0.5	C 27251635 ZB	8.3	6.2	6.2	1	a
6.35	1 to 1.4	0.5	C 27252635 ZB	8.1	6.2	6.2	1	a
6.35	1.5 to 2	0.5	C 27253635 ZB	8	6.2	6.2	1	a
6.35	0.5 to 0.9	0.8	C 28831635 ZB	9.5	8	4	2	
6.35	1 to 1.4	0.8	C 28832635 ZB	9.3	8	4	2	
6.35	1.5 to 2	0.8	C 28833635 ZB	9.1	8	4	2	

Recommended assembly method:

1. Install the lug on the panel by hand or with the aid of a simple tool.
2. Make the electrical connection.



FASTENER	
MATERIAL	Treated spring steel
SURFACE TREATMENT	See table on cover flap
COLOUR	See table on cover flap