

RIVETTI STRUTTURALI ACCIAIO INOX 304 / ACCIAIO INOX 304 T. TONDA


STRUCTURAL BLIND RIVETS STAINLESS STEEL 304 / STAINLESS STEEL 304 DOME HEAD

MFX-TT IX


- Elevata resistenza alle vibrazioni e buona tenuta ermetica
- High resistance to vibrations and good seal




02F3B - p. 45

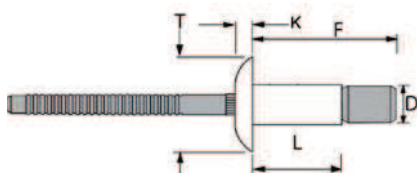

D	L	T	K	F	Ø		CODICE code		
+0,2/-0,15	+1/-0,2	max	max	max	foro/hole				
4,8	10	10,2	2,5	21,4	5,1 - 5,2	1,6 - 6,4	01MFX4810TTIX	4400 N	5780 N
	14			26,2		1,6 - 11,1	01MFX4814TTIX		
6,4	14	13,5	3,2	30	6,7 - 7,0	2 - 9,5	01MFX6414TTIX	8220 N	10670 N
	20			36,4		2 - 15,5	01MFX6420TTIX		
7,8	21	16	3,5	39	8,1 - 8,3	5 - 15	01MFX7821TTIX	10790 N	15900 N

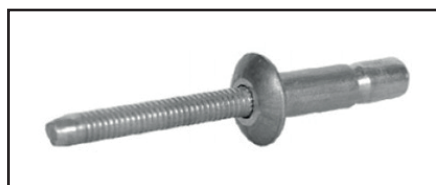

- DA UTILIZZARE CON UGELLO STANDARD
- TO BE USED WITH STANDARD NOSE PIECE



RIVETTI STRUTTURALI ACCIAIO INOX 304 / ACCIAIO INOX 304 T. SVASATA


STRUCTURAL BLIND RIVETS STAINLESS STEEL 304 / STAINLESS STEEL 304 COUNTERSUNK HEAD

MFX-TS IX

- Elevata resistenza alle vibrazioni e buona tenuta ermetica
- High resistance to vibrations and good seal



02F3B - p. 45

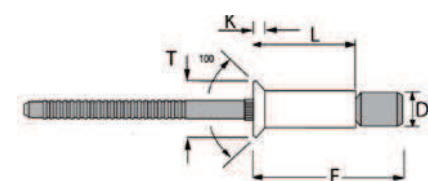

D	L	T	K	F	Ø		CODICE code		
					foro/hole				
4,8	12	9,0	2,0	20	5,1 - 5,2	3,6 - 7,9	01MFX4813TSIX	4500 N	6000 N
	16			26,5		3,6 - 12,7	01MFX4817TSIX		
6,4	16	11,0	2,2	28	6,7 - 7,0	5 - 12,0	01MFX6416TSIX	8200 N	10500 N
	22			30		5 - 17,5	01MFX6422TSIX		



- DA UTILIZZARE CON UGELLO STANDARD
- TO BE USED WITH STANDARD NOSE PIECE

