

"Stay Connected" with



Liquid Tight Cordgrips

a PennEngineering® Company

NO O-RING
REQUIRED!



Heyco® -Tite Liquid Tight Cordgrips



Straight-Thru, NPT Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters. Cable ranges listed are for the maximum IP68 sealing range. Contact Heyco for UL approved 514B cable ranges.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.730" (44,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 3-47.
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION	UL or ENEC	PART DIMENSIONS									
Minimum		Maximum		Black	Gray			A		B		C		D		E	
in.	mm.	in.	mm.					Clearance Hole Dia.		Max. O.A. Length		Thread Length		Wrenching Thk.		Wrenching Nut Flat Size	
.065	1,7	.210	5,3	M4514	M4515	RLTCG 1/4	UL	.540	13,7	1.29	32,8	.45	11,4	.21	5,3	.63	16,0
.115	2,9	.250	6,4	M4516	M4517	LTCG 1/4	UL	.680	17,3	1.41	35,8	.49	12,4	.21	5,3	.82	20,8
.065	1,7	.230	5,8	M3458	M3459	RLTCG 3/8	UL	.680	17,3	1.41	35,8	.49	12,4	.21	5,3	.82	20,8
.105	2,7	.315	8,0	M3228	M3229	LTCG 3/8	UL	.875	22,2	1.70	43,2	.61	15,5	.21	5,3	.98	24,9
.095	2,4	.290	7,4	M4518	M4519	RLTCG 1/2	UL	.875	22,2	1.68	42,7	.44	11,2	.25	6,4	1.06	26,9
.170	4,3	.450	11,4	M3231	M3232	LTCG 1/2	UL	.875	22,2	1.68	42,7	.44	11,2	.25	6,4	1.06	26,9
.180	4,6	.400	10,2	M4520	M4521	RLTCG LL 1/2	UL	.875	22,2	1.68	42,7	.44	11,2	.25	6,4	1.06	26,9
.260	6,6	.545	13,8	M3200	M3201	LTCG LL 1/2	UL	.875	22,2	1.68	42,7	.44	11,2	.25	6,4	1.06	26,9
.250	6,4	.490	12,4	M3460	M3461	RLTCG 3/4	UL	1.040	26,4	2.00	50,8	.62	15,7	.25	6,4	1.30	33,0
.420	10,7	.630	16,0	M3234GA	M3235GA	LTCG 3/4	UL	1.040	26,4	2.00	50,8	.62	15,7	.25	6,4	1.30	33,0
.435	11,0	.705	17,9	M3234	M3235	LTCG 3/4	UL	1.040	26,4	2.00	50,8	.62	15,7	.25	6,4	1.30	33,0
.490	12,4	.785	19,9	M8439	M8440	RLTCG 1	UL	1.326	33,7	2.41	61,2	.76	19,3	.30	7,6	1.73	43,9
.590	15,0	1.000	25,4	M8437	M8438	LTCG 1	UL	1.326	33,7	2.41	61,2	.76	19,3	.30	7,6	1.73	43,9
.787	20,0	1.020	25,9	M4522	M4523	RLTCG 1-1/4	UL	1.680	42,7	2.69	68,3	.78	19,8	.30	7,6	2.05	52,1
.865	22,0	1.260	32,0	M4524	M4525	LTCG 1-1/4	UL	1.680	42,7	2.69	68,3	.78	19,8	.30	7,6	2.05	52,1
1.000	25,4	1.240	31,5	M3319	M3320	RLTCG 1-1/2	UL	1.920	48,8	2.81	71,3	.77	19,6	.36	9,1	2.46	62,5
1.230	31,2	1.560	39,6	M3317	M3318	LTCG 1-1/2	UL	1.920	48,8	2.81	71,3	.77	19,6	.36	9,1	2.46	62,5
1.160	29,5	1.350	34,3	M3323	M3324	RLTCG 2	UL	2.400	60,8	2.93	74,3	.79	20,1	.42	10,7	2.73	69,3
1.450	36,8	1.730	43,9	M3321	M3322	LTCG 2	UL	2.400	60,8	2.93	74,3	.79	20,1	.42	10,7	2.73	69,3

Standard colors black and gray.

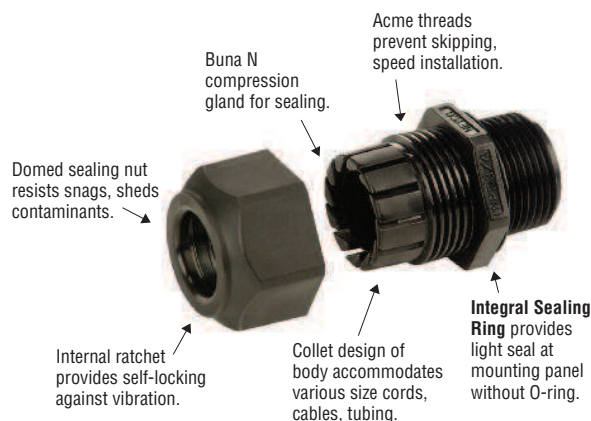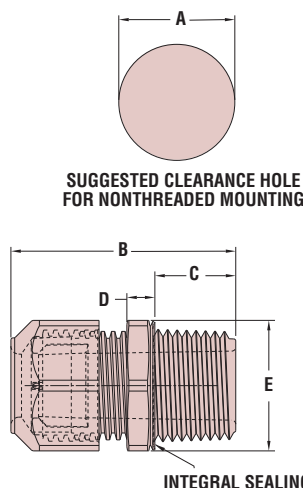

Quick
Specs

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	- UL Listed under Underwriters' Laboratories File E51579 - Recognized under the Component Program of Underwriters' Laboratories File E51579 - CS Certified By Canadian Standard Association File 93876C
Flammability Rating	Approved for NEMA 4, 4X, 6 and 6P Applications
Temperature Range	94V-2—Consult factory for V0 material
	Static -40°F (-40°C) to 239°F (115°C)
	Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)



Heyco®-Tite Liquid Tight Cordgrips

Straight-Thru, PG* Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters. Cable ranges listed are for the maximum IP68 sealing range. Contact Heyco for UL approved 514B cable ranges.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.730" (44,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.


CABLE DIA. RANGE				PART NO.			DESCRIPTION		PART DIMENSIONS							
Minimum		Maximum		Including Nylon Nut** Black Gray		No Nut Black ††			A Clearance Hole Dia.	B Max. O.A. Length	C Thread Length	E Wrenching Nut Flats				
in.	mm.	in.	mm.						in.	mm.	in.	mm.	in.	mm.		
Standard Thread																
.065	1,7	.210	5,3	M3444	M3445	M4754	RLTCG 7		.492	12,5	1.16	29,5	.32	8,1	.63	16,0
.115	2,9	.250	6,4	M3207	M3208	M4752	LTCG 7									
.065	1,7	.230	5,8	M3446	M3447	M4758	RLTCG 9		.599	15,2	1.25	31,8	.32	8,1	.82	20,8
.105	2,7	.315	8,0	M3210	M3211	M4756	LTCG 9									
.069	1,8	.260	6,6	M3448	M3449	M4762	RLTCG 11		.733	18,6	1.48	37,6	.38	9,7	.94	23,9
.230	5,8	.400	10,2	M3213	M3214	M4760	LTCG 11									
.095	2,4	.290	7,4	M4500	M4501	M4506	RLTCG 13.5		.804	20,4	1.53	38,9	.41	10,4	.98	24,9
.170	4,3	.450	11,4	M3216	M3217	M4764	LTCG 13.5									
.180	4,6	.400	10,2	M4502	M4503	M4508	RLTCG 16		.886	22,5	1.68	42,7	.44	11,2	1.06	26,9
.260	6,6	.545	13,8	M3219	M3220	M4766	LTCG 16									
.250	6,4	.490	12,4	M3454	M3455	M4748	RLTCG 21									
.420	10,7	.630	16,0	M3222GA	M3223GA	-	LTCG 21		1.12	28,3	1.89	48,0	.52	13,2	1.30	33,0
.435	11,0	.705	17,9	M3222	M3223	M4768										
.490	12,4	.785	19,9	M4504	M4505	M4512	RLTCG 29		1.470	37,3	2.23	56,6	.57	14,5	1.73	43,9
.590	15,0	1.000	25,4	M3225	M3226	M4770	LTCG 29									
.787	20,0	1.020	25,9	M3206	M3205	M4772	RLTCG 36		1.88	47,6	2.39	60,7	.47	11,9	2.05	52,7
.875	22,2	1.260	32,0	M3204	M3203	M4774	LTCG 36									
1.000	25,4	1.240	31,5	M3218	M3215	M4740	RLTCG 42		2.130	54,1	2.50	63,5	.48	12,2	2.46	62,5
1.230	31,2	1.560	39,6	M3212	M3209	M4742	LTCG 42									
1.160	29,5	1.350	34,3	M3283	M3284	M4744	RLTCG 48		2.340	59,4	2.63	66,7	.50	12,7	2.73	69,3
1.450	36,8	1.730	43,9	M3281	M3282	M4776	LTCG 48									
Short Thread																
.069	1,8	.260	6,6	M3448ST	M3449ST	-	RLTCG 11 ST		.733	18,6	1.41	35,8	.31	7,9	.94	23,9
.230	5,8	.400	10,2	-	-	M3213ST	LTCG 11 ST									
.250	6,4	.490	12,4	M3454ST	M3455ST	-	RLTCG 21 ST		1.115	28,3	1.80	45,7	.43	10,9	1.30	33,0
.435	11,0	.705	17,9	M3222ST	M3223ST	-	LTCG 21 ST									

Standard colors black and gray.


*Steel conduit threads per DIN 40430, see page 3-57

**Nylon locknuts shipped unassembled

††For No Nut Part Nos. in gray color please visit our Cordgrip product section at heyco.com



**SUGGESTED CLEARANCE HOLE
FOR NONTHREADED MOUNTING**

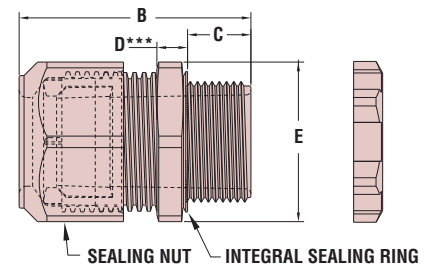

***Consult Heyco for Wrenching Nut Thickness "D"

*Quick
Specs*

Material
Certifications

- Nylon 6/6 w/Buna N or TPE Sealing Gland
- UL Listed under Underwriters' Laboratories File E51579
- Recognized under the Component Program of Underwriters' Laboratories File E51579

Flammability Rating
Temperature Range

- SR Certified by Canadian Standard Association File 93876C
- Approved for NEMA 4, 4X, 6 and 6P Applications
- 94V-2
- Static -40°F (-40°C) to 239°F (115°C)
- Dynamic -4°F (-20°C) to 212°F (100°C)
- IP 68 (70 PSI, 5 BAR)

IP Rating

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

**NO O-RING
REQUIRED!**

Heyco® -Tite Liquid Tight Cordgrips

Straight-Thru, Metric Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection




CABLE DIA. RANGE				PART NO.			DESCRIPTION	UL or IEC	PART DIMENSIONS							
Minimum		Maximum		Including Nylon Nut* Black Gray		No Nut Black ††			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		E Wrenching Nut Flats	
in.	mm.	in.	mm.						in.	mm.	in.	mm.	in.	mm.	in.	mm.
.065	1,7	.210	5,3	M4330	M4331	M4362	RLTCG M12	UL	.473	12,0	1.16	29,5	.32	8,1	.63	16,0
.115	2,9	.250	6,4	M4332	M4333	M4364	LTCG M12		.630	16,0	1.25	31,8	.32	8,1	.82	20,8
.065	1,7	.230	5,8	M4334	M4335	M4366	RLTCG M16	UL	.787	20,0	1.53	38,9	.41	10,4	.98	24,9
.105	2,7	.315	8,0	M4336	M4337	M4368	LTCG M16		.985	25,0	1.89	48,0	.52	13,2	1.30	33,0
.095	2,4	.290	7,4	M4338	M4339	M4370	RLTCG M20	UL	1.260	32,0	2.23	56,6	.57	14,5	1.73	43,9
.170	4,3	.450	11,4	M4340	M4341	M4372	LTCG M20		1.575	40,0	2.39	60,7	.47	11,9	2.05	52,7
.260	6,6	.545	13,8	M3198	M3199	M4360	LTCG LL M20	UL	1.970	50,0	2.50	63,5	.48	12,2	2.46	62,5
.250	6,4	.490	12,4	M4342	M4343	M4374	RLTCG M25		2.480	63,0	2.63	66,7	.50	12,7	2.73	69,3
.435	11,0	.705	17,9	M4344	M4345	M4376	LTCG M25	UL								
.490	12,4	.785	19,9	M4346	M4347	M4378	RLTCG M32									
.590	15,0	1.000	25,4	M4348	M4349	M4380	LTCG M32	UL								
.787	20,0	1.020	25,9	M4350	M4351	M4382	RLTCG M40									
.865	22,0	1.260	32,0	M4352	M4353	M4384	LTCG M40	UL								
1.000	25,4	1.240	31,5	M3302	M3303	-	RLTCG M50									
1.230	31,2	1.560	39,6	M3300	M3301	-	LTCG M50	UL								
1.160	29,5	1.350	34,3	M3306	M3307	-	RLTCG M63									
1.450	36,8	1.730	43,9	M3304	M3305	-	LTCG M63	UL								

Standard colors black and gray.

*Nylon locknuts shipped unassembled

††For No Nut Part Nos. in gray color please visit our Cordgrip product section at heyco.com



Domed sealing nut
resists snags, sheds
contaminants.

Internal ratchet
provides self-locking
against vibration.

Buna N
compression
gland for sealing.

Acme threads
prevent skipping,
speed installation.

Collet design of
body accommodates
various size cords,
cables, tubing.

Integral Sealing
Ring provides
light seal at
mounting panel
without O-ring.

**Consult Heyco for Wrenching Nut Thickness “D”

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters. Cable ranges listed are for the maximum IP68 sealing range. Contact Heyco for UL approved 514B cable ranges.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065” (1,7 mm) to 1.730” (44,0 mm).
- We recommend using the cordgrip with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.

Material
Certifications

- UL Nylon 6/6 with Buna N or TPE Sealing Gland
- UL Listed under Underwriters’ Laboratories File E51579
- UL Recognized under the Component Program of Underwriters’ Laboratories File E51579
- CSA Certified by Canadian Standards Association File 93876C
- CSA Approved for NEMA 4, 4X, 6 and 6P Applications
- CE Marks License #40010390
- CE Per EC Low Voltage Directive 73/23/EEC

Flammability Rating
Temperature Range

94V-2
Static -40°F (-40°C) to 239°F (115°C)
Dynamic -4°F (-20°C) to 212°F (100°C)

IP Rating

IP 68 (70 PSI, 5 BAR)

*Quick
Specs*

"Stay Connected" with



Liquid Tight Cordgrips

a PennEngineering® Company



Heyco® -Tite Liquid Tight Cordgrips

Multi-Hole with Integral Sealing Ring

Sequenced by Conductor Size

The Ultimate in Liquid Tight Strain Relief Protection

**NO O-RING
REQUIRED!**

- Heyco® **Multi-hole glands** provide the widest range of conductor through-hole size and number configurations, many of which are agency approved. See the tabular charts for specific approvals for specific parts. These approvals are not "global" or implied approvals; they are both real and part specific.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- IP 68 rated.
- Cordgrips are made of nylon construction with TPE sealing glands that resist salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- For body part dimensions see page 3-1, 3-3, and 3-4.
- Multi-hole glands are only to be used with Heyco Liquid Tight Cordgrips and are not sold separately.
- Consult Heyco for Cordgrips molded in other colors.


CONDUCTORS		 or 	NPT HUB*		PG HUB**		METRIC HUB**	
Hole Size mm.	No.		specifications on page 3-1		specifications on page 3-3		specifications on page 3-4	
			Black Part No.	Desc.	Black Part No.	Desc.	Black Part No.	Desc.
Round, Open Holes – consult Heyco for Snap-in-2 Hub versions								
1,4	4		M3228GAP	LTCG 3/8	M3210GAP	LTCG 9	M4336GAP	LTCG M16
	6		M3228GAZ	LTCG 3/8	M3210GAZ	LTCG 9	M4336GAZ	LTCG M16
	10		M3228GE	LTCG 3/8	M3210GE	LTCG 9	M4336GE	LTCG M16
1,5	2		M4516GGBA	LTCG 1/4	M3207GBA	LTCG 7	M4332GBA	LTCG M12
	3		—	—	M3213GF	LTCG 11	—	—
1,6	5		M3228GG	LTCG 3/8	M3210GG	LTCG 9	M4336GG	LTCG M16
1,7	2		M3228GH	LTCG 3/8	M3210GH	LTCG 9	M4336GH	LTCG M16
	3		M3228GJ	LTCG 3/8	M3210GJ	LTCG 9	M4336GJ	LTCG M16
	4		M3228GK	LTCG 3/8	M3210GK	LTCG 9	M4336GK	LTCG M16
2,0	3		M3231GL	LTCG 1/2	M3216GL	LTCG 13	M4340GL	LTCG M20
2,3	4		M3228GM	LTCG 3/8	M3210GM	LTCG 9	M4336GM	LTCG M16
2,5	2		M3231GN	LTCG 1/2	M3216GN	LTCG 13	M4340GN	LTCG M20
2,8	4		—	—	M3213GAY	LTCG 11	—	—
3,0	2		M3228GP	LTCG 3/8	M3210GP	LTCG 9	M4336GP	LTCG M16
			—	—	M3213GB	LTCG 11***	—	—
			—	—	M3213GP	LTCG 11	—	—
	3		—	—	M3213GQ	LTCG 11	—	—
			M3231GQ	LTCG 1/2	M3216GQ	LTCG 13	M4340GQ	LTCG M20
	4		M3200GQ	LTCG LL 1/2	M3219GQ	LTCG 16	—	—
			M3200GR	LTCG LL 1/2	M3219GR	LTCG 16	—	—
6		M3231GS	LTCG 1/2	M3216GS	LTCG 13	M4340GS	LTCG M20	
		M3200GS	LTCG LL 1/2	M3219GS	LTCG 16	—	—	
3,8	2		M3231GT	LTCG 1/2	M3216GT	LTCG 13	M4340GT	LTCG M20
	6		M3200GW	LTCG LL 1/2	M3219GW	LTCG 16	—	—
4,0	2		—	—	M3213GAK	LTCG 11	—	—
	3		M3231GX	LTCG 1/2	M3216GX	LTCG 13	M4340GX	LTCG M20
			M3200GX	LTCG LL 1/2	M3219GX	LTCG 16	—	—
	4		M3200GY	LTCG LL 1/2	M3219GY	LTCG 16	—	—
	5		M3200GZ	LTCG LL 1/2	M3219GZ	LTCG 16	—	—
6		M3200GGB	LTCG LL 1/2	M3219GGB	LTCG 16	—	—	

Standard color black.

***Locknuts not included.** For Locknut specifications or to order Locknuts separately, see pages 3-47 & 3-48.

****Unassembled Nylon Locknuts INCLUDED.**

*****Short Thread**



Multi-hole Gland (typical)

*Quick
Specs*

Material	Nylon 6/6 with TPE Sealing Gland
Flammability Rating	94V-2 Standard
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

Heyco®-Tite Liquid Tight Cordgrips

Multi-Hole with Integral Sealing Ring

Sequenced by Conductor Size

The Ultimate in Liquid Tight Strain Relief Protection

**NO O-RING
REQUIRED!**



CONDUCTORS		 or	NPT HUB*		PG HUB**		METRIC HUB**	
Hole Size mm.	No.		 Black Part No.	specifications on page 3-1 Desc.	specifications on page 3-3 Black Part No.	Desc.	specifications on page 3-4 Black Part No.	Desc.

Round, Open Holes – consult Heyco for Snap-in-2 Hub versions

4,2	2		M3231GAB	LTCG 1/2	M3216GAB	LTCG 13	M4340GAB	LTCG M20
4,5	9		M8437GBF†	LTCG 1	M3225GBF	LTCG 29	M4348GBF	LTCG M32
	13		M4524GBG†	LTCG 1-1/4	M3204GBG	LTCG 36	M4352GBG	LTCG M40
4,6	3		M3234GBD	LTCG 3/4	M3222GBD	LTCG 21	M4344GBD	LTCG M25
	4		M3234GBE	LTCG 3/4	M3222GBE	LTCG 21	M4344GBE	LTCG M25
5,0	2		M3231GAC	LTCG 1/2	M3216GAC	LTCG 13	M4340GAC	LTCG M20
	4		M3234GAD	LTCG 3/4	M3222GAD	LTCG 21	M4344GAD	LTCG M25
5,2	2		M3231GAE†	LTCG 1/2	M3216GAE	LTCG 13	M4340GAE††	LTCG M20
	3		M3234GAF†	LTCG 3/4	M3222GAF	LTCG 21	M4344GAF	LTCG M25
	4		M3234GAG†	LTCG 3/4	M3222GAG	LTCG 21	M4344GAG	LTCG M25
5,6	3		M3200GAH†	LTCG LL 1/2	M3219GAH	LTCG 16	M3198GAH	LTCG LL M20
6,0	2		M3200GAJ	LTCG LL 1/2	M3219GAJ	LTCG 16	M3198GAJ	LTCG LL M20
	4		M3234GBC	LTCG 3/4	M3222GBC	LTCG 21	M4344GBC	LTCG M25
6,5	6		M8437GAL	LTCG 1	M3225GAL	LTCG 29	M4348GAL	LTCG M32
			M4524GAL	LTCG 1-1/4	M3204GAL	LTCG 36	M4352GAL	LTCG M40
7,0	3		M3234GAM	LTCG 3/4	M3222GAM	LTCG 21	M4344GAM	LTCG M25
7,4	2		M3234GAN	LTCG 3/4	M3222GAN	LTCG 21	M4344GAN	LTCG M25
8,0	2		M3234GAQ	LTCG 3/4	M3222GAQ	LTCG 21	M4344GAQ	LTCG M25
	6		M4524GAR	LTCG 1-1/4	M3204GAR	LTCG 36	M4352GAR	LTCG M40
9,0	4		M8437GAS	LTCG 1	M3225GAS	LTCG 29	M4348GAS	LTCG M32
	5		M4524GAT	LTCG 1-1/4	M3204GAT	LTCG 36	M4352GAT	LTCG M40
	7		M4524GAW	LTCG 1-1/4	M3204GAW	LTCG 36	M4352GAW	LTCG M40
9,5	4		M8437GAX	LTCG 1	M3225GAX	LTCG 29	M4348GAX	LTCG M32

Standard color black.

***Locknuts not included.** For Locknut specifications or to order Locknuts separately, see pages 3-47 & 3-48.

****Unassembled Nylon Locknuts INCLUDED.**

†**Assembled Metal Locknut INCLUDED**

††M4340GAE is UL approved under File E51579



- Heyco® **Multi-hole glands** provide the widest range of conductor through-hole size and number configurations, many of which are agency approved. See the tabular charts for specific approvals for specific parts. These approvals are not “global” or implied approvals; they are both real and part specific.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- IP 68 rated.
- Cordgrips are made of nylon construction with TPE sealing glands that resist salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- For body part dimensions see page 3-1, 3-3, and 3-4.
- Multi-hole glands are only to be used with Heyco Liquid Tight Cordgrips and are not sold separately.
- Consult Heyco for Cordgrips molded in other colors.

Material

Nylon 6/6 with TPE Sealing Gland

Certifications



Listed under Underwriters' Laboratories File E51579

Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements

Flammability Rating

94V-2 Standard

Temperature Range

Static -40°F (-40°C) to 239°F (115°C)

Dynamic -4°F (-20°C) to 212°F (100°C)

IP Rating

IP 68

*Quick
Specs*