



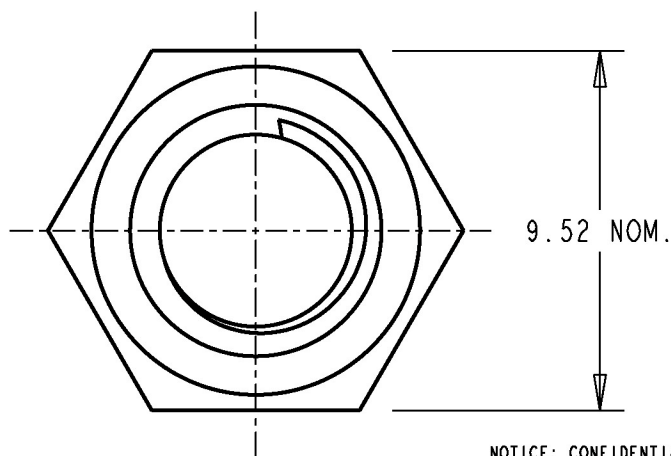

ACTUAL
SIZE

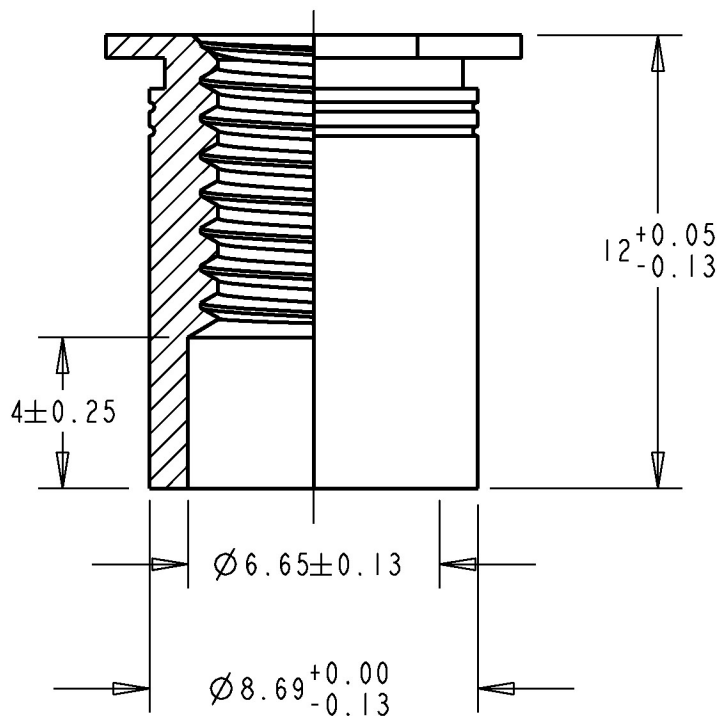

© 2005 PennEngineering

A	10/17/05	05-2247
REV	DATE	ECN #

NOTICE: CONFIDENTIAL PROPRIETARY INFORMATION. THIS PRINT CONTAINS IDEAS, INFORMATION, AND INTELLECTUAL PROPERTY WHICH ARE THE EXCLUSIVE PROPERTY OF PENNENGINEERING FASTENING TECHNOLOGIES. RECIPIENT MUST KEEP THE INFORMATION DISCLOSED HEREIN CONFIDENTIAL AND RECIPIENT IS EXPRESSLY PROHIBITED FROM COPYING OR PUBLICATION OF THIS PRINT EXCEPT TO OTHERS IN THEIR ORGANIZATION ON A NEED-TO-KNOW BASIS.

THREAD:	M6 X 1 - 6H	MOUNTING HOLE:	8.75	+0.08 -0.00
MATERIAL:	LOW CARBON STEEL	PANEL THICKNESS:	1.5 MIN.	
HEAT TREAT:	CARB & TEMPER	MAX. PANEL HARDNESS:	HRB 80	
FINISH:	ZINC PLUS CLEAR CHROMATE	MIN. CENTERLINE-TO-EDGE:	9.6	
FINISH SPEC.:	ASTM B633, SC1, TYPE III, COLORLESS	 PennEngineering®		
DESCRIPTION:	SELF-CLINCHING THRU-THREADED STANDOFF			
GEN. DRW:	SO_STD_CUST	SCALE:	5x	FROM FILE: C22-0559
CHK BY:		DWG NO.	SO-M6-12Z1	REV: A