


PERFORMANCE WHEN PROPERLY
INSTALLED INTO .060 MIN. THICK
COLD-ROLLED STEEL PANEL (HRB 45-65)



INSTALLATION: 4000 LBS. AVG.
PUSH-OUT: 560 LBS. AVG.
TORQUE-OUT: 35 IN-LBS. AVG.
PULL-THRU: 380 LBS. AVG.




ACTUAL
SIZE

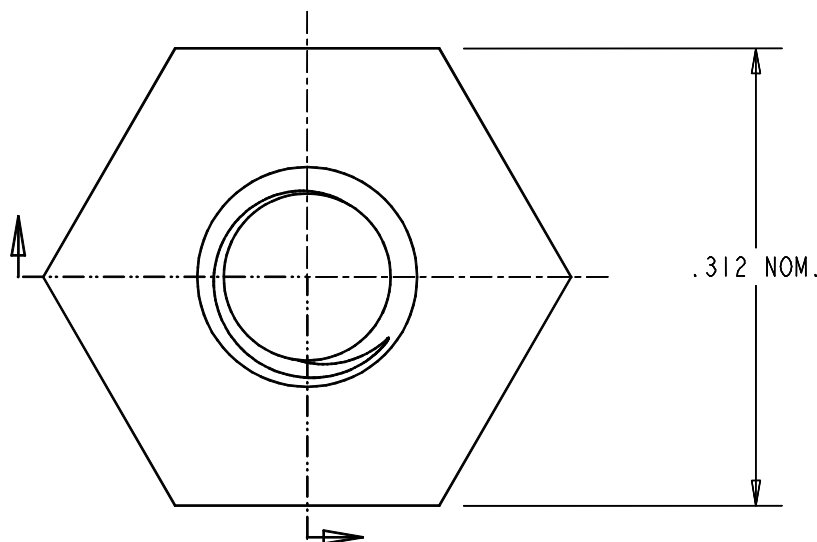

RECOMMENDED INSTALLATION PUNCH

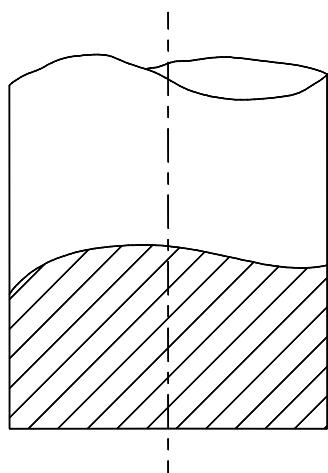

RECOMMENDED INSTALLATION ANVIL

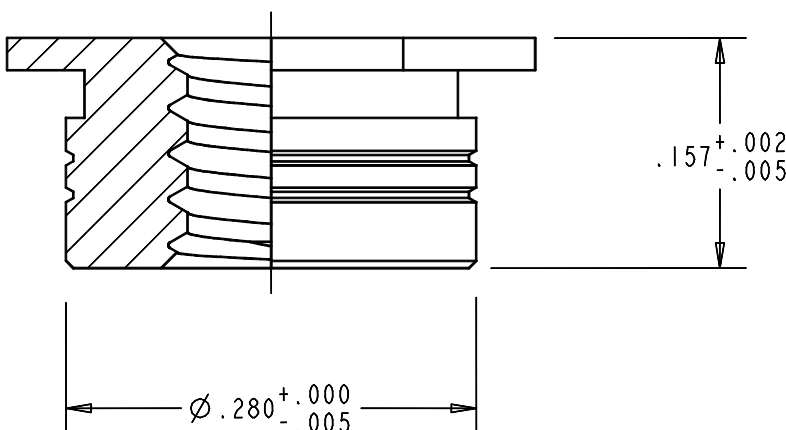

SEE PEM TECHNICAL SUPPORT SECTION OF OUR WEBSITE (WWW.PEMNET.COM) FOR RELATED STANDARDS AND SPECIFICATIONS.

© 2011 PennEngineering

NOTICE: CONFIDENTIAL PROPRIETARY INFORMATION. THIS PRINT CONTAINS IDEAS, INFORMATION, AND INTELLECTUAL PROPERTY WHICH ARE THE EXCLUSIVE PROPERTY OF PENNENGINEERING®. RECIPIENT MUST KEEP THE INFORMATION DISCLOSED HEREIN CONFIDENTIAL AND RECIPIENT IS EXPRESSLY PROHIBITED FROM COPYING OR PUBLICATION OF THIS PRINT EXCEPT TO OTHERS IN THEIR ORGANIZATION ON A NEED-TO-KNOW BASIS.

ALL DIMENSIONS IN INCHES

A	16-FEB-2011	11-0451
REV	DATE	ECN #

THREAD:	#6-32 UNC-2B	MOUNTING HOLE:	.281 ^{+.003} -.000
MATERIAL:	CARBON STEEL	PANEL THICKNESS:	.050 MIN.
CONDITION:	HEAT TREATED	MAX. PANEL HARDNESS:	HRB 80 (HB 150)
FINISH/COLOR:	ZINC PLATED, 5µm, COLORLESS	MIN. CENTERLINE-TO-EDGE:	.310
FINISH SPEC.:	SEE NOTE	 PennEngineering®	
DESCRIPTION:	SELF-CLINCHING, THRU THREADED STANDOFF		

MODEL PATH: _SOX-CSTD /SOX-DXXCUST /SOX-8DUCST /C22-1518

SCALE: 7x

DWG NO. YSO-30210-Z1

REV: A